
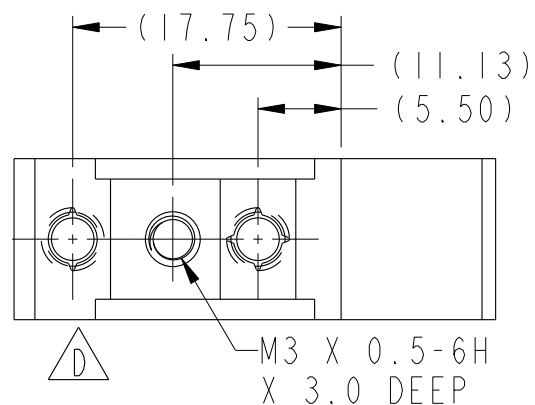


10084609-111LF

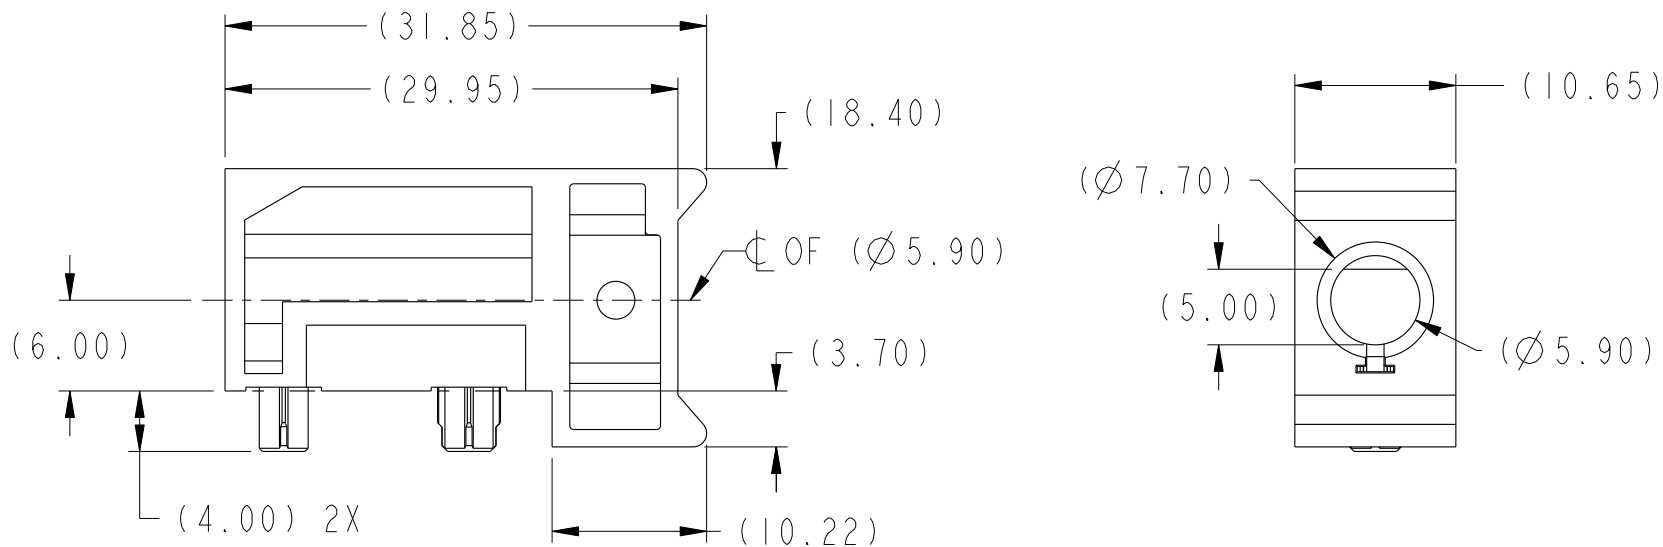

rev	ecn no	dr	date
A	S08-0174	CH	2008-06-02
B	S08-0187	CH	2008-06-13
C	S08-0336	CH	2008-10-13
D	S10-0118	YK	2010-06-02
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface3.200 ASME Y14.5		tolerance std ASME Y14.5		projection 		MM 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	C. H. TAN	2008-06-02	ANGULAR	LINEAR	0.X ±.3		size A4	Scale 1:1			
Eng	Y. K. LIM	2010-06-02			0.XX ±.10						
Chr	C. H. TAN	2010-06-02	0° ±2°		0.XXX ±.050		ECN		S10-0118		
Appr	JOEY NG	2010-06-02	Product family AirMax Accessories					Spec ref			
			title 10.8mm GUIDE MODULE HOUSING WITH KEYING OPTIONS					dwg no 10084609			Rev D
catalog no			-		CUSTOMER			sheet 1 of 3			

1

2

3

4

A

B

C


D

A

B

C

D

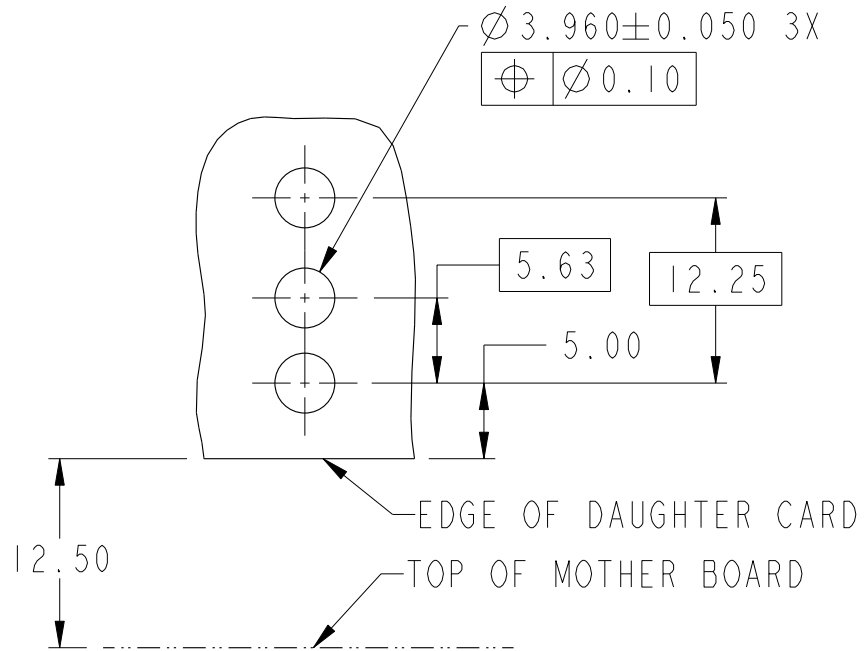

SCALE 2:1

RECOMMENDED PCB LAYOUT NOTES 4 & 5

2

	title 10.8mm GUIDE MODULE HOUSING WITH KEYING OPTIONS		dwg no 10084609		Rev. D
	catalog no -		CUSTOMER	sheet 2 of 3	

1

2

3


4

A

B

A

B

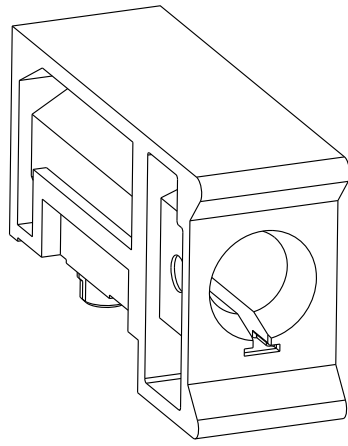

- ①. MATERIAL: ZINC ALLOY
- ②. FINISH: TRIVALENT CHROMATE IRIDESCENT
- 3. APPLICATION SPEC: GS-20-045
- ④. THRU HOLE PLATING AND ANNULAR RINGS MUST BE ADDED AS APPROPRIATE FOR APPLICATIONS WITH THE ESD GROUNDING OPTION. FINISHED HOLE SIZE IS THE SAME REGARDLESS OF PLATED BARREL OR NOT
- ⑤. REFER TO CUSTOMER DRAWING 10035911 FOR INFORMATION REGARDING PCB LAYOUT OF POWER AND GUIDE MODULES RELATIVE TO SIGNAL MODULES
- 6. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 7. PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
- 8. A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION

C

Copyright FCI.

D

C

D

2

	title 10.8mm GUIDE MODULE HOUSING WITH KEYING OPTIONS		dwg no 10084609	Rev. D
	catalog no	-	CUSTOMER	sheet 3 of 3