


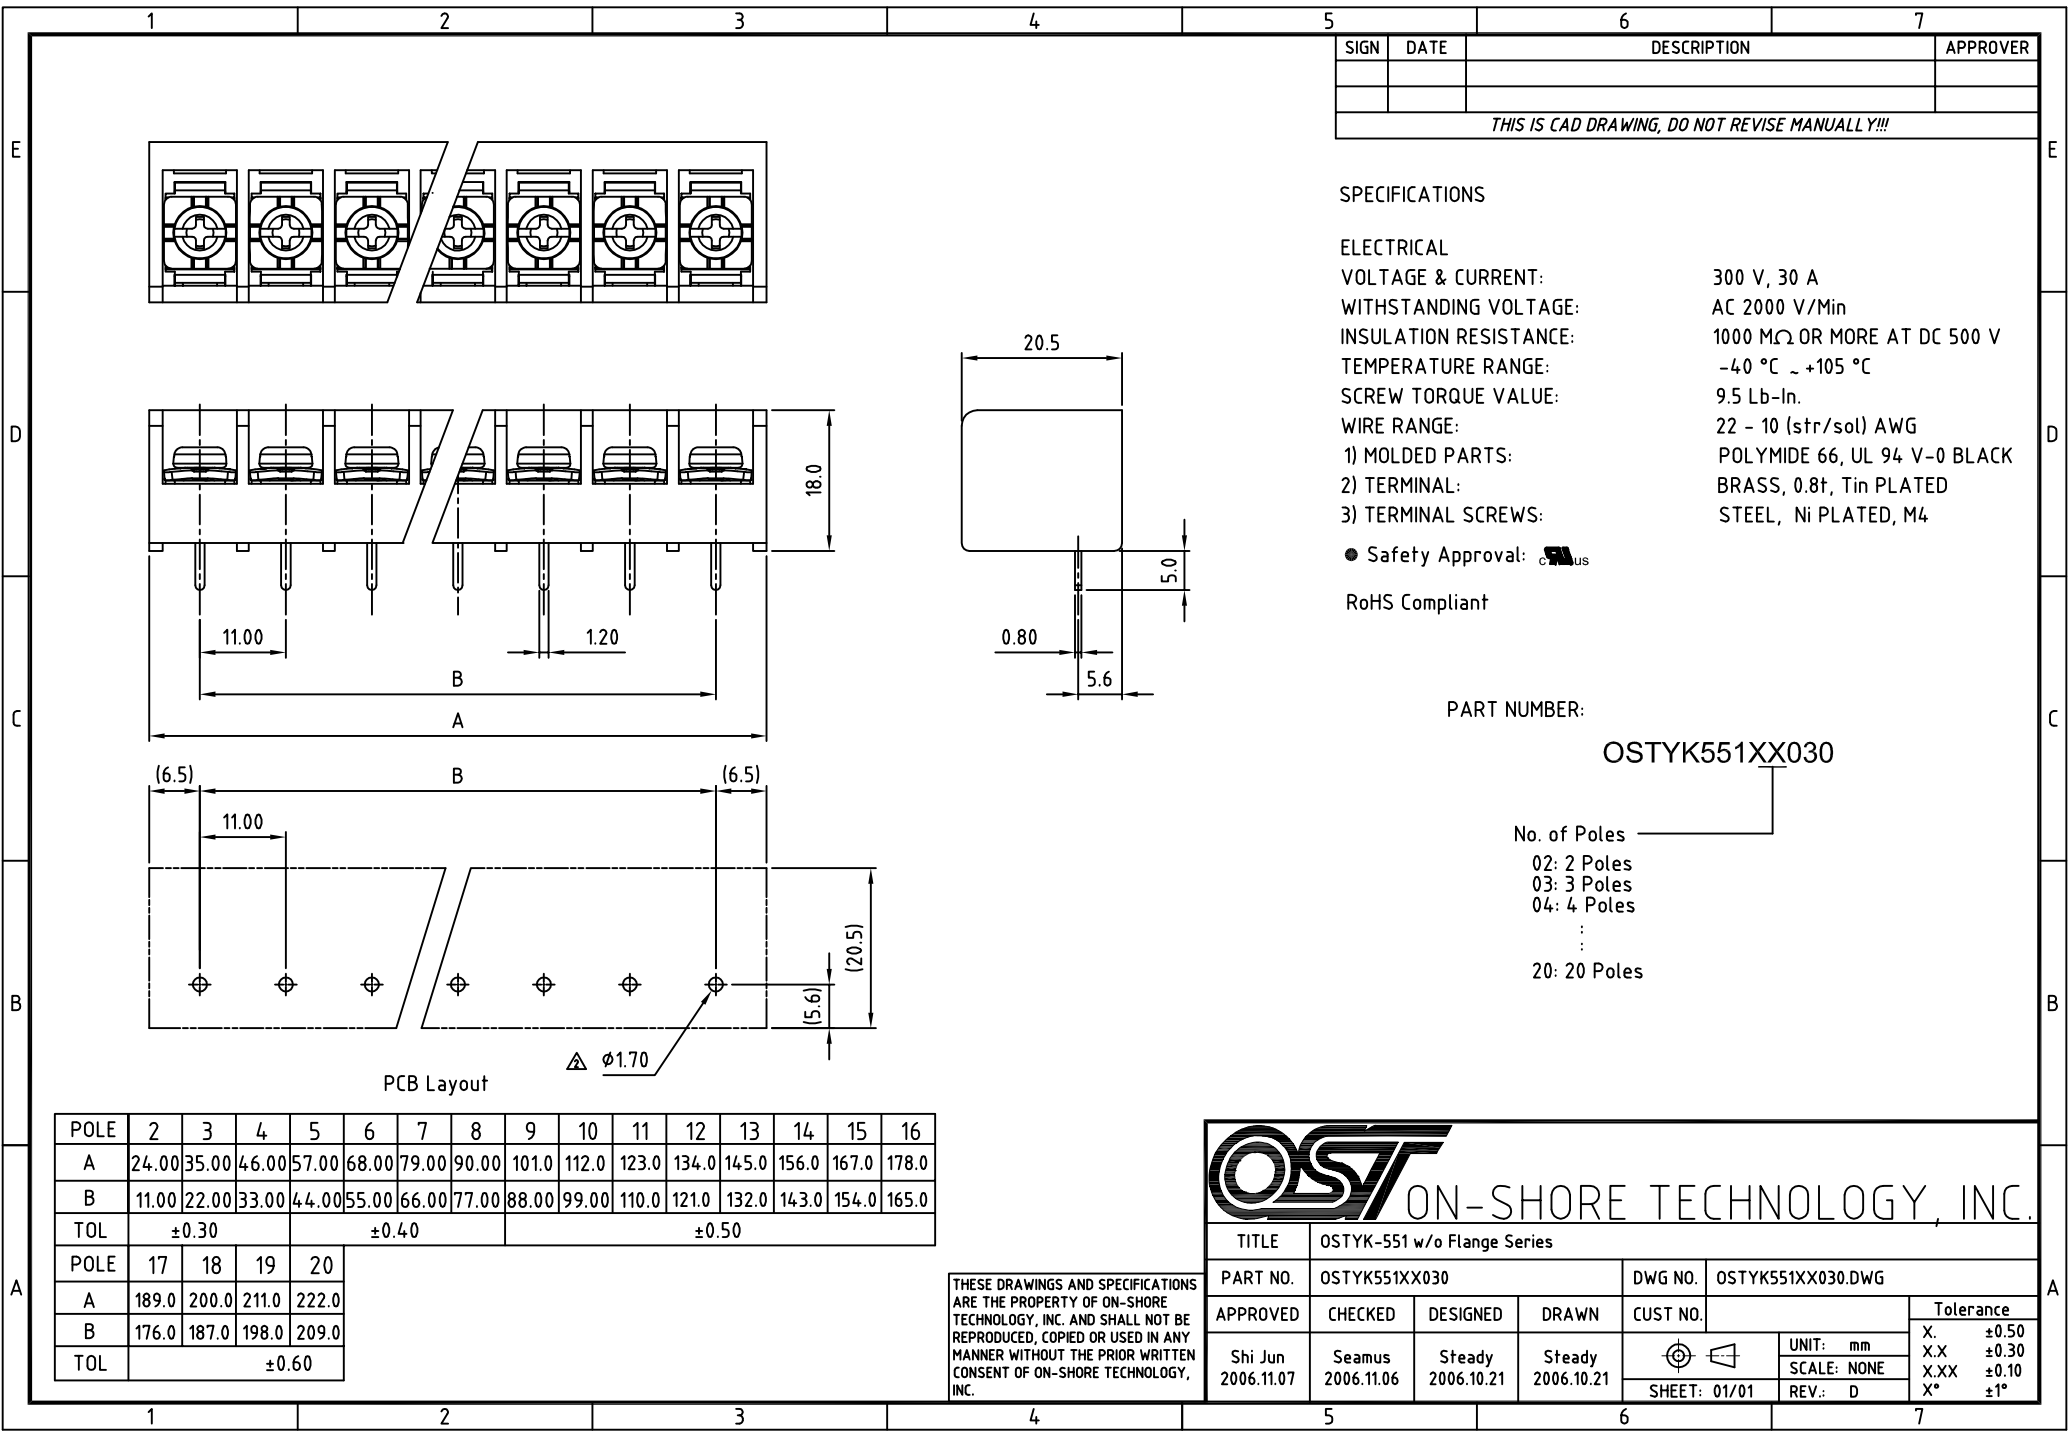

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

SPECIFICATIONS

ELECTRICAL	300 V, 30 A
VOLTAGE & CURRENT:	AC 2000 V/Min
WITHSTANDING VOLTAGE:	1000 MΩ OR MORE AT DC 500 V
INSULATION RESISTANCE:	-40 °C ~ +105 °C
TEMPERATURE RANGE:	9.5 Lb-In.
SCREW TORQUE VALUE:	22 - 10 (str/sol) AWG
WIRE RANGE:	POLYIMIDE 66, UL 94 V-0 BLACK
1) MOLDED PARTS:	BRASS, 0.8t, Tin PLATED
2) TERMINAL:	STEEL, Ni PLATED, M4
3) TERMINAL SCREWS:	

● Safety Approval: 

RoHS Compliant

PART NUMBER:

OSTYK551XX030

No. of Poles
02: 2 Poles
03: 3 Poles
04: 4 Poles
⋮
20: 20 Poles

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	24.00	35.00	46.00	57.00	68.00	79.00	90.00	101.0	112.0	123.0	134.0	145.0	156.0	167.0	178.0
B	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00	110.0	121.0	132.0	143.0	154.0	165.0
TOL	±0.30			±0.40				±0.50							
POLE	17	18	19	20											
A	189.0	200.0	211.0	222.0											
B	176.0	187.0	198.0	209.0											
TOL	±0.60														

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

ON-SHORE TECHNOLOGY, INC.							
TITLE	OSTYK-551 w/o Flange Series						
PART NO.	OSTYK551XX030			DWG NO.	OSTYK551XX030.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
Shi Jun 2006.11.07	Seamus 2006.11.06	Steady 2006.10.21	Steady 2006.10.21		UNIT: mm	Tolerance	
SHEET: 01/01					SCALE: NONE	X.X	±0.50
					REV: D	X.XX	±0.30
						X°	±1°