


Features

- ◆ Very high power density in DIP-24 package
- ◆ Wide 2:1 input range
- ◆ Very high efficiency up to 87%
- ◆ I/O isolation 1500V
- ◆ Input filter to meet EN 55022, class A without ext. components
- ◆ Low ripple and noise
- ◆ Continuous short circuit protection
- ◆ Operating temp. range -40°C to +71°C
- ◆ 3-year product warranty

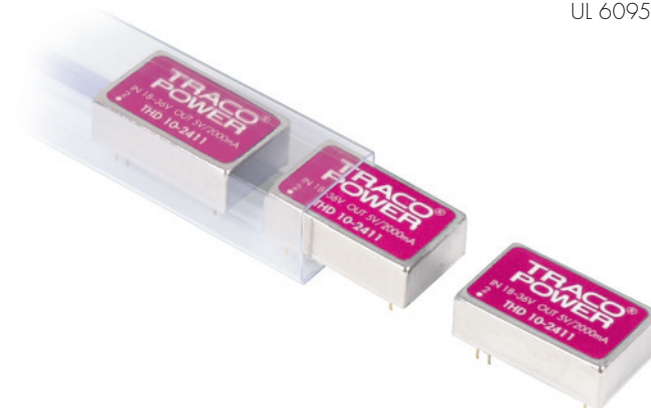

The THD-10 series is a range of isolated high performance 10W DC/DC converters in a low profile DIP-24 package with standard industry pin-out. Other features of this product are built-in overvoltage protection and internal EMI-filter to meet EN 55022, class A. Full SMD-design with exclusive use of ceramic capacitors guarantees a high reliability and long product lifetime. Typical applications for these converters are industrial electronics, instrumentation, data communication systems and battery operated equipment with limited space available on the PCB.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
THD 10-1210	9 – 18 VDC (12 VDC nominal)	3.3 VDC	3'000 mA	82 %
THD 10-1211		5.1 VDC	2'000 mA	83 %
THD 10-1212		12 VDC	830 mA	87 %
THD 10-1222		± 12 VDC	± 415 mA	87 %
THD 10-1223		± 15 VDC	± 330 mA	86 %
THD 10-2409	18 – 36 VDC (24 VDC nominal)	2.5 VDC	3'000 mA	83 %
THD 10-2410		3.3 VDC	3'000 mA	85 %
THD 10-2411		5.1 VDC	2'000 mA	87 %
THD 10-2412		12 VDC	830 mA	87 %
THD 10-2422		± 12 VDC	± 415 mA	88 %
THD 10-2423		± 15 VDC	± 330 mA	87 %
THD 10-4809	36 – 75 VDC (48 VDC nominal)	2.5 VDC	3'000 mA	83 %
THD 10-4810		3.3 VDC	3'000 mA	85 %
THD 10-4811		5.1 VDC	2'000 mA	87 %
THD 10-4812		12 VDC	830 mA	87 %
THD 10-4822		± 12 VDC	± 415 mA	88 %
THD 10-4823		± 15 VDC	± 330 mA	87 %

Input Specifications

Input current (no load)	12 Vin models	40 mA typ.
	24 Vin models	20 mA typ.
	48 Vin models	10 mA typ.
Input current (full load)	12 Vin models	1000 mA typ.
	24 Vin; 2.5.Vout models	380 mA typ.
	24 Vin; other output models	480 mA typ.
	48 Vin; 2.5.Vout models	190 mA typ.
	48 Vin; other output models	240 mA typ.
Start-up voltage / under voltage shut down	12 Vin models	9 VDC / 8.5 VDC
	24 Vin models	18 VDC / 17 VDC
	48 Vin models	36 VDC / 34 VDC
Surge voltage (1 sec. max.)	12 Vin models	25 V max.
	24 Vin models	50 V max.
	48 Vin models	100 V max.
Reverse voltage protection		0.5 A max.
Conducted noise (input)		EN 55022 level A, FCC part 15, level A

Output Specifications

Voltage set accuracy		±1.2 %
Regulation	– Input variation Vin min. to Vin max.	1.0 % max.
	– Load variation 10 – 100 %	1.2 % max. (±1.5 % max. for 2.5 Vout models)
Ripple and noise (20 MHz bandwidth)		85 mVpk-pk max.
Temperature coefficient		±0.02 %/K
Output current limitation		>110 % of Iout max., constant current
Short circuit protection		indefinite (automatic recovery)
Capacitive load	2.5, 3.3, 5.1 Vout models:	2'000 µF max.
	12 / ±12 Vout models:	820 µF max. / ±220 µF max. (each output)
	15 / ±15 Vout models:	470 µF max. / ±150 µF max. (each output)

General Specifications

Temperature ranges	– Operating	–40°C to +71°C
	– Casing	+95°C max.
	– Storage	–55°C to +125°C
Derating (convection cooling)		3.0 %/K above +60°C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		>1 Mio. h
Isolation voltage (60 sec.) Input/Output		1'500 VDC
Isolation capacitance Input/Output		1'200 pF typ
Isolation resistance Input/Output (500 VDC)		>1'000 M Ohm
Switching frequency (fixed)		400 kHz typ. (pulse width modulation PWM)
Safety standards		UL/cUL 60950-1, EN 60950-1, IEC 60950-1
Safety approvals	– CSA certificate according UL 60950-1	www.tracopower.com/products/thd10-csa.pdf

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Casing material	steel, nickel plated
Baseplate material	non conductive FR4
Potting material	silicon rubber TES (UL94V-0 rated)
Weight	17.3 g (0.61 oz)
Soldering temperature	max. 265°C / 10 sec.

Technical drawing of a rectangular plate. The main view shows a plate with a total width of 31.8 (1.25) and a total height of 22.86 (0.90). The plate is divided into four horizontal sections by three internal features. The dimensions for these sections are: 4.5 (0.18) for the top section, 2.54 (0.10) for the first internal section, 15.24 (0.60) for the middle section, and 5.08 (0.20) for the bottom section. The plate is mounted on an "Insulated Baseplate". The baseplate has a width of 4.1 (0.16) and a height of 10.2 (0.40). The bottom view shows a rectangular plate with a width of 20.3 (0.80) and a height of 15.24 (0.60). The bottom view also shows four holes: two on the left side (holes 23 and 22) and two on the right side (holes 16 and 14). The distance from the left edge to the center of the left holes is 2.5 (0.10). The distance from the right edge to the center of the right holes is 2.5 (0.10).

Pin-Out		
Pin	Single	Dual
2	−Vin (GND)	−Vin (GND)
3	−Vin (GND)	−Vin (GND)
9	No pin.	Common
11	No con.	−Vout
14	+Vout	+Vout
16	−Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

Dimensions in [mm], () = Inch
Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02 ± 0.002)
Tolerances ± 0.5 (± 0.02)
Pin pitch tolerances ± 0.35 (± 0.014)