

MID POWER

SPEC Pak®

Sealed Power For Environmental Connections



Marine | Wind Power | Lighting | Transportation | Pumps | Ground Support
Machine Tool | Industrial Automation | Motor | Solar Power | Harsh Environments




APP
Anderson Power Products®

Rugged and Sealed (IP68) Plugs and Receptacles

The SPEC Pak® Mid Power is rugged and environmentally sealed (IP68). It leverages APP's core Powerpole® flat wiping contact technology, offering power handling capabilities up to 80 amps at 600 volts with signal.

The SPEC Pak® Mid Power shells are highly configurable. They accept up to four Powerpole® 75 (PP75) contacts and housings. They also accept up to 8 pin and socket auxiliary contacts providing the user signal and/or sequencing options. Assembly is made easy through the use of colored Powerpole® housings which can be matched to wire colors. They will accept wire sizes ranging from 12 to 6 AWG [3.3 to 13.3 mm²]. SPEC Pak® Mid Power is highly configurable providing users with a multitude of flexible design solutions in a single interconnect.

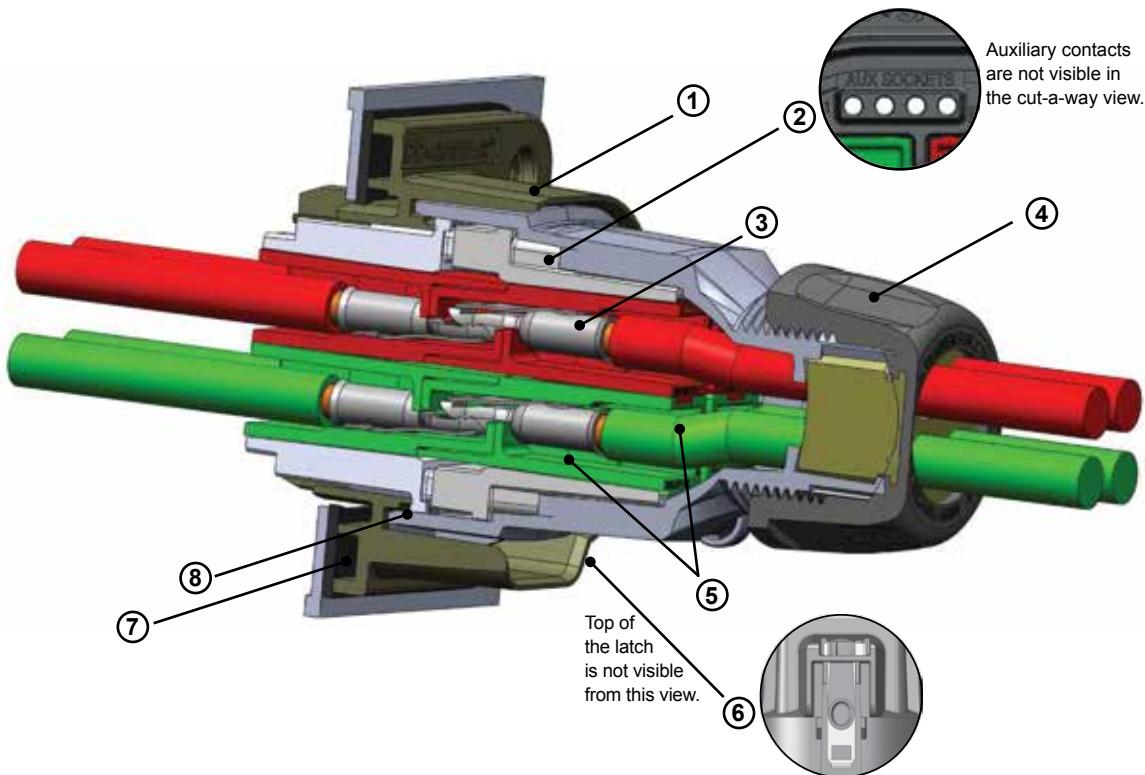

1 - Chemical & UV Resistant Ruggedized Shells

- Wire to Wire Configurations
- Wire to Panel Configurations

2 - Auxiliary Contacts for Signal and/or Sequencing (up to 8)

3 - Power Contacts (up to 4)

4 - Sealing Gland to Ensures (IP68) Environmental Seal

5 - Color Coded Powerpole® Housings to Match Wire Colors

6 - Stainless Steel Latches to Prevent Accidental Unmating

7 - IP68 Panel Mount Receptacle Gasket

8 - Sealing O-Ring Ensures (IP68) Environmental Seal

Specifications

SPEC Pak® Shells Used With

	SPEC Pak® Shell	Powerpole® Power Contacts & Housings	Auxiliary Contacts ^[1] (PowerMod® Series)
Electrical			
Current Rating (Amperes)			
UL 1977	-	80 ^[2]	5
CSA (30° C Rise)	-	50 ^[2]	5
Voltage Rating			
UL 1977 (AC/DC)	-	600	600
Dielectric Withstanding (AC)	-	3,000	-
Contact Resistance Milliohms (average)	-	0.200 ^[3]	2.000 ^[4]
Hot Plug Amp Rating (UL 1977)			
250 Cycles at 120V	-	50 ^[5]	
Mechanical			
Environmental Seal			
IP rating	IP68	-	-
Submersion (UL 50E)	Pass	-	-
Wire Size			
-		12 to 6 AWG	24 to 12 AWG
-		3.3 to 13.3 mm ²	0.50 to 2.5 mm ²
Operating Temperature			
-40° to 105° C		-20° to 105° C	-40° to 105° C
-40° to 221° F		-4° to 221° F	-40° to 221° F
Mating Cycles (no load)			
Silver Plated Contacts	-	1,500	-
Gold Plated Contacts	-	-	1,500
Contact Retention Force	-	> 50 lbf / 222 N	-
Insertion Force	-	28 lbf	
Touch Safe (IEC 60529)	-	IP10	-
Drop Test (UL50E)	Pass	-	-
Panel Break Off (EIA 394-97)	Pass	-	-
Crush Test (EIA 364-40B)	Pass	-	-
Materials			
Shell / Housing	PC/PBT	PC	PC/PBT
Powerpole® Holder	PC/PBT	-	-
Latch	Stainless Steel	-	-
Flammability (UL 94)	V0	V0	V0
Weatherability (UL 764C)	F1	F1	F1
Contacts			
Base	-	Copper Alloy	Copper Alloy
Plating	-	Silver	Gold over Nickel

NOTES:

1. Integral signal holders that holds up to 8 pins and 8 sockets.
2. Based on 6 AWG.
3. Based on 6 AWG 1-1/4" distance between probes.
4. Based on 20 AWG.
5. Hot Plug testing completed using individual Powerpole® housings and contacts, not installed in SPEC Pak® shells.




For other industry tests and/or agency approvals, contact customer service.

Product Selection Guide


SPEC Pak® is a highly configurable environmentally sealed connector, that can be purchased as components in bulk for volume production, or pre-packaged as a kit. For convenience, follow the steps below to determine component or kit part numbers.

| COMPONENT PART NUMBER GUIDE (FOR COMPONENT BULK PURCHASE) |

Step 1: Select Shell




SK6-076C04
Plug



SK1-076C04
Inline Receptacle

* Select Shell Style, from page 6.



SK2-076C04
Panel Mount Receptacle

Step 2: Select Wire Protection



* Define:

Number of Wires Wire OD

Wires

- Discrete _____

- Bundled _____

* Select wire protection that will accommodate the number of wires and outer diameter (OD) of the wire used in your application, from page 6.

* Wire protection is required for use with inline receptacles and plugs to obtain IP68 seal.

List Component Part Numbers Here:

| KIT PART NUMBER GUIDE (FOR KITTED CONNECTOR PURCHASE) |

Step 1 - (see page 6)

Shell					
SPEC Pak® Series	Shell Color	Shell Style (Select One)	Dash	Shell Size	Insert Arrangement
S	K	1 = Inline Receptacle 2 = Panel Mount Receptacle 6 = Straight Plug 9 = Receptacle Cover 9P = Plug Cover	-	076	C04

List Kit Part Number Here:


Receptacle Kit Part Number:

S K _____ - 076 C04

Plug Kit Part Number:

S K _____ - 076 C04

Step 3: Select Housing Arrangement




* Define:

Housing Arrangement	Number of Wires	Number of Auxiliaries
- AC Single Phase	_____	_____
- AC 3 Phase	_____	_____
- DC	_____	_____
- Other	_____	_____

* Select housing arrangement colors appropriate for your AC or DC application, from page 7.

Step 4: Select Contacts



Pin Auxiliary Contact



Socket Auxiliary Contact

* Define:

Contacts	Number of Circuits	Wire Gauge
- Power	_____	_____
- Auxiliary	_____	_____
- Other	_____	_____
Amps (continuous):	_____	Max amps at _____ volts

* Select power and/or auxiliary contacts appropriate for your wire size (AWG or mm²), from page 7.

List Component Part Numbers Here:

Step 2 - (see page 6)

..... Wire Protection

Number of Holes Cable Sealing Range
(Select Two)

Dash

00 = None
PS = Plastic Single-hole
PM = Plastic Multi-hole

00 = None
01 - 99 = Various Gland Types
(See Page 6)

NOTE: Panel Mount Receptacle is always "00 00".

Step 3 - (see page 7)

.. Housing Arrangement ..

(Select One)

0 = Custom Configuration
A = AC Single Phase
B = AC 3 Phase, 3 Wire
C = DC Circuit, 4 Wire
Z = All Black

Step 4 - (see page 7)

..... Contacts

(Select One)

Dash

- Contact the factory
Custom Configuration

0 = Custom Configuration
70 = 1307 Contact for #6 AWG (13.3 mm²)
71 = Please inquire for #8 AWG (8.4 mm²)
72 = 5953 Contact for #10/12 AWG (3.3 to 5.3 mm²)


Ordering Information

PLUG SHELL KIT

Part Number & Description

SK6-076C04

- Plug shell
- Powerpole® holder - plug
- Powerpole® holder retaining screws M3.5 x 15mm
- Sealing Gland Nut
(Sealing grommet sold separately)




PANEL MOUNT RECEPTACLE KIT

Part Number & Description

SK2-076C04

- Panel mount receptacle shell
- Powerpole® holder - receptacle
- Panel mount receptacle gasket
- Powerpole® holder retaining screws M3.5 x 15mm




INLINE RECEPTACLE KIT

Part Number & Description

SK1-076C04

- Inline receptacle shell
- Powerpole® holder - receptacle
- Powerpole® holder retaining screws M3.5 x 15mm
- Sealing Gland Nut
(Sealing grommet sold separately)



COVER KIT


Part Number & Description

SK9-076

Receptacle Cover Kit
- Cover (IP68) with lanyard

SK9P-076

Plug Cover Kit
- Cover (IP68) with lanyard



Component Replacement Parts

Part Number	Description
115129P1	Panel Mount Receptacle Gasket
H1120P53	Powerpole holder retaining screws M3.5 x 15mm

NOTE:


Mounting Hardware (4 each M4 or #8 screws) not included.
Recommended torque for mounting hardware is 7-10 in-lbs.

WIRE PROTECTION - CABLE GLAND

Material	
Shell	PBT/PC
Sealing Grommet	EPDM
Flammability (UL 94)	V0
Weatherability (UL 764C)	F1
Color	Black

Mechanical	
IP Rating	IP68
Operating Temperature (UL 1977)	-40° to 105° C -40° to 221° F
Thread Type	Integrated into inline receptacle & plug shells

Torque Requirements
Hand tighten. Using a 44 mm wrench or strap wrench, tighten an additional 3/4 - 1 turn.



Wire Protection

Straight Plastic Single & Multi Hole Cable Gland

Number of Holes	Cable Range Wire Outer Diameter mm (in)	Wrench Size Sealing Nut	Protection Designation	Sealing Grommet Only		Sealing Glands (includes sealing grommet & wire protection nut)	
				Part Number	For use with	Part Number	For use with shell kit components purchased in bulk.
1	18.0 - 24.0 mm (0.79" - 0.85")	44	PS 01	B02130P7	SK1-076C04 &	PS1T40-24X	
2	3.8 - 5.0mm (0.15" - 0.20")	44	PM 21	B02130P12	SK6-076C04	PS2T40-5X	
2	6.0 - 7.2mm (0.24" - 0.28")	44	PM 22	B02130P11		PS2T40-7X	
2	7.0 - 9.0mm (0.28" - 0.35")	44	PM 23	B02130P10		PS2T40-9X	
3	3.8 - 5.0mm (0.15" - 0.20")	44	PM 31	B02130P6		PS3T40-5X	
3	6.0 - 7.2mm (0.24" - 0.28")	44	PM 32	B02130P5		PS3T40-7X	
3	7.0 - 9.0mm (0.28" - 0.35")	44	PM 33	B02130P4		PS3T40-9X	
4	3.8 - 5.0mm (0.15" - 0.20")	44	PM 41	B02130P3		PS4T40-5X	
4	6.0 - 7.2mm (0.24" - 0.28")	44	PM 42	B02130P2		PS4T40-7X	
4	7.0 - 9.0mm (0.28" - 0.35")	44	PM 43	B02130P1		PS4T40-9X	

C04 Housing Arrangement

Configured with up to 4 PP75 Contacts - Up to 80 Amps

Standard Housing Arrangements |

E = Empty

0 Custom Configuration

AC Single Phase

A	5916G4	5916G5
	5916G6	E

AC 3 Phase, 3 Wire

B	5916G4	5916G5
	5916G7	E

DC 2 Circuit, 4 Wire


C	5916G4	5916G4
	5916G7	5916G7

All Black

Z	5916G4	5916G4
	5916G4	5916G4

TEMPERATURE CHART |

Mid Power SPEC Pak®
Four Power Contacts / Eight Signal Contacts 5A

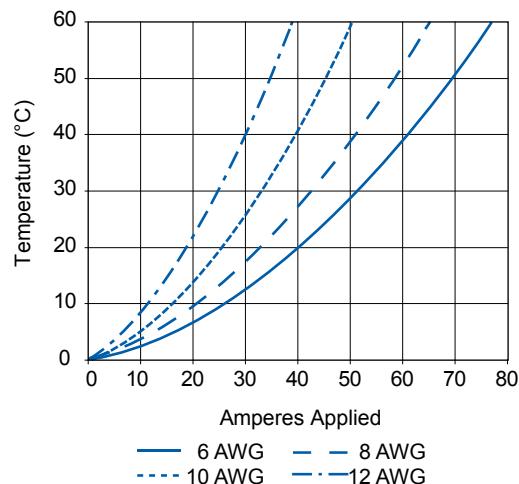


Ordering Information

PP75 Standard Power Contacts, Signal Contacts & Housings

Description ----- Part Number -----


Minimum Quantity ..	1000	100
Red	5916G7-BK	5916G7	
Green	5916G6-BK	5916G6	
Black	5916G4-BK	5916G4	
White	5916G5-BK	5916G5	
Blue	5916-BK	5916	
Yellow	5916G15-BK	5916G15	
Orange	5916G14-BK	5916G14	
Gray	5916G16-BK	5916G16	



Spacer & Keying Accessory

Description ----- Part Number -----

Minimum Quantity	1000	100
Red, Short	1399G23-BK	1399G23	
Red, Long	1399G21-BK	1399G21	



PP75 Silver Plated Wire Contacts

Type	AWG	mm²	Mating Force	-- Part Numbers --	Contact Code Designation	Hand Tool	Pneumatic		
						Tool	Die	Locator	
For use with 6 AWG									
Individual 6	13.3	Low	1307-BK	1307	70	1309G4	1387G1	1388G6	1389G6
Individual 8	8.4	Low	Please inquire		71				
Individual 12 to 10	3.3 to 5.3	Low	5953-BK	5953	72	For use with 12/10 AWG			1309G4
						1387G1	1388G7	1389G6	

Auxiliary Contacts (PowerMod® series)


Type	AWG	mm²	---	Part Number ---
Minimum Quantity.....		500	50
Standard Length 7.7mm				
Pin	24 to 20	0.50 to 0.75	PM16P2024S30	PM16P2024S30-50
Pin	20 to 18	0.75 to 1.00	PM16P1620S30	PM16P1620S30-50
Pin	16 to 14	1.00 to 1.5	PM16P1416S30	PM16P1416S30-50
Pin	12	2.50	PM16P12S30	PM16P12S30-50
Pre-Mate 9.3mm				
Pin	24 to 20	0.50 to 0.75	PM16P2024A30	PM16P2024A30-50
Pin	20 to 18	0.75 to 1.00	PM16P1620A30	PM16P1620A30-50
Pin	16 to 14	1.00 to 1.5	PM16P1416A30	PM16P1416A30-50
Pin	12	2.50	PM16P12A30	PM16P12A30-50
Post-Mate 6.4mm				
Pin	24 to 20	0.50 to 0.75	PM16P2024C30	PM16P2024C30-50
Pin	20 to 18	0.75 to 1.00	PM16P1620C30	PM16P1620C30-50
Pin	16 to 14	1.00 to 1.5	PM16P1416C30	PM16P1416C30-50
Pin	12	2.50	PM16P12C30	PM16P12C30-50
Socket	24 to 20	0.25 to 0.50	PM16S2024S32	PM16S2024S32-50
Socket	20 to 16	0.50 to 1.30	PM16S1620S32	PM16S1620S32-50
Socket	16 to 14	1.30 to 2.10	PM16S1416S32	PM16S1416S32-50
Socket	12	2.5	PM16S12S32	PM16S12S32-50

Hand Tool	Hand		Pneumatic	
	Tool	Locator	Tool	Locator
For use with pins				
PM1000G1	TM0001	TL0001	TP0001	TL0001
For use with sockets				
PM1000G1	TM0001	TL0002	TP0002	TL0002


Dimensions

| PLUG MID POWER FOR PP75 HOUSINGS |


Top View




Front View



Side View




Mated View




| PANEL MOUNT RECEPTACLE MID-POWER FOR PP75 |


Panel Cut Out




Front View



Side View




Mated View




| INLINE RECEPTACLE MID-POWER FOR PP75 |


Top View




Front View



Side View




Mated View

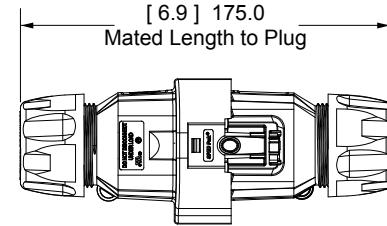

| PLUG COVER KIT |


Front View

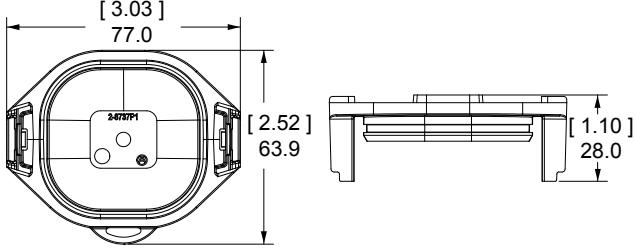


Side View

| RECEPTACLE COVER KIT |

Front View



Side View



All Data Subject To Change Without Notice

"SPEC Pak, PowerMod, Powerpole, A, APP & Anderson Power Products are registered trademarks of Anderson Power Products".

15374 DS-MPSPAK REV 02

HEADQUARTERS: Anderson Power Products®, 13 Pratts Junction Road, Sterling, MA 01564-2305 USA T:978-422-3600 F:978-422-0128

EUROPE: Anderson Power Products® Ltd., Unit 3, Europa Court, Europa Boulevard, Westbrook, Warrington, Cheshire, WA5 7TN United Kingdom T: +44 (0) 1925 428390 F: +44 (0) 1925 520203

ASIA / PACIFIC: IDEAL Anderson Asia Pacific Ltd., Unit 922-928 Topsail Plaza, 11 On Sum Street, Shatin N.T., Hong Kong T:+(852) 2636 0836 F:+(852) 2635 9036

CHINA: IDEAL Anderson Technologies (Shenzhen) Ltd., Block A8 Tantou Western Industrial Park, Songgang Baoan District, Shenzhen, PR. China 518105 T: +(86) 755 2768 2118 F: +(86) 755 2768 2218

TAIWAN: IDEAL Anderson Asia Pacific Ltd., Taiwan Branch, 4F-2, No.116, Dadun 20th St., Situn District, Taichung City 407, Taiwan (R.O.C.) T: +(886) 4 2310 6451 F: +(886) 4 2310 6460

www.andersonpower.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Anderson Power Products:](#)

[115125G1](#) [115126G1](#) [115150G1](#) [3-6014P1](#) [3-6015P1](#) [115129P1](#)