

Automotive-grade dual N-channel 60 V, 35 mΩ typ., 6.5 A STripFET™ F3 Power MOSFET in PowerFLAT™ 5x6 double island

Datasheet - production data


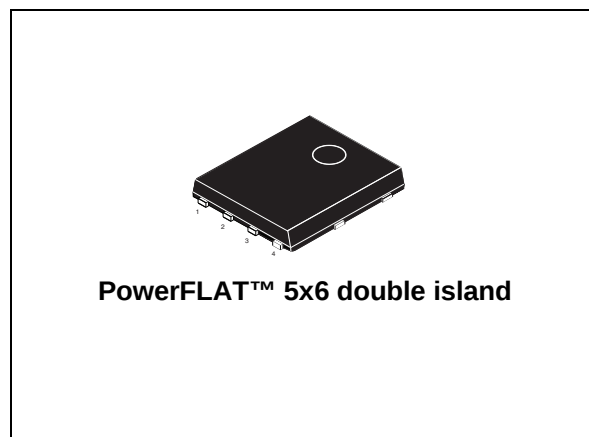


Figure 1. Internal schematic diagram

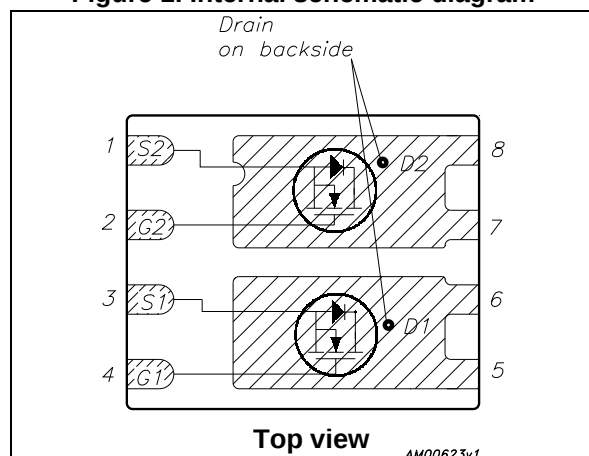

Features

Order code	V _{DS}	R _{DS(on)} max	I _D
STL7DN6LF3	60 V	43 mΩ	6.5 A

- Designed for automotive application and AEC-Q101 qualified
- Logic level V_{GS(th)}
- 175 °C junction temperature
- 100% avalanche rated
- Wettable flank package

Applications

- Switching applications

Description

This device is a dual N-channel Power MOSFET developed using STripFET™ F3 technology. It is designed to minimize on-resistance and gate charge to provide superior switching performance.

Table 1. Device summary

Order code	Marking	Package	Packaging
STL7DN6LF3	7DN6LF3	PowerFLAT™ 5x6 double island ⁽¹⁾	Tape and reel

1. For wettable flank option, please contact ST sale offices.

Contents

1 **Electrical ratings** 3

2 **Electrical characteristics** 4

 2.1 Electrical characteristics (curves) 6

3 **Test circuits** 8

4 **Package information** 9

5 **Packaging information** 15

6 **Revision history** 17



1 Electrical ratings

Table 2. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{DS}	Drain-source voltage	60	V
V_{GS}	Gate-source voltage	± 20	V
$I_D^{(1),(2)}$	Drain current (continuous) at $T_C = 25^\circ\text{C}$	20	A
$I_D^{(1)}$	Drain current (continuous) at $T_C = 100^\circ\text{C}$	16	A
$I_D^{(4)}$	Drain current (continuous) at $T_{pcb} = 25^\circ\text{C}$	6.5	A
$I_D^{(4)}$	Drain current (continuous) at $T_{pcb}=100^\circ\text{C}$	4.6	A
$I_{DM}^{(3),(4)}$	Drain current (pulsed)	26	A
P_{TOT}	Total dissipation at $T_C = 25^\circ\text{C}$	52	W
$P_{TOT}^{(4)}$	Total dissipation at $T_{pcb} = 25^\circ\text{C}$	4.3	W
I_{AV}	Not-repetitive avalanche current	6.5	A
$E_{AS}^{(5)}$	Single pulse avalanche energy	190	mJ
T_J T_{stg}	Operating junction temperature Storage temperature	-55 to 175	$^\circ\text{C}$

1. Specified by design. Not subject to production test.
2. Current is limited by bonding, with an $R_{thJC} = 2.9^\circ\text{C/W}$ the chip is able to carry 22 A at 25°C .
3. Pulse width limited by safe operating area
4. When mounted on FR-4 board of 1inch^2 , 2oz Cu, $t < 10\text{ sec}$
5. Starting $T_J = 25^\circ\text{C}$, $I_D = 8\text{ A}$, $V_{DD} = 25\text{ V}$

Table 3. Thermal resistance

Symbol	Parameter	Value	Unit
$R_{thj-case}$	Thermal resistance junction-case	2.9	$^\circ\text{C/W}$
$R_{thj-pcb}^{(1)}$	Thermal resistance junction-pcb	35	$^\circ\text{C/W}$

1. When mounted on FR-4 board of 1inch^2 , 2oz Cu, $t < 10\text{ sec}$

2 Electrical characteristics

($T_{CASE} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

Table 4. On/off states

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source breakdown voltage ($V_{GS} = 0$)	$I_D = 250\text{ }\mu\text{A}$	60			V
I_{DSS}	Zero gate voltage drain current ($V_{GS} = 0$)	$V_{DS} = 60\text{ V}$			1	μA
I_{GSS}	Gate body leakage current ($V_{DS} = 0$)	$V_{GS} = \pm 20\text{ V}$			± 100	nA
$V_{GS(th)}$	Gate threshold voltage	$V_{DS} = V_{GS}$, $I_D = 250\text{ }\mu\text{A}$	1		2.5	V
$R_{DS(on)}$	Static drain-source on-resistance	$V_{GS} = 10\text{ V}$, $I_D = 3\text{ A}$ $V_{GS} = 5\text{ V}$, $I_D = 3\text{ A}$		35 48	43 60	$\text{m}\Omega$ $\text{m}\Omega$

Table 5. Dynamic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input capacitance	$V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$, $V_{GS} = 0$	-	432	-	pF
C_{oss}	Output capacitance		-	93	-	pF
C_{rss}	Reverse transfer capacitance		-	10.5	-	pF
Q_g	Total gate charge	$V_{DD} = 30\text{ V}$, $I_D = 6.5\text{ A}$ $V_{GS} = 10\text{ V}$, Figure 13	-	8.7	-	nC
Q_{gs}	Gate-source charge		-	1.9	-	nC
Q_{gd}	Gate-drain charge		-	1.9	-	nC
R_G	Intrinsic gate resistance	$f = 1\text{ MHz}$ open drain	-	6.3	-	Ω

Table 6. Switching times

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	$V_{DD} = 30\text{ V}$, $I_D = 3\text{ A}$, $R_G = 4.7\text{ }\Omega$, $V_{GS} = 10\text{ V}$ Figure 12	-	6.7	-	ns
t_r	Rise time		-	10.4	-	ns
$t_{d(off)}$	Turn-off delay time		-	32.4	-	ns
t_f	Fall time		-	5.4	-	ns

Table 7. Source drain diode

Symbol	Parameter	Test conditions	Min	Typ.	Max	Unit
I_{SD}	Source-drain current		-		6.5	A
$I_{SDM}^{(1)}$	Source-drain current (pulsed)		-		26	A
$V_{SD}^{(2)}$	Forward on voltage	$I_{SD} = 6.5 \text{ A}$, $V_{GS}=0$	-		1.3	V
t_{rr}	Reverse recovery time	$I_{SD} = 6.5 \text{ A}$, $di/dt = 100 \text{ A}/\mu\text{s}$, $V_{DD}=48 \text{ V}$, $T_j=150 \text{ }^\circ\text{C}$	-	24	-	ns
Q_{rr}	Reverse recovery charge		-	23.3	-	nC
I_{RRM}	Reverse recovery current		-	1.94	-	A

1. Pulse width limited by safe operating area
2. Pulsed: pulse duration= 300 μs , duty cycle 1.5%

2.1 Electrical characteristics (curves)

Figure 2. Safe operating area

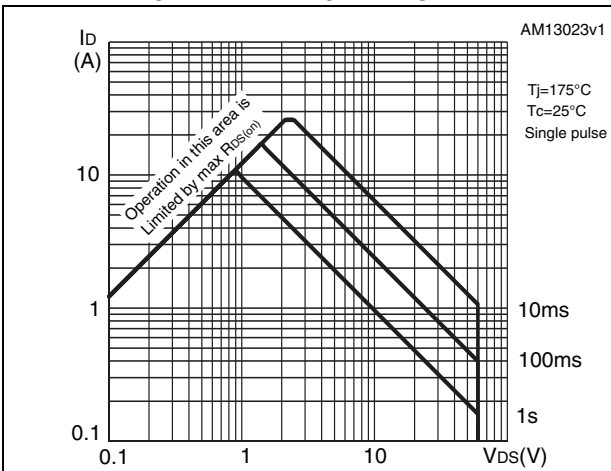


Figure 3. Thermal impedance

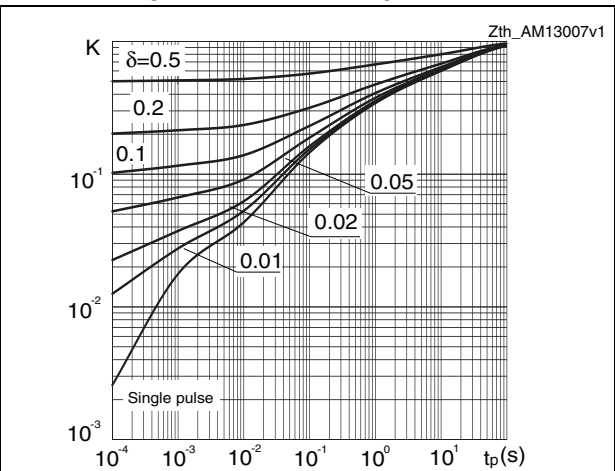


Figure 4. Output characteristics

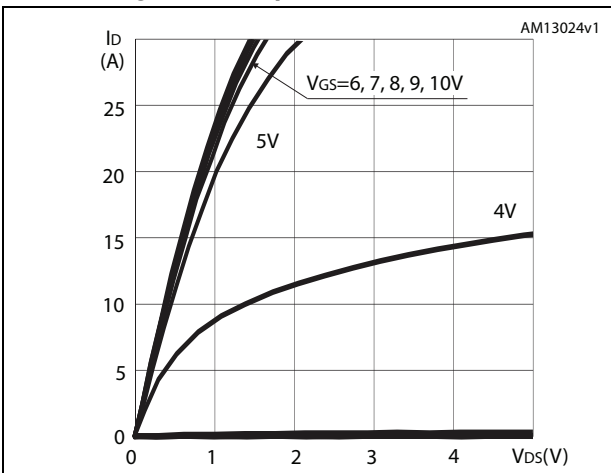


Figure 5. Transfer characteristics

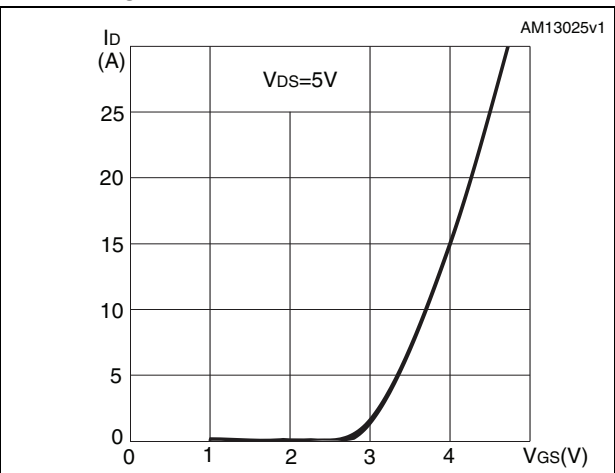


Figure 6. Normalized $V_{(BR)DSS}$ vs temperature

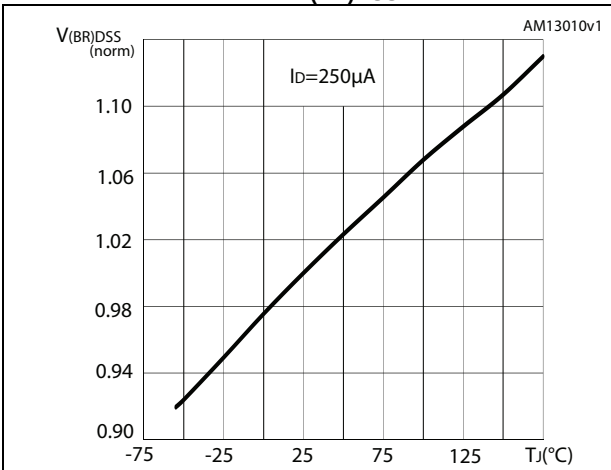


Figure 7. Static drain-source on-resistance

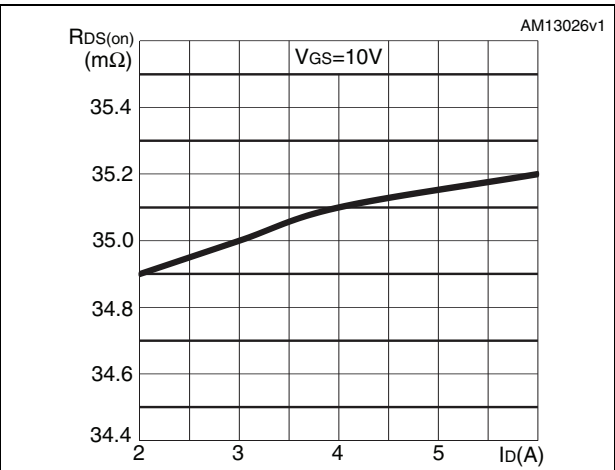


Figure 8. Gate charge vs gate-source voltage

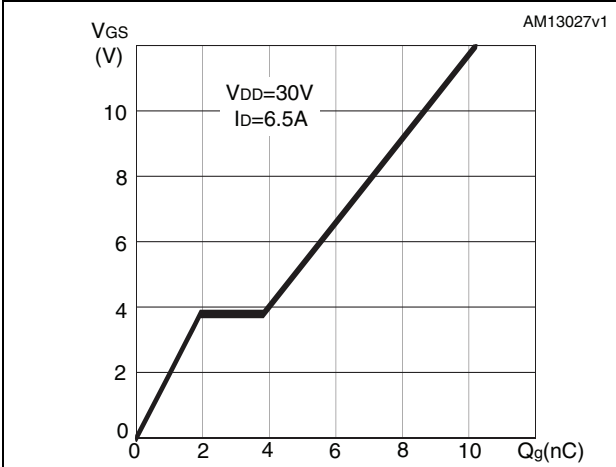


Figure 9. Capacitance variations

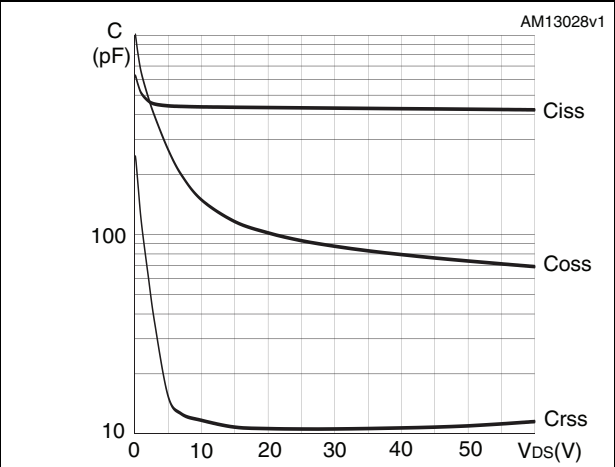


Figure 10. Normalized gate threshold voltage vs temperature


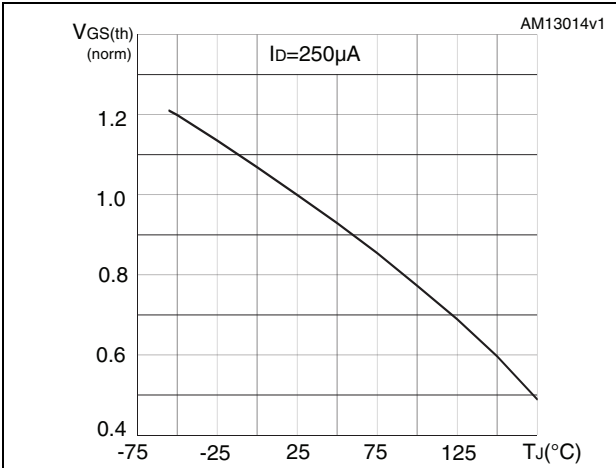



Figure 11. Normalized on-resistance vs temperature

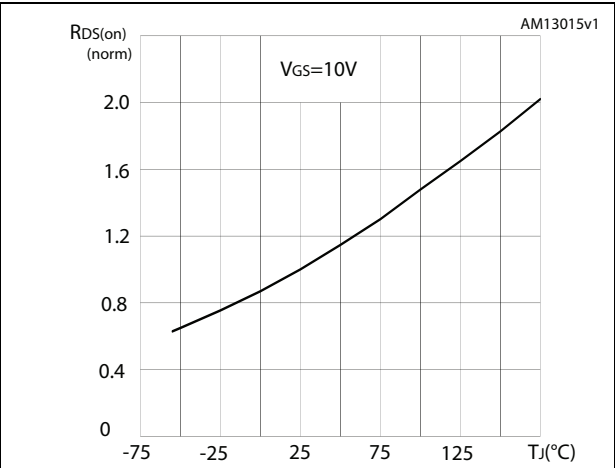

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

Figure 18. PowerFLAT 5x6 double island type R outline

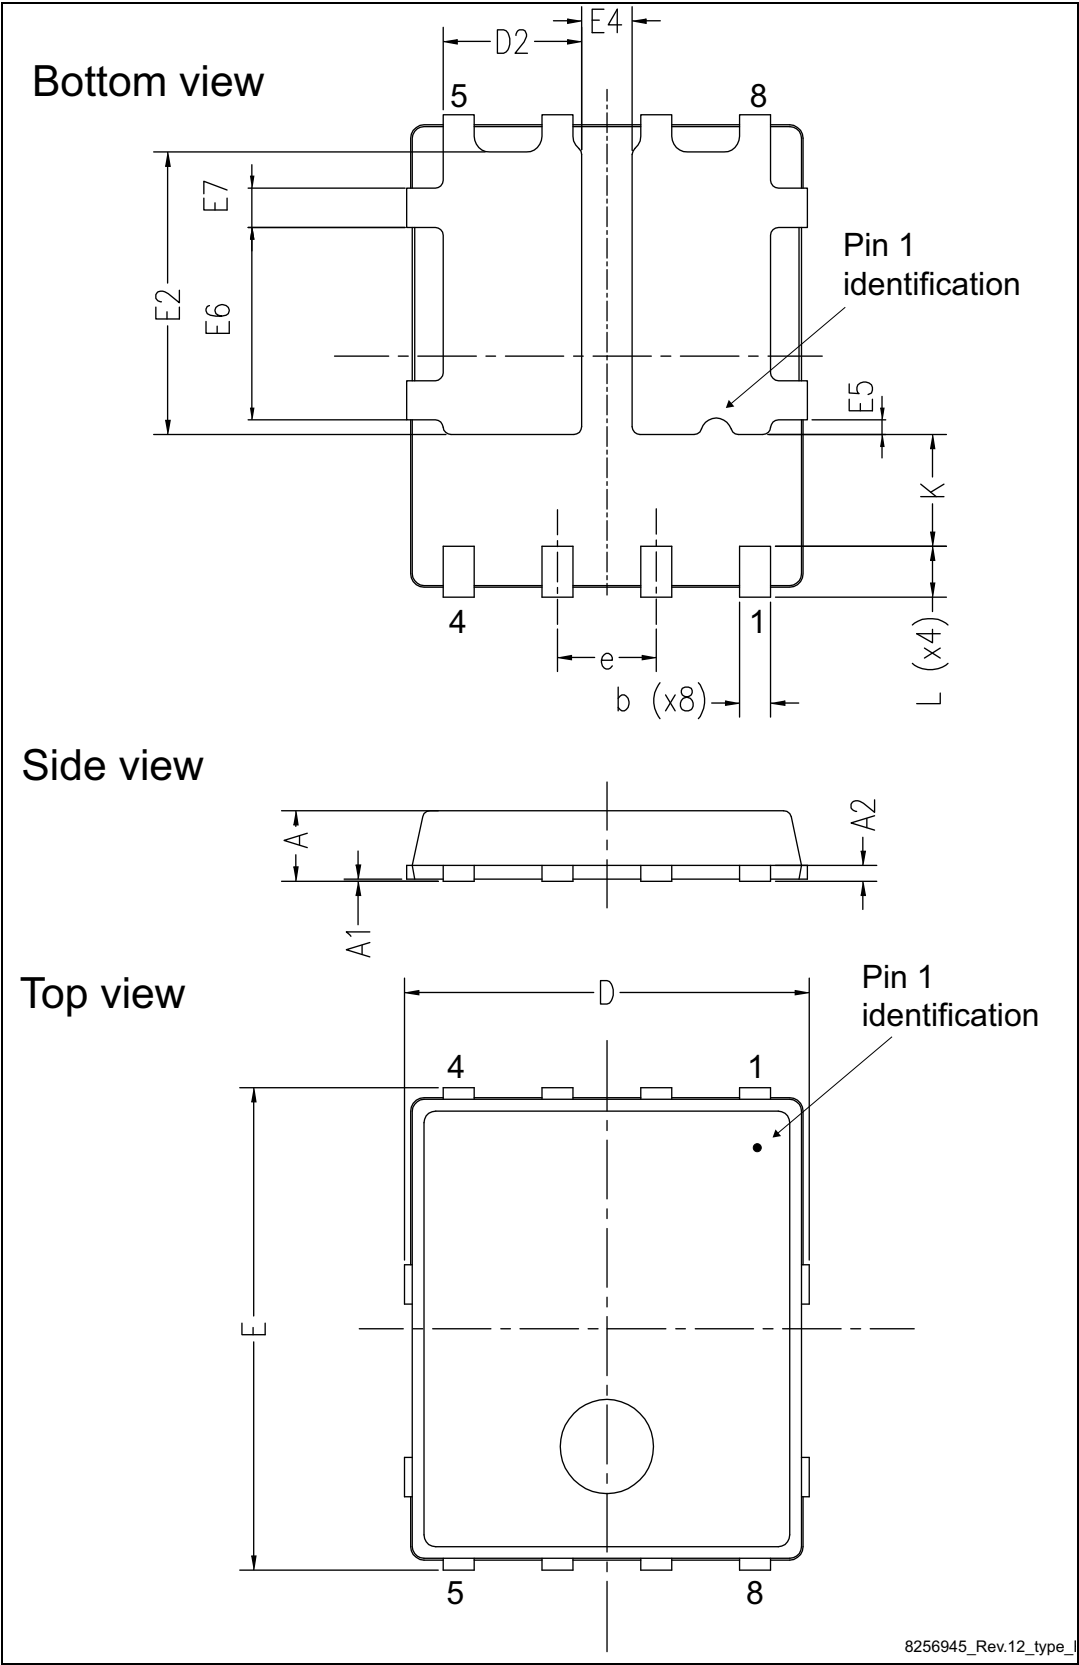

8256945_Rev.12_type_I

Table 8. PowerFLAT 5x6 double island type R mechanical data

Ref.	Dimensions (mm)		
	Min.	Typ.	Max.
A	0.80		1.00
A1	0.02		0.05
A2		0.25	
b	0.30		0.50
D	5.00	5.20	5.40
D2	1.68		1.88
E	5.95	6.15	6.35
E2	3.50		3.70
E4	0.55		0.75
E5	0.08		0.28
E6	2.35		2.55
E7	0.40		0.60
e		1.27	
L	0.60		0.80
K	1.275		1.575

Figure 19. PowerFLAT 5x6 double island WF type R outline


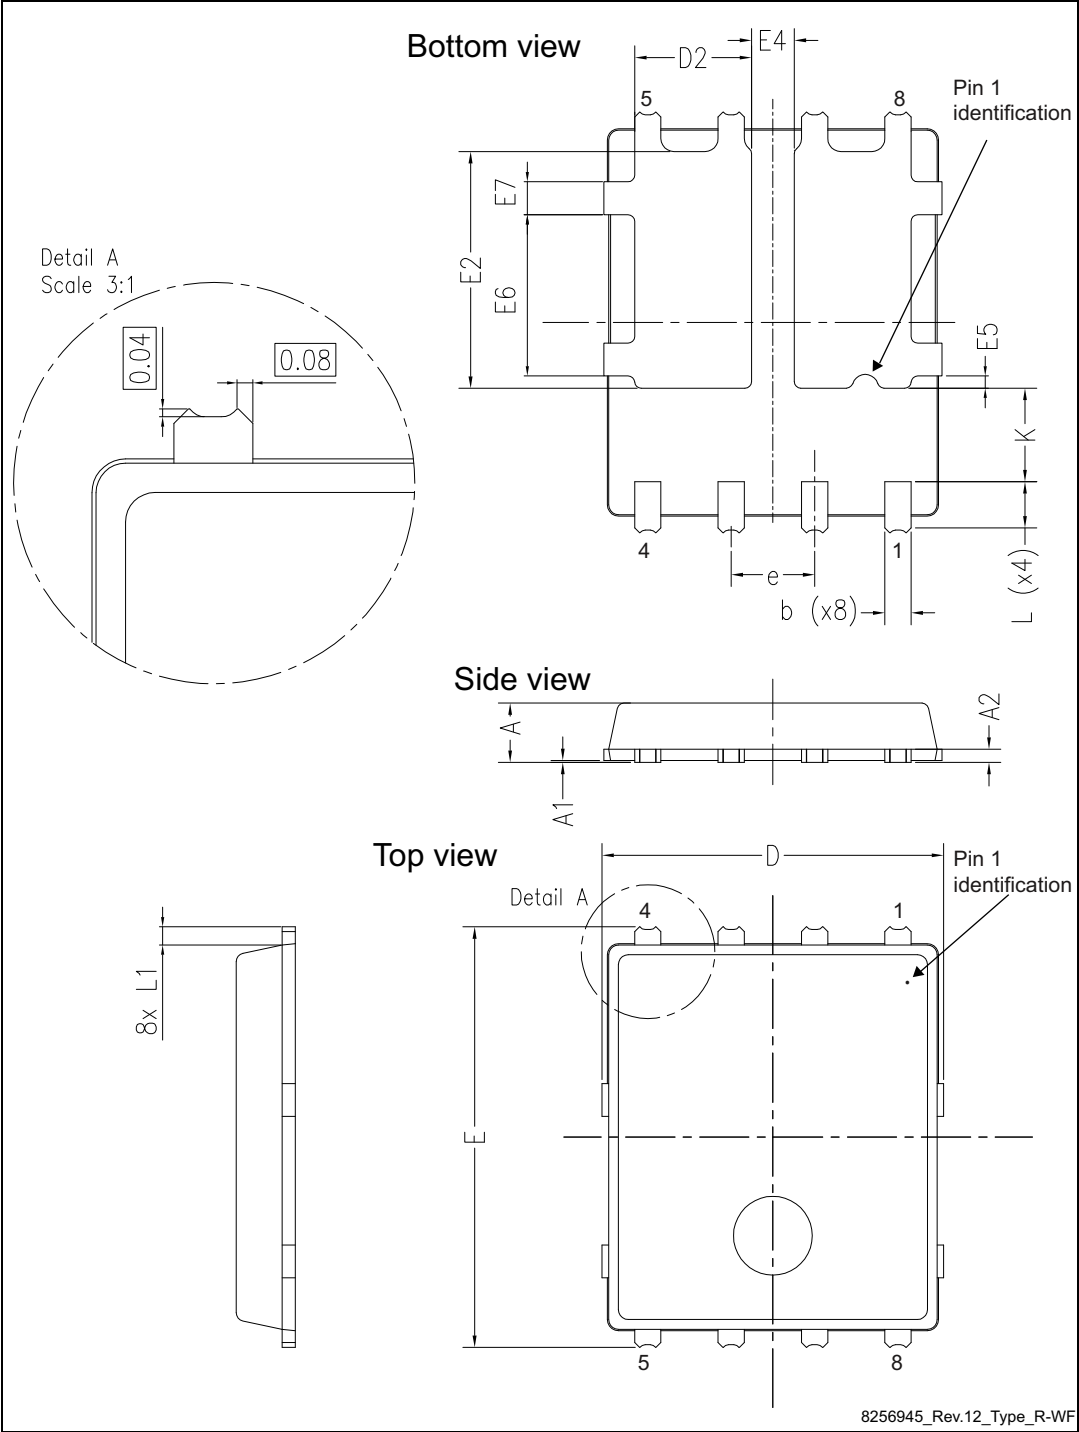


Table 9. PowerFLAT 5x6 double island WF type R mechanical data

Ref.	Dimensions (mm)		
	Min.	Typ.	Max.
A	0.80		1.00
A1	0.02		0.05
A2		0.25	
b	0.30		0.50
D	5.00	5.20	5.40
D2	1.68		1.88
E	6.20	6.40	6.60
E2	3.50		3.70
E4	0.55		0.75
E5	0.08		0.28
E6	2.35		2.55
E7	0.40		0.60
e		1.27	
L	0.70		0.90
L1		0.275	
K	1.275		1.575

Figure 20. PowerFLAT 5x6 double island recommended footprint (dimensions are in mm)

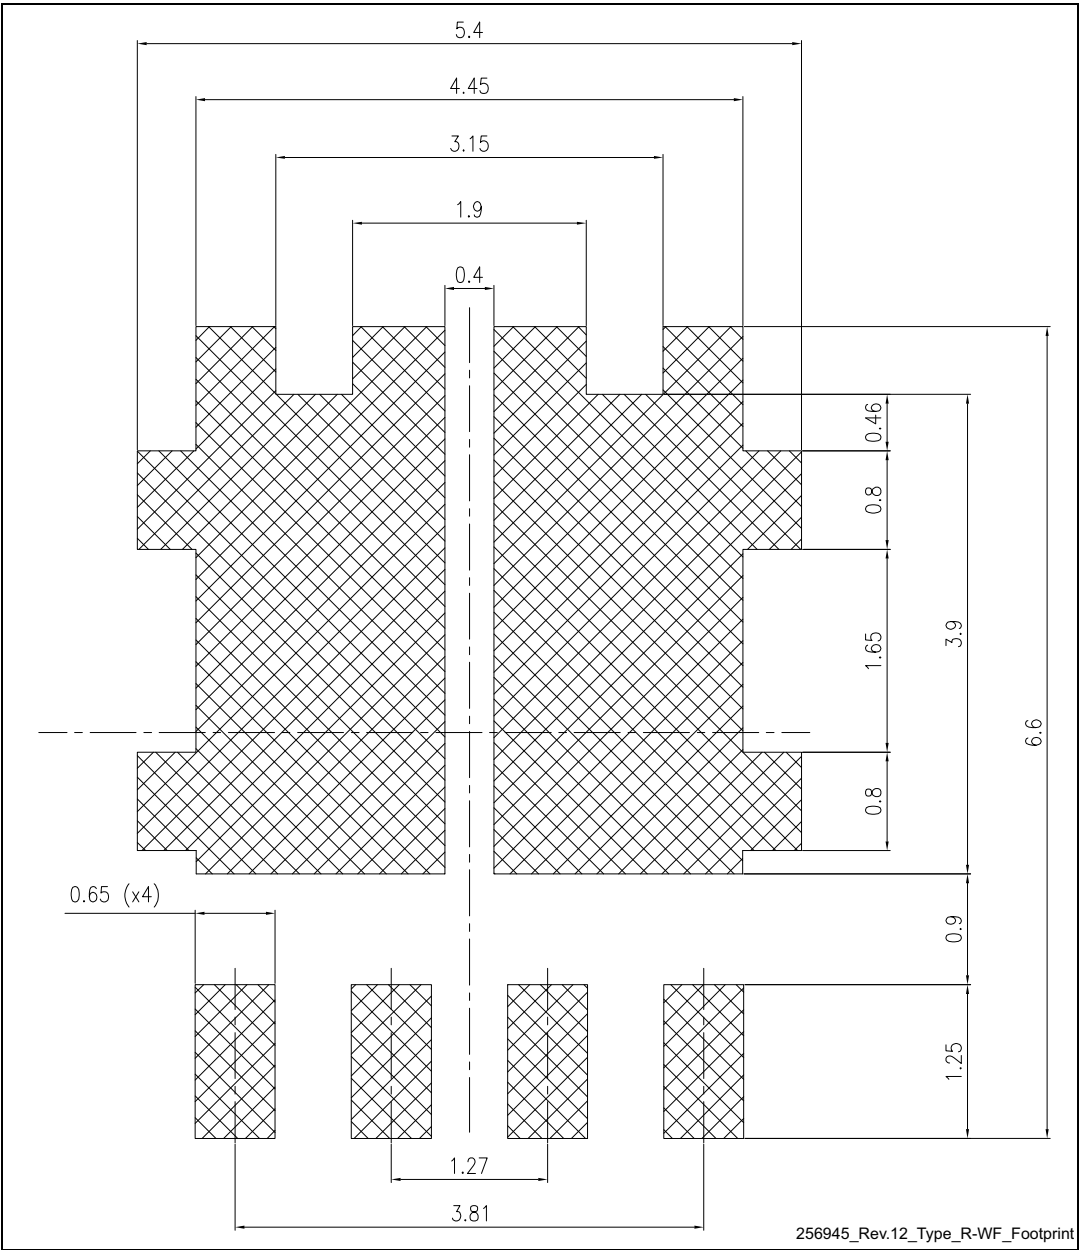

5 Packaging information

Figure 21. PowerFLAT™ 5x6 tape^(a)


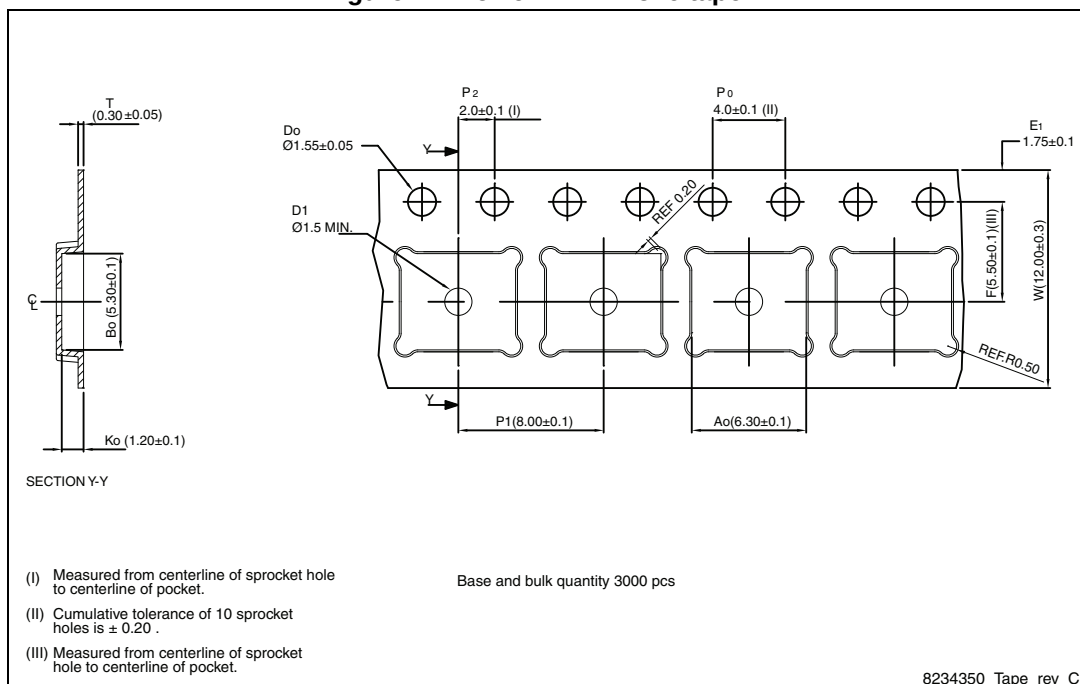


Figure 22. PowerFLAT 5x6 WF tape^(a)

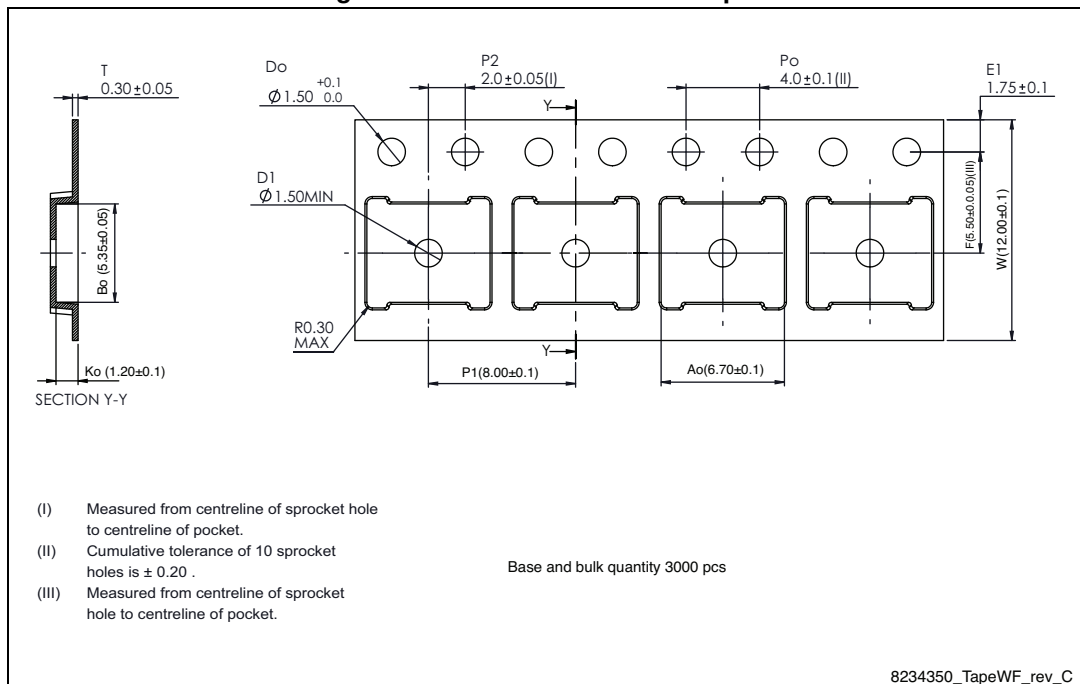

a. All dimensions are in millimeters.

Pin 1 identification

The diagram shows a 4-pin connector with four pins labeled ST. An arrow points to the top-left pin, which is labeled 'Pin 1 identification'.

Technical drawing of a 35mm film reel, showing dimensions in millimeters.

Top View (Left): Shows the reel's profile with a central hub and six sprocket holes. Key dimensions include:

- Hub outer radius: R25.00
- Hub inner radius: 4.00
- Hub thickness: 2.50
- Reel outer radius: R10.60
- Reel thickness: 1.90
- Reel inner radius: 2.50
- Reel width: W3 11.9/15.4
- Reel height: W2 18.4 (max)
- Reel width: W1 12.4 (+2/-0)
- Reel height: W4 17.8 (+2/-0)
- Reel width: W5 12.4 (+2/-0)
- Reel height: W6 17.8 (+2/-0)
- Reel width: W7 12.4 (+2/-0)
- Reel height: W8 17.8 (+2/-0)
- Reel width: W9 12.4 (+2/-0)
- Reel height: W10 17.8 (+2/-0)
- Reel width: W11 12.4 (+2/-0)
- Reel height: W12 17.8 (+2/-0)
- Reel width: W13 12.4 (+2/-0)
- Reel height: W14 17.8 (+2/-0)
- Reel width: W15 12.4 (+2/-0)
- Reel height: W16 17.8 (+2/-0)
- Reel width: W17 12.4 (+2/-0)
- Reel height: W18 17.8 (+2/-0)
- Reel width: W19 12.4 (+2/-0)
- Reel height: W20 17.8 (+2/-0)
- Reel width: W21 12.4 (+2/-0)
- Reel height: W22 17.8 (+2/-0)
- Reel width: W23 12.4 (+2/-0)
- Reel height: W24 17.8 (+2/-0)
- Reel width: W25 12.4 (+2/-0)
- Reel height: W26 17.8 (+2/-0)
- Reel width: W27 12.4 (+2/-0)
- Reel height: W28 17.8 (+2/-0)
- Reel width: W29 12.4 (+2/-0)
- Reel height: W30 17.8 (+2/-0)
- Reel width: W31 12.4 (+2/-0)
- Reel height: W32 17.8 (+2/-0)
- Reel width: W33 12.4 (+2/-0)
- Reel height: W34 17.8 (+2/-0)
- Reel width: W35 12.4 (+2/-0)
- Reel height: W36 17.8 (+2/-0)
- Reel width: W37 12.4 (+2/-0)
- Reel height: W38 17.8 (+2/-0)
- Reel width: W39 12.4 (+2/-0)
- Reel height: W40 17.8 (+2/-0)
- Reel width: W41 12.4 (+2/-0)
- Reel height: W42 17.8 (+2/-0)
- Reel width: W43 12.4 (+2/-0)
- Reel height: W44 17.8 (+2/-0)
- Reel width: W45 12.4 (+2/-0)
- Reel height: W46 17.8 (+2/-0)
- Reel width: W47 12.4 (+2/-0)
- Reel height: W48 17.8 (+2/-0)
- Reel width: W49 12.4 (+2/-0)
- Reel height: W50 17.8 (+2/-0)
- Reel width: W51 12.4 (+2/-0)
- Reel height: W52 17.8 (+2/-0)
- Reel width: W53 12.4 (+2/-0)
- Reel height: W54 17.8 (+2/-0)
- Reel width: W55 12.4 (+2/-0)
- Reel height: W56 17.8 (+2/-0)
- Reel width: W57 12.4 (+2/-0)
- Reel height: W58 17.8 (+2/-0)
- Reel width: W59 12.4 (+2/-0)
- Reel height: W60 17.8 (+2/-0)
- Reel width: W61 12.4 (+2/-0)
- Reel height: W62 17.8 (+2/-0)
- Reel width: W63 12.4 (+2/-0)
- Reel height: W64 17.8 (+2/-0)
- Reel width: W65 12.4 (+2/-0)
- Reel height: W66 17.8 (+2/-0)
- Reel width: W67 12.4 (+2/-0)
- Reel height: W68 17.8 (+2/-0)
- Reel width: W69 12.4 (+2/-0)
- Reel height: W70 17.8 (+2/-0)
- Reel width: W71 12.4 (+2/-0)
- Reel height: W72 17.8 (+2/-0)
- Reel width: W73 12.4 (+2/-0)
- Reel height: W74 17.8 (+2/-0)
- Reel width: W75 12.4 (+2/-0)
- Reel height: W76 17.8 (+2/-0)
- Reel width: W77 12.4 (+2/-0)
- Reel height: W78 17.8 (+2/-0)
- Reel width: W79 12.4 (+2/-0)
- Reel height: W80 17.8 (+2/-0)
- Reel width: W81 12.4 (+2/-0)
- Reel height: W82 17.8 (+2/-0)
- Reel width: W83 12.4 (+2/-0)
- Reel height: W84 17.8 (+2/-0)
- Reel width: W85 12.4 (+2/-0)
- Reel height: W86 17.8 (+2/-0)
- Reel width: W87 12.4 (+2/-0)
- Reel height: W88 17.8 (+2/-0)
- Reel width: W89 12.4 (+2/-0)
- Reel height: W90 17.8 (+2/-0)
- Reel width: W91 12.4 (+2/-0)
- Reel height: W92 17.8 (+2/-0)
- Reel width: W93 12.4 (+2/-0)
- Reel height: W94 17.8 (+2/-0)
- Reel width: W95 12.4 (+2/-0)
- Reel height: W96 17.8 (+2/-0)
- Reel width: W97 12.4 (+2/-0)
- Reel height: W98 17.8 (+2/-0)
- Reel width: W99 12.4 (+2/-0)
- Reel height: W100 17.8 (+2/-0)
- Reel width: W101 12.4 (+2/-0)
- Reel height: W102 17.8 (+2/-0)
- Reel width: W103 12.4 (+2/-0)
- Reel height: W104 17.8 (+2/-0)
- Reel width: W105 12.4 (+2/-0)
- Reel height: W106 17.8 (+2/-0)
- Reel width: W107 12.4 (+2/-0)
- Reel height: W108 17.8 (+2/-0)
- Reel width: W109 12.4 (+2/-0)
- Reel height: W110 17.8 (+2/-0)
- Reel width: W111 12.4 (+2/-0)
- Reel height: W112 17.8 (+2/-0)
- Reel width: W113 12.4 (+2/-0)
- Reel height: W114 17.8 (+2/-0)
- Reel width: W115 12.4 (+2/-0)
- Reel height: W116 17.8 (+2/-0)
- Reel width: W117 12.4 (+2/-0)
- Reel height: W118 17.8 (+2/-0)
- Reel width: W119 12.4 (+2/-0)
- Reel height: W120 17.8 (+2/-0)
- Reel width: W121 12.4 (+2/-0)
- Reel height: W122 17.8 (+2/-0)
- Reel width: W123 12.4 (+2/-0)
- Reel height: W124 17.8 (+2/-0)
- Reel width: W125 12.4 (+2/-0)
- Reel height: W126 17.8 (+2/-0)
- Reel width: W127 12.4 (+2/-0)
- Reel height: W128 17.8 (+2/-0)
- Reel width: W129 12.4 (+2/-0)
- Reel height: W130 17.8 (+2/-0)
- Reel width: W131 12.4 (+2/-0)
- Reel height: W132 17.8 (+2/-0)
- Reel width: W133 12.4 (+2/-0)
- Reel height: W134 17.8 (+2/-0)
- Reel width: W135 12.4 (+2/-0)
- Reel height: W136 17.8 (+2/-0)
- Reel width: W137 12.4 (+2/-0)
- Reel height: W138 17.8 (+2/-0)
- Reel width: W139 12.4 (+2/-0)
- Reel height: W140 17.8 (+2/-0)
- Reel width: W141 12.4 (+2/-0)
- Reel height: W142 17.8 (+2/-0)
- Reel width: W143 12.4 (+2/-0)
- Reel height: W144 17.8 (+2/-0)
- Reel width: W145 12.4 (+2/-0)
- Reel height: W146 17.8 (+2/-0)
- Reel width: W147 12.4 (+2/-0)
- Reel height: W148 17.8 (+2/-0)
- Reel width: W149 12.4 (+2/-0)
- Reel height: W150 17.8 (+2/-0)
- Reel width: W151 12.4 (+2/-0)
- Reel height: W152 17.8 (+2/-0)
- Reel width: W153 12.4 (+2/-0)
- Reel height: W154 17.8 (+2/-0)
- Reel width: W155 12.4 (+2/-0)
- Reel height: W156 17.8 (+2/-0)
- Reel width: W157 12.4 (+2/-0)
- Reel height: W158 17.8 (+2/-0)
- Reel width: W159 12.4 (+2/-0)
- Reel height: W160 17.8 (+2/-0)
- Reel width: W161 12.4 (+2/-0)
- Reel height: W162 17.8 (+2/-0)
- Reel width: W163 12.4 (+2/-0)
- Reel height: W164 17.8 (+2/-0)
- Reel width: W165 12.4 (+2/-0)
- Reel height: W166 17.8 (+2/-0)
- Reel width: W167 12.4 (+2/-0)
- Reel height: W168 17.8 (+2/-0)
- Reel width: W169 12.4 (+2/-0)
- Reel height: W170 17.8 (+2/-0)
- Reel width: W171 12.4 (+2/-0)
- Reel height: W172 17.8 (+2/-0)
- Reel width: W173 12.4 (+2/-0)
- Reel height: W174 17.8 (+2/-0)
- Reel width: W175 12.4 (+2/-0)

6 Revision history

Table 10. Document revision history

Date	Revision	Changes
28-Mar-2012	1	First release.
19-Jun-2012	2	Section 2.1: Electrical characteristics (curves) has been added. Updated Section 4: Package information and tile on the coverpage.
26-Jun-2012	3	Document status promoted from preliminary to production data.
23-Feb-2015	4	Updated title, features and description in cover page. Updated Table 5: Dynamic , Table 6: Switching times and Section 2.1: Electrical characteristics (curves) . Updated Section 4: Package information . Added Section 5: Packaging information . Minor text changes.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved