


LCR-09

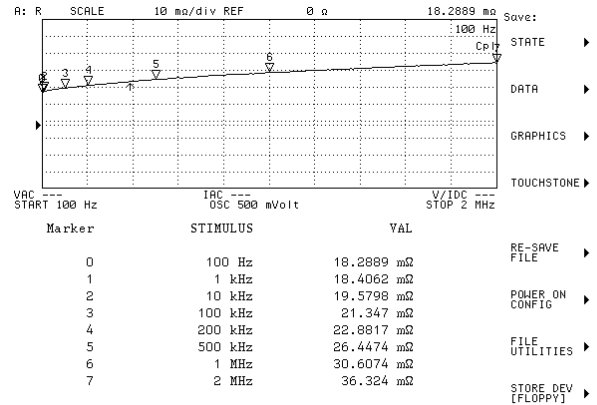

SMD / chip test fixture

Marker	STIMULUS	VAL	RE-SAVE FILE	POWER ON CONFIG	FILE UTILITIES	STORE DEV FILE
0	100 Hz	-1.82472 uH				
1	1 kHz	-1.65736 uH				
2	10 kHz	16.2763 nH				
3	100 kHz	30.994 nH				
4	200 kHz	29.4413 nH				
5	500 kHz	27.8961 nH				
6	1 MHz	27.0751 nH				
7	2 MHz	26.4539 nH				

R: Cs SCALE 1 pF/div REF 0 F 526.238 fF

Save:
STATE
DATA
GRAPHICS
TOUCHSTONE

VAC --- START 100 Hz IAC --- OSC 500 mVolt V/IDC --- STOP 2 MHz

Marker	STIMULUS	VAL
0	100 Hz	526.238 fF
1	1 kHz	480.978 fF
2	10 kHz	28.3819 fF
3	100 kHz	23.3637 fF
4	200 kHz	23.2812 fF
5	500 kHz	23.3804 fF
6	1 MHz	23.5527 fF
7	2 MHz	23.6878 fF

RE-SAVE FILE
POWER ON CONFIG
FILE UTILITIES
STORE DEV FILE

