

-	SEE CHART	LABEL	200	EA
-	914-796	LABEL, BAR CODE	.2	EAD
-	914-020	LABEL, UPC	10	EAD
-	580293	BOX	.2	EAD
-	896-174	BOX	10	EA
-	425610	INK, WHITE	.001	FOZ
-	425717	FOIL, WHITE	8.3	FT
-	896-141-000	BOX, PLASTIC	200	EA
-	SEE CHART	FUSE	1000	EA
NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL									
A	LTR	COPIES TO		MATL SPEC	FINISH		 DES PLAINES, ILLINOIS 60016 REVISION B DRWG. NO. 0AT0000.VXGLO FINAL		
		1	9 18	DRW	JCU	DATE			
		2	10 19						
		3	12 20	CHK		DATE		SUPER DRW	
		4	13 21						
		5	14 23	APPD		DATE		RAW STK WT	LBS/M
		6	15 33						
		7	16 43						
		8	17 53						
		TITLE		SMARTGLOW ATO BLADE FUSES 3A THRU 30A : PACKAGED					

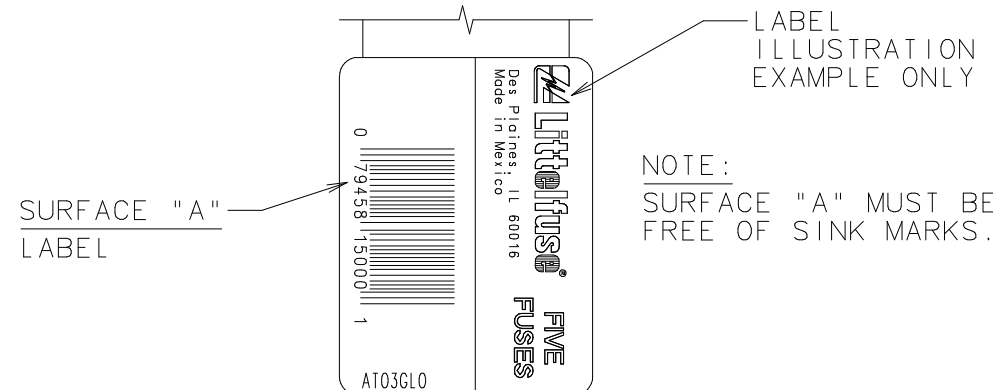


Diagram illustrating the stamping process for the ATO® 3GLO logo. The stamp is rectangular and contains the text "ATO® 3GLO". The surface of the stamp is labeled "SURFACE 'B'" and is noted to "VARIABLES (SEE CHART)". The stamp is shown at a 24 PT (point) size.

1. LABEL (SEE CHART) PLASTIC BOX 896-141-000 SURFACE "A" INK OR HOT STAMP SURFACE "B" USING INK 425610 OR FOIL 425717 AS SHOWN IN DETAIL "A".
2. PLACE FIVE (5) FUSES (SEE CHART), IN LABELED/STAMPED BOX 896-141-000.
3. PLACE 20 V-PACKS IN BOX 896-174 AND CLOSE. APPLY LABEL 914-020 PRINTED TO GENERAL LABEL SPEC. LS-000001Q. QUANTITY FIELD TO READ 20PKS/100EA
4. NOTE: IF PACKED AT LITTELFUSE USE LABEL 914-796 PRINTED TO GENERAL LABEL SPEC. LS-000003.