
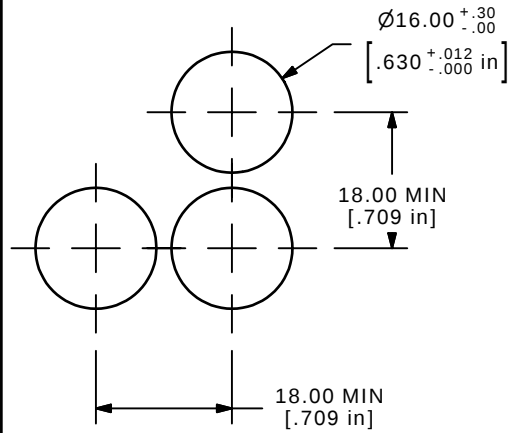

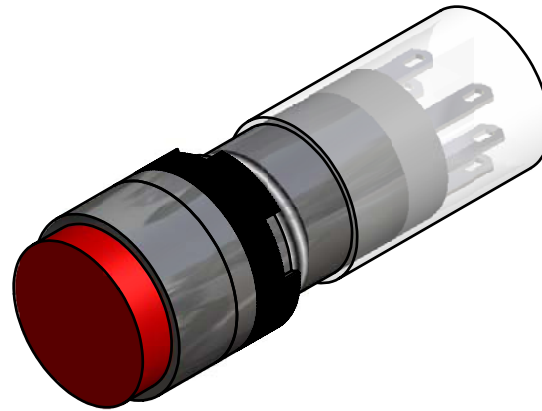


ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040014	P16OAR11
2	1	F051601	P16 PLASTIC TERMINAL PROTECTOR
3	1	F050117	ROUND FLAT RED




PANEL MOUNTING

SPDT
CONTACT CONFIGURATIONØ18.00
[.709 in]10.80
[.425 in]7.20
[.283 in]40.00
[1.575 in]


A

A

24.00
[.945 in]

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. MECHANICAL LIFE: 2,000,000 OPERATIONS
5. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
6. OPERATING TEMP.: -25°C to 70°C
- ▲ 7. LAMP VOLTAGE: NO LAMP
8. CONTACT RATING: 5A @ 250VAC
6A @ 240VAC
9. ▲ DENOTES CRITICAL PARAMETER.

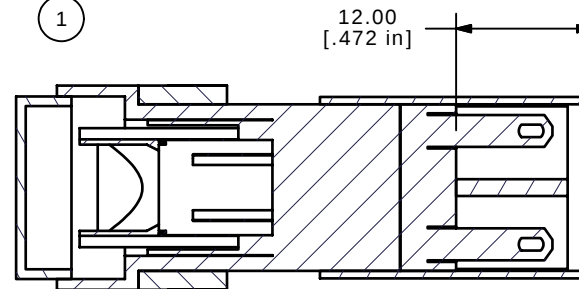SECTION A-A
SCALE 1.50 : 1

B	15948	EDIT PARTS LIST	4/5/06	PH
A	15352	RELEASED FOR PRODUCTION	10/3/05	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE P16OAR110RED

SCALE
2:1DATE
10/3/2005DR
PHDWG
XF0645PREV
B