

# TIGHT STABILITY INDUSTRIAL GRADE CRYSTAL OSCILLATOR



3.2 x 2.5 x 1.2mm

## ASET SERIES



**ESD Sensitive**



**RoHS/RoHS II compliant**

**Moisture Sensitivity Level (MSL) – This product is Hermetically Sealed and not Moisture Sensitive - MSL = N/A: Not Applicable**

### FEATURES:

- Highly reliable seam-sealed package
- Low current consumption 7mA
- Low phase noise and jitter
- Industrial grade tight temperature stability available ( $\pm 10\text{ppm} / -40$  to  $+85^\circ\text{C}$ )
- Fast start-up time 0.2ms typical
- CMOS output with Tri-state function

### APPLICATIONS:

- Home networking by AC socket
- Wireless LAN
- Mobile communications
- PLC modem
- WiMax


### STANDARD SPECIFICATIONS:

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	4		54	MHz	
Standard Frequencies	5, 10, 12, 16, 20, 24, 26, 27, 32, 40, 44			MHz	
Operating Temperature	-40		+85	$^\circ\text{C}$	
Storage Temperature	-40		+85	$^\circ\text{C}$	
Overall Frequency Stability*	-15		+15	ppm	See options
Supply Voltage (Vdd)	+2.7	3.0	+3.3	V	See options
Supply Current (Idd)			7.0	mA	
Stand-by Current			10	$\mu\text{A}$	
Symmetry	45		55	%	@ 1/2Vdd
Rise and Fall Time (Tr/Tf)			5.0	ns	10%Vdd-90%Vdd
Output Load			15	pF	CMOS
Output Voltage (VOH)	0.9* Vdd			V	
Output Voltage (VOL)			0.1* Vdd		
Start-up Time		0.2	3.0	ms	
RMS Jitter		3.0		ps	
Tri-state function	"1" ( $V_{IH} \geq 0.7 * V_{dd}$ ) or Open: Oscillation "0" ( $V_{IH} < 0.3 * V_{dd}$ ): Hi Z				
Phase Noise (@10kHz offset)		-143		dBc/Hz	
Aging@+25 $^\circ\text{C}$	-2		+2	ppm	First year
	-7		+7		10 years

\* Overall frequency stability includes initial tolerance @ +25 $^\circ\text{C}$ , and temperature stability

### OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

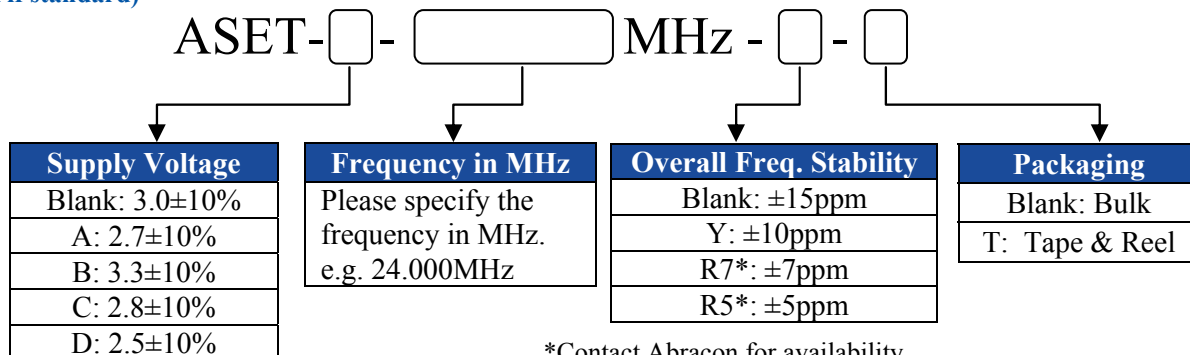

\*Contact Abracon for availability

ABRACON IS  
ISO 9001:2008  
CERTIFIED



**ABRACON**  
CORPORATION

2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 12.09.14**

Ph. 949.546.8000 | Fax. 949.546.8001

Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# TIGHT STABILITY INDUSTRIAL GRADE CRYSTAL OSCILLATOR



ASET


3.2 x 2.5 x 1.2mm

ASET SERIES




RoHS/RoHS II compliant

## OUTLINE DRAWING:

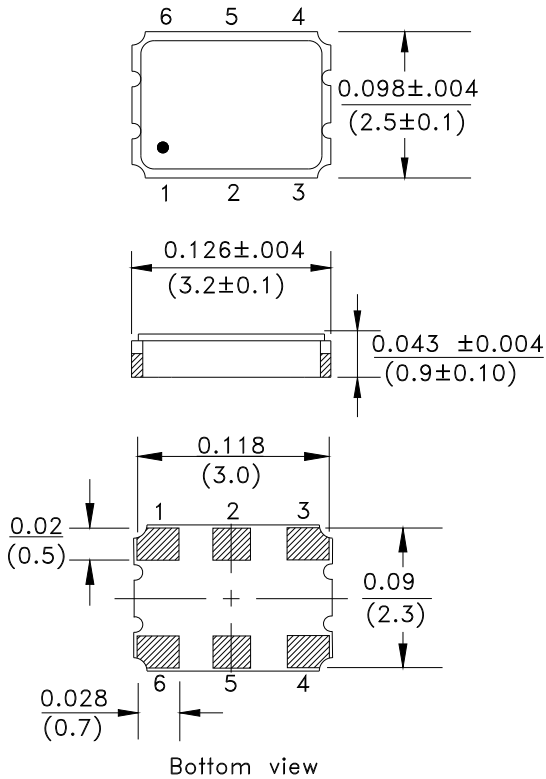

Recommended land pattern

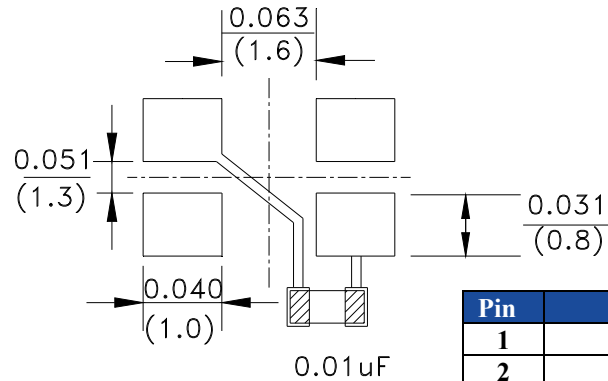


Pin	Function
1	OE
2	NC
3	GND
4	Output
5	NC
6	Vdd

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 3 and 6.


Dimensions: Inches (mm)

## TAPE & REEL: T= tape and reel (1,000 pcs/reel)

Dimensions: mm

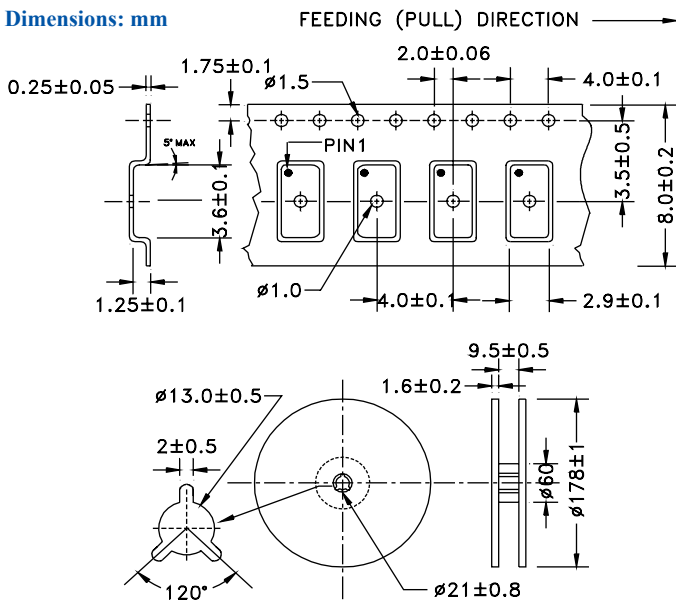

## REFLOW PROFILE

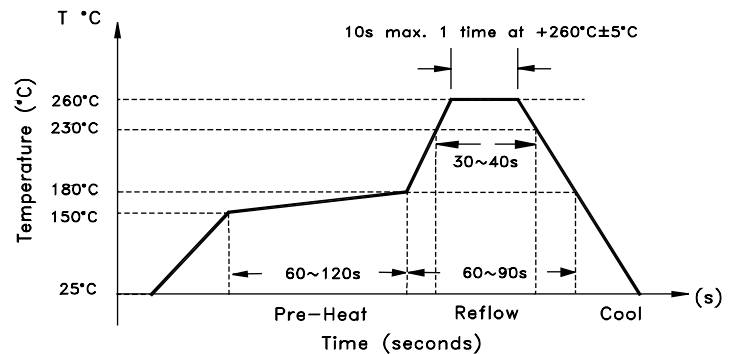

Need a test socket for the ASET Series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, [click here](#). P/N: **AXS-3225-04-05**

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO 9001 :2008  
CERTIFIED



2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 12.09.14**

Ph. 949.546.8000 | Fax. 949.546.8001

Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale