

尺寸	公差	材料	数量	备注
1	±0.1	ABS UL 94V-0	1	






P	Tol. SPECIFIED
DIMENSION RANGE	Tol. ±
X < 1	0.15
1 < X < 8	0.20
8 < X < 18	0.30
18 < X < 50	0.50
50 < X < 120	0.70
120 < X < 250	0.90
250 < X < 500	1.00

TABLE C	
Code	Color
01	Black
04	Yellow
08	Yellow(PMS 1225C)
10	Pink
31	Orange
34	Purple


Material
ABS UL 94V-0

HISTORY X COUNT	DATE	ECN NO.	REV.	REVISION	SIGN.
1	04/09/07	N074004	1.1	Add new product	劉建

10	SPRING	1	SWPA		
9	IRON SHELL COVER	1	BRASS	BRIGHT-Sn	
8	NO:2 PIN	1	BRASS	Sn-Cu	
7	NO:1 PIN	1	BRASS	NI	
6	IRON SHELL	1	SPCC	NI	
5	AXIS WASHER	1	ABS UL 94HB	SEE TABLE C	
4	IC	1			TRANSMITTER
3	COVER	1	NYLON UL 94HB	SEE TABLE B	
2	INNER COVER		NYLON UL 94HB	SEE TABLE B	
1	BODY	1	SEE TABLE A	BLACK	
NO. NAME		RART NO.	Q'TY Material	COLOR / PLATING	REMARK

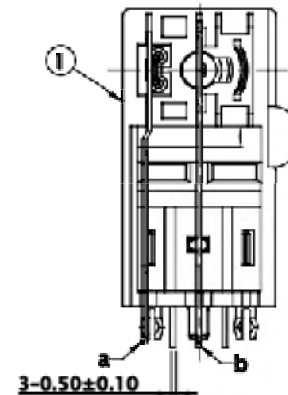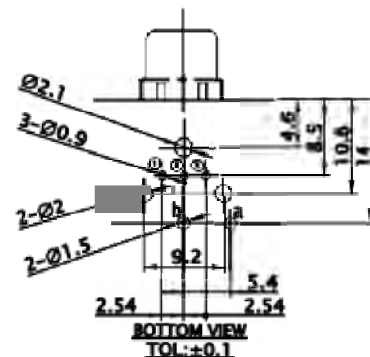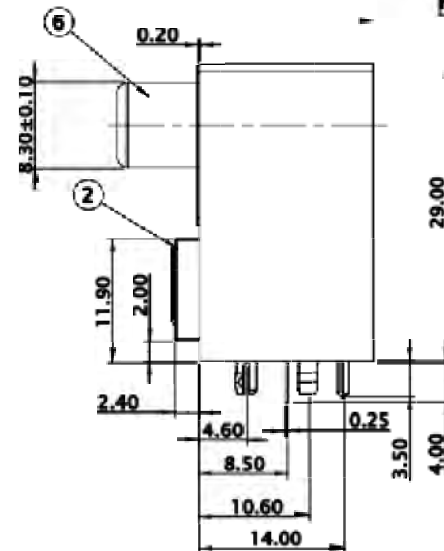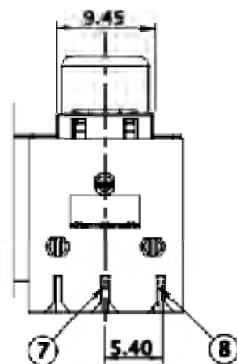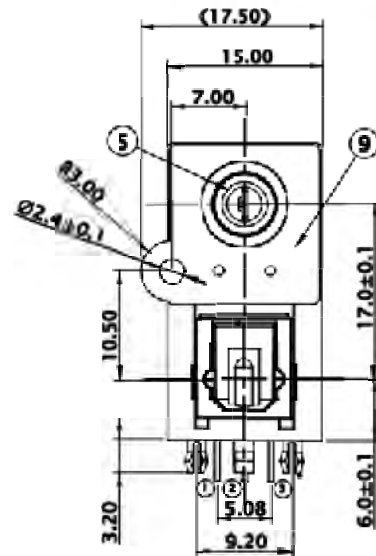

Transmitter	
Vin	①
Vcc	②
GND	③

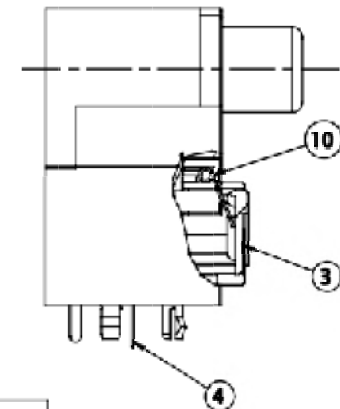

RCA PIN JACK	
a	GND
b	Vin For JACK

NOTICE	ANGLE TOL	±2°	2.000	RoHS Complied	SIZE A3
	TOLERANCE	mm		SPECIFICATION	
	ANGLE		92.05.29	OPTICAL/RCA JACK	1.1
	DESIGNED	CHECKED	APPROVED	CLIFF FC684206T	


SPECIFICATION

CUSTOMER MODEL NO. / TITLE	SPECIFICATION NO.	PAGE : 1 OF 9
OPTICAL TRANSMITTER JACK	FC684206T	DATE : JUN,05,2002

OPTICAL CONNECTOR

1. Features

- (1) Uni-directional data transmission using plastic fiber.
- (2) Signal transmission speed: MAX. 12.5Mbps
- (3) Low voltage drive
Operating voltage: 2.75 to 5.25V
- (4) Minimum input optical power: MIN. -21dBm (EIAJ)
- (5) TTL and high speed C-MOS LOGIC IC compatible.

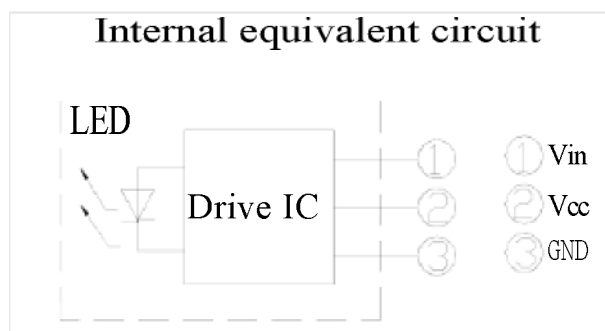

2. Applications

- (1) CD players
- (2) MD players
- (3) DVD players

3. Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply voltage	Vcc	-0.5 to +7.0	V
Input voltage	Vin	-0.5 to Vcc +0.5	V
Operating temperature	Topr	-20 to +70	°C
Storage temperature	Tstg	-30 to +80	°C
*Soldering temperature	Tsol	260	°C

* For 5s (2 times or less)

				A	趙	C	許	C	陳	W	胡
				P	91. 6. 5	H	91. 6. 5	H	91. 6. 5	R	91. 6. 5
				V	國勝	K	石坪	K	蔡鴻	T	文真
REV.	NAME	DATE	REMARK	D		D		D		N	

SPECIFICATION

CUSTOMER MODEL NO. / TITLE	SPECIFICATION NO.	PAGE : 2 OF 9
OPTICAL TRANSMITTER JACK	FC684206T	DATE :

JUN,05,2002

4. Recommended Operating Conditions

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Operating supply voltage	Vcc	2.75	3.0	5.25	V
Operating transfer rate	T	-	-	12.5	V

Mbps

5. Electro-optical Characteristics

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit.
Peak emission wavelength	λ_p		630	660	690	nm
Optical power output coupling with fiber	Pc	Refer to Fig.1	-21	-18		
Dissipation current	Icc	Refer to Fig.2	-	8	-15	dBm
High level input voltage	V _{iH}	Refer to Fig.2	2.1	-	13	V
Low level input voltage	V _{iL}	Refer to Fig.2	-	-	-	V
Low → High delay time	t _{pLH}	Refer to Fig.3	-	-	0.8	ns
High → Low delay time	t _{pHL}	Refer to Fig.3	-	-	180	ns
Pulse width distortion	Δtw	Refer to Fig.3	-15	-	180	ns
Jitter	Δt_j	Refer to Fig.3	-	1	+15	ns

15

6. Mechanical Characteristics

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
6.1 Insertion force.					
Withdrawal force.	-	4	-	40	N

6.2 Repeated operation

Inserting and withdrawing shall be made at a speed of 20 times or less/min using mating plug.
500 times.

				A	趙	C	許	C	陳	W	胡
				P	91.6.5	H	91.6.5	H	91.6.5	R	91.6.5
				V	國勝	K	石坪	K	榮鴻	T	文真
REV.	NAME	DATE	REMARK	D		D		D		N	


SPECIFICATION

CUSTOMER MODEL NO. / TITLE
OPTICAL TRANSMITTER JACK

SPECIFICATION NO.
FC684206T


PAGE : 3 OF 9
DATE : JUN,05,2002

Fig.1 Measuring Method of Optical Output Coupling with Fiber.

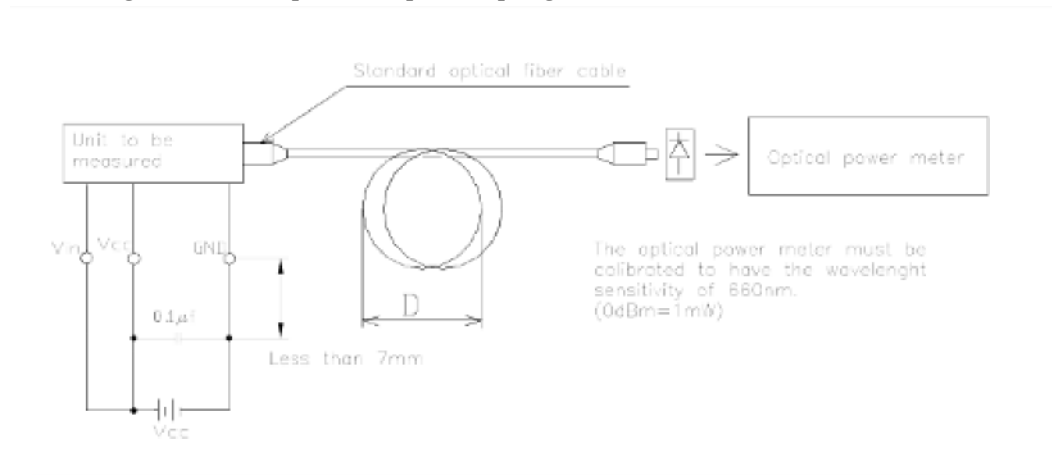

- Notes: (1) OC-08 Vcc=3.0V (State of operating).
(2) To bundle up the standard fiber optic cable, make it into a loop with the diameter D=10cm or more. (The standard fiber optic cable will be specified elsewhere.)

Fig.2 Measuring Method of Input Voltage and Supply Current.

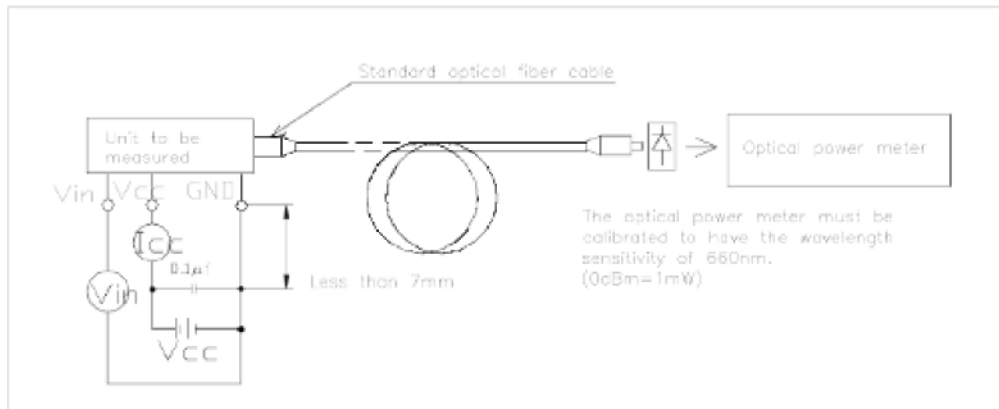

Input conditions and judgement method.

Condition	Judgement method
$V_{in}=2.1V$ or more.	$-21 \leq P_c \leq -15dBm$, $I_{cc}=13mA$ or less.
$V_{in}=0.8V$ or less.	$P_c \leq -36dBm$, $I_{cc}=13mA$ or less.

Note) Vcc=3.0V (State of operating).

				A	趙	C	許	C	陳	W	胡
				P	91. 6. 5	H	91. 6. 5	H	91. 6. 5	R	91. 6. 5
				V	國勝	K	石坪	K	榮鴻	T	文真
REV.	NAME	DATE	REMARK	D		D		D		N	


SPECIFICATION

CUSTOMER MODEL NO. / TITLE
OPTICAL TRANSMITTER JACK

SPECIFICATION NO.
FC684206T

PAGE : 4 OF 9
DATE : JUN,05,2002

Fig.3 Measuring Method of Pulse Response and Jitter.

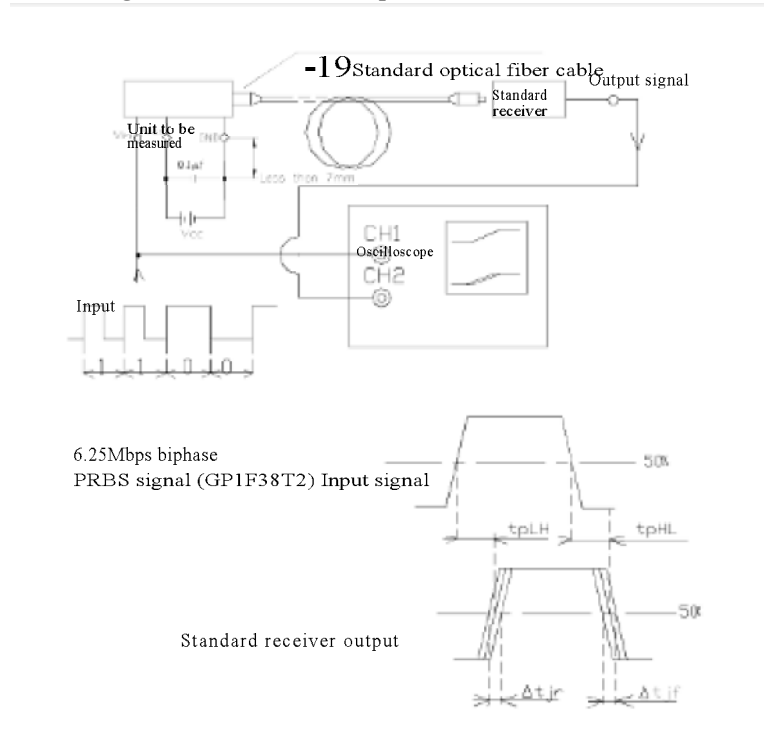

Test item	Test item Symbol	Test condition
Low → High pulse delay time	t_{pLH}	Refer to the above prescriptions
High → Low pulse delay time	t_{pHL}	Refer to the above prescriptions
Pulse width distortion Δtw	$\Delta tw = t_{pHL} - t_{pLH}$	
Low → High Jitter	Δt_{jr}	Set the trigger on the rise of input signal to measure the jitter of the rise of output
High → Low Jitter	Δt_{jf}	Set the trigger on the fall of input signal to measure the jitter of the rise of output

- Notes(1) The waveform write time shall be 4 seconds. But do not allow the waveform to be distorted by increasing the brightness too much.
 (2) $V_{cc}=3.0V$ (State of operating)
 (3) The probe for the oscilloscope must be more than $1M\Omega$ and less than $10pF$.


				A	趙	C	許	C	陳	W	胡
				P	91.6.5	H	91.6.5	H	91.6.5	R	91.6.5
				V	國勝	K	石坪	K	榮鴻	T	文真
REV.	NAME	DATE	REMARK	D		D		D		N	

SPECIFICATION

CUSTOMER MODEL NO. / TITLE	SPECIFICATION NO.	PAGE : 5 OF 9
OPTICAL TRANSMITTER JACK	FC684206T	DATE : JUN,05,2002

Mating plug

EIAJ RC-5720A Rectangular type plug (Unit mm)

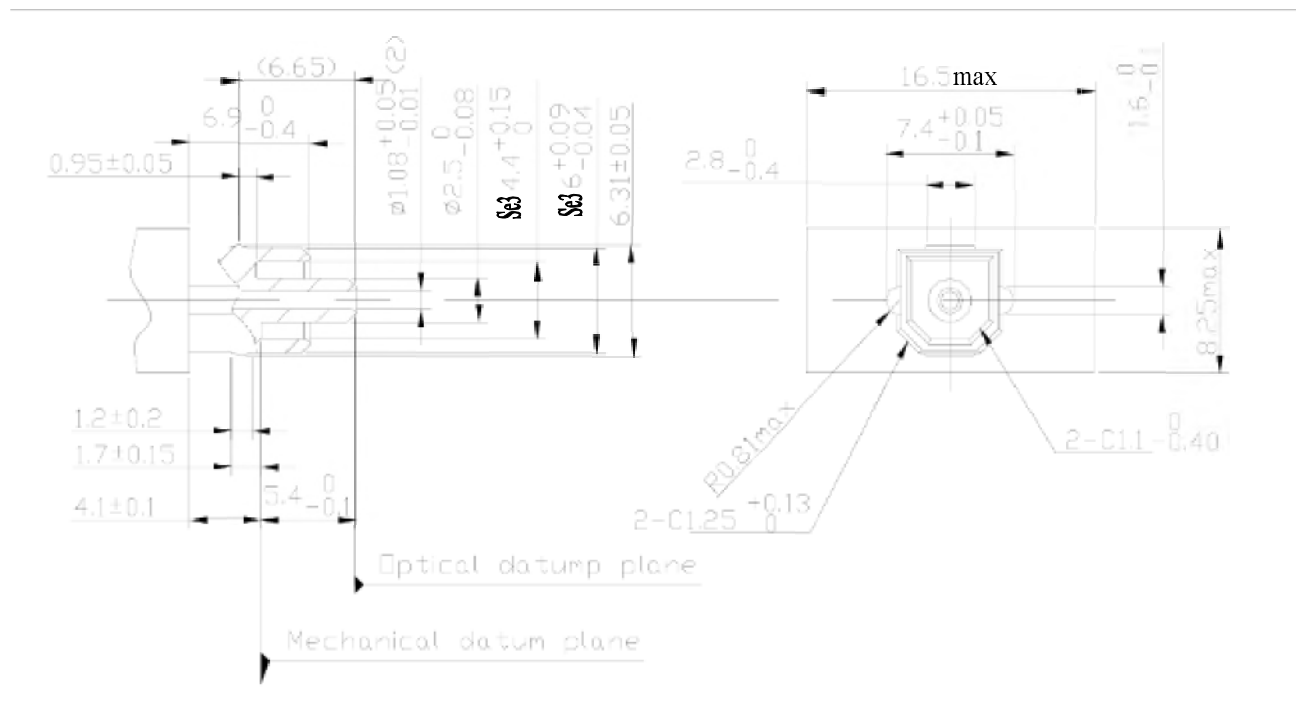

				A	趙	C	許	C	陳	W	胡
				P	91. 6. 5	H	91. 6. 5	H	91. 8. 5	R	91. 6. 5
				V	國勝	K	石坪	K	榮鴻	T	文真
REV.	NAME	DATE	REMARK	D		D		D		N	

SPECIFICATION

CUSTOMER MODEL NO. / TITLE	SPECIFICATION NO.	PAGE : 6 OF 9
OPTICAL TRANSMITTER JACK	FC684206T	DATE : JUN,05,2002

RCA

1. SCOPE

This specification covers the requirements for "PIN JACK".

2. RATED

- A) Rated voltage DC/AC 34V
- B) Rated current DC/AC 2A
- C) Temperature range -25~70°C
- D) Humidity range 85% RH MAX.
- E) Test condition

Unless otherwise specified herein, all measurements and tests shall be made at temperature of 5°C~35 °C and relative humidity of 45%~85%.

3. ELECTRICAL EFFICIENCY

Item	Condition	Result/Value
3A) Dielectric strength	500V AC applied between mutual insulated metal parts for one minute.	Not breaking insulation
3B) Insulation resistance	(500V DC applied between mutual insulated metal parts.) Initial	$\geq 100 \text{ M}\Omega$
	After heat test	$\geq 50 \text{ M}\Omega$
	After cold test	
	After resistance to soldering test	
	After life test	
3C) Contact resistance	After temperature cycling test	$\leq 30 \text{ m}\Omega$
	After humidity test	
	After heat test	
	After cold test	
	After resistance to soldering test	
	After life test	
	After temperature cycling test	

				A	趙	C	許	C	陳	W	胡
				P	91.6.5	H	91.6.5	H	91.6.5	R	91.6.5
				V	國勝	K	石坪	K	榮鴻	T	文真
REV.	NAME	DATE	REMARK	D		D		D		N	

CUSTOMER MODEL NO. / TITLE	SPECIFICATION NO.	PAGE : 7 OF 9
OPTICAL TRANSMITTER JACK	FC684206T	DATE : JUN,05,2002

4. MECHANICAL EFFICIENCY

Item	Condition	Insertion force	Withdrawal force
4A) Insertion force And Withdrawal force	(With the gauge plug as show in 8) Initial After humidity test After heat test After cold test After resistance to soldering test After life test After temperature cycling test	0. 3kgf~4.0kgf (2.94N~39.4N)	

4B. Terminal strength

Every terminal shall be capable of withstand a force of 3kgf on 0.5 seconds without loosing and breakdown, but deformation of terminal is authorized.

The jack fixed on PCB, then shall be capable of inserted the gauge plug at 150 times, without loosing and breakdown, but force of inserted the gauge plug shall be less than 3kgf.

4C. Strength of tapping part

The tapping part shall be capable of a torque of 8kgf-cm for 5 seconds by M3×8 tapping tight screw and panel (t=1), the jack shall not be broken.

5. Construction

5A. Mating limit

Mating limit or range of between the plug and spring of jack shall be not regulated.

5B. Connection timing

The jack shall be permitted with connection timing whether shorting or not between the mutually separated terminals or spring of the pin jack, during the plug inserting and extracting.

5C. Creep age distance and spacing

Creep age distance and spacing between mutually insulated parts be 0.2mm minimum, these distance and spacing shall be maintained with or without the gauge plug inserted.

				A	趙	C	許	C	陳	W	胡
				P	91. 6. 5	H	91. 6. 5	H	91. 6. 5	R	91. 6. 5
				V	國勝	K	石坪	K	榮鴻	T	文真
REV.	NAME	DATE	REMARK	D		D		D			

CUSTOMER MODEL NO. / TITLE	SPECIFICATION NO	PAGE : 8 OF 9
OPTICAL TRANSMITTER JACK	FC684206T	DATE : JUN,05,2002

6. Environmental

6A. Life test

The life test shall consist of 150 cycles of insertion and withdrawal with gauge plug covered with a thin coat of grease in order to prevent from heating or wearing, at a rate of 20 to 30 cycles per minute under no load. At the conclusion of this test, the jack shall comply with Paragraphs 3 & 4, and be in operating condition.

6B. Humidity test

The jack shall be subjected to temperature of $40\pm 2^{\circ}\text{C}$ and relative humidity of 90% to 95% for a period of 96 hours. Upon completion of the exposure, dewdrops shall be blown out and removed from the jack, after which the jack shall be conditioned at room ambient conditions for 30 minutes. At the conclusion of this test, the jack shall comply with paragraphs 3 & 4.

6C. Heat test

The jack shall be subjected to temperature of $70\pm 2^{\circ}\text{C}$ for a period of 96 hours, then shall be allowed to remain in room ambient conditions for 30 minutes. At the conclusion of this test, the jack shall comply with Paragraph 3 & 4.

6D. Cold test

The jack shall be subjected to temperature of $-40\pm 3^{\circ}\text{C}$ for a period of 96 hours, then shall be allowed to remain in room ambient conditions for 30 minutes. At the conclusion of this test, the jack shall comply with Paragraph 3 & 4.

6E. Resistance to soldering heat test

The jack terminal shall be dipped in solder under the condition as specified below. At the conclusion of this test, the jack shall comply with Paragraph 3 & 4, and not show remarkable failure.

6E1. The terminal for a printed circuit board.


Temperature of solder: $260\pm 5^{\circ}\text{C}$; Dip time: 5 ± 1 seconds.

6E2. The terminal for a lead wire

Temperature of solder: $350\pm 10^{\circ}\text{C}$; Dip time: 3 ± 0.5 seconds.

6F. Temperature cycling test

The jack shall be subjected to the conditions as shown in fig as follows. And then shall returned and allowed to remain in room ambient condition for 30 minutes. At the conclusion of this test, the jack shall comply with Paragraph 3 & 4.

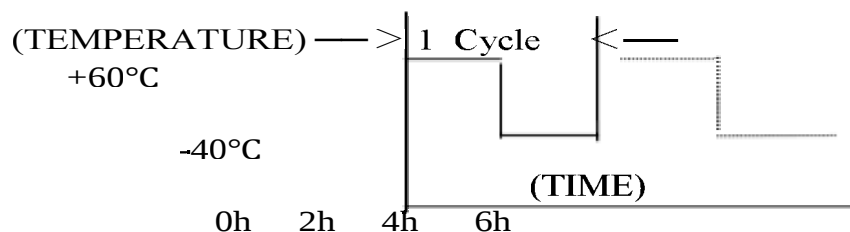

				A	趙	C	許	C	陳	W	胡
				P	91. 6. 5	H	91. 6. 5	H	91. 6. 5	R	91. 6. 5
				V	國勝	K	石坪	K	榮鴻	T	文真
REV.	NAME	DATE	REMARK	D		D		D		N	

CUSTOMER MODEL NO. / TITLE	SPECIFICATION NO.	PAGE : 9 OF 9
OPTICAL TRANSMITTER JACK	FC684206T	DATE : JUN,05,2002

6G. Soldering test

Area of soldering shall be capable of 95% or more of dip terminal area. Condition: Terminal of solder: $235\pm 5^{\circ}\text{C}$; Time of dip: 5 ± 0.5 sec. Length of dip: $2\pm 0.5\text{mm}$ (from top of terminal)

7. OTHERS

When the amendment of this specification comes into necessity, it shall be made by the mutual consultation and agreement between manufacturer and customer.


8. Mated plug

Surface roughness: Peak-to-valley height of 0.8 micron MAX.

For insertion and drawing force. Material: Stainless steel;

Finish: Chromium plated.

For contact resistance. Material: Brass; Finish: Silver plated.

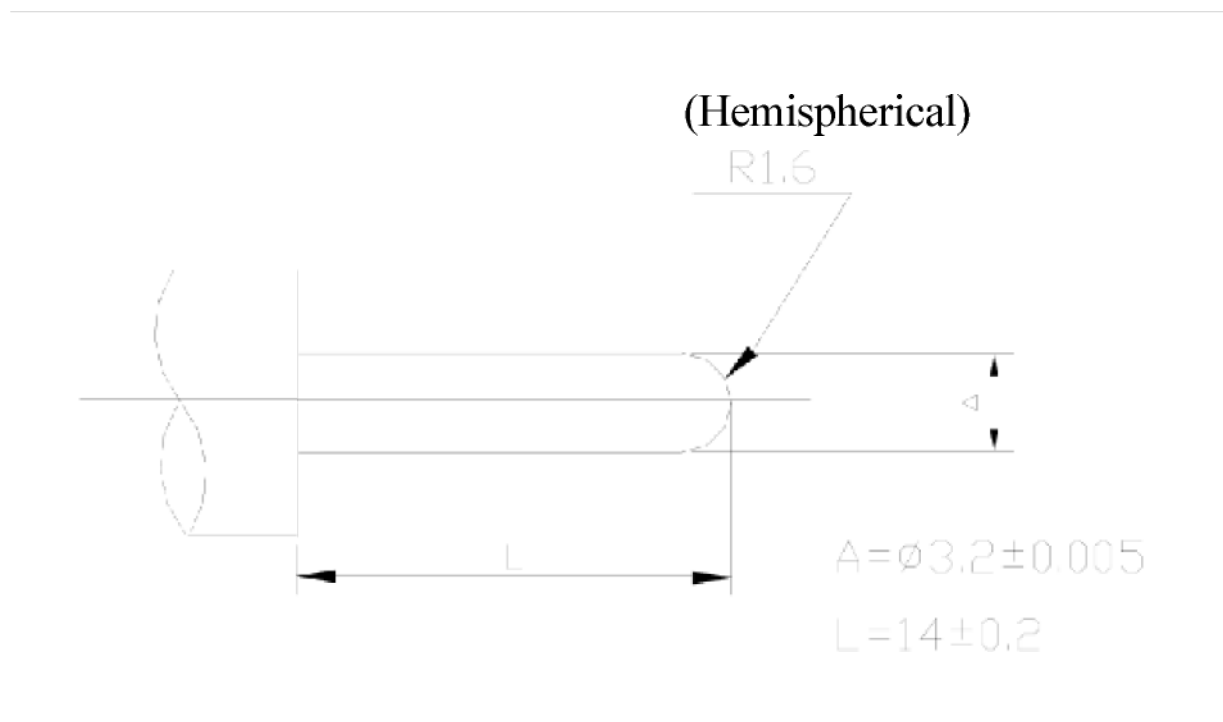

				A	趙	C	許	C	陳	W	胡
				P	91. 6. 5	H	91. 6. 5	H	91. 6. 5	R	91. 6. 5
				V	國勝	K	石坪	K	榮鴻	T	文真
REV.	NAME	DATE	REMARK	D		D		D		N	

Document No.	Document name	Rev.	DATE
01-E	Management standards for “Environment-related substances to be controlled”	1.6	OCT,26,2006

1. This part should not contain any substances which are specified in follow .(Except cadmium is less than 5ppm, Lead is under 90ppm)
2. In this case, pre-processing methods and measurement methods shall conform to ROHS.
3. List of “Environment-related Substances to be Controlled (‘The Controlled Substances’)

Substances		Allowable concentration
Heavy metals	Cadmium and cadmium compounds	Less 5ppm
	Lead and lead compounds	Less 90ppm
	Lead in the plastic,rubber,paints,ink	Less 50ppm
	Mercury and mercury compounds	
	Hexavalent chromium compounds	
Chlorinated organic compounds	Polychlorinated biphenyls (PCB)	
	Polychlorinated naphthalenes (PCN)	
	Chlorinated paraffins (CP)	
	Mirex (Perchlordecone)	
	Other chlorinated organic compounds	
Brominated organic compounds	Polybrominated biphenyls (PBB)	
	Polybrominated diphenylethers (PBDE)	
	Tetrabromobisphenol-A-bis- (2, 3-dibromopropylether) (TBBP-A-bis)	
	Other brominated organic compounds	
Organic tin compounds (tributy tin compounds, Triphenyl tin compounds)		
Asbestos		
Azo compounds		
Formaldehyde		
Polyvinyl chloride (PVC) and PVC blends		

4. Allowable concentrations:

Less than 90ppm is determined as an allowable total-concentration of four heavy metals (mercury, cadmium, hexavalent chromium, and lead). Less than 5ppm is determined as an allowable cadmium-concentration in a plastic (including rubber) part.

				A		C		C	林	W	
				P		H		H	05.10.26	R	
				V	陳代	K		K	美曲	T	
REV.	NAME	DATE	REMARK	D		D		D		N	

CHI MEI CORPORATION

59-1 SAN CHIA JEN TE TAINAN HSIEN TAIWAN

Material Designation: PA-765A (+)

Product Description: Acrylonitrile Butadiene Styrene (ABS), designated "Polylac" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	1.5	V-1	-	-	85	80	85	-	-
	2.1	V-0, 5V-B	3	0	85	80	85	-	-
	2.5	5VA	-	0	85	80	85	-	-
	3.0	V-0	0	0	85	80	85	-	-
CTI: 0				HVTR: 0		D495: 7		IEC BP: -	

(+) Optional prefix or suffix may be used to denote 0-0.5% acid scavengers.

Report Date: 06/23/1983

Underwriters Laboratories Inc®

267295002

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

QMFZ2 Component - Plastics

Monday, December 14, 1998

E56070

CHI MEI CORPORATION

59-1 SAN CHIA JEN TE TAINAN HSIEN TAIWAN

Material Designation: PA-777D

Product Description: Acrylonitrile Butadiene Styrene/Phenyl Maleimide (ABS/PMI), designated "Polylac" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	1.5	HB	4	0	50	50	50	-	-
CTI: 1		HVTR: 0		D495: 7		IEC BP: -			

Report Date: 03/10/1993

Underwriters Laboratories Inc®

267295002

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

E I DUPONT DE NEMOURS & CO INC

ENGINEERING POLYMERS CHESTNUT RUN PLAZA PO BOX 80713 WILMINGTON DE 19880

Material Designation: 70G33L(+)

Product Description: Polyamide 66 (PA66), glass reinforced, designated "Zytel" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.71	HB	4	0	130	120	130	-	-
	1.5	HB	4	0	130	120	130	-	-
	3.0	HB	4	0	130	120	130	-	-
CTI: 0		HVTR: 1		D495: 5		IEC BP: -			

(+) Virgin and Regrind up to 50% by weight inclusive, have the same basic material characteristics.

NOTE (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" or "MIN".

Report Date: 08/06/1996

Underwriters Laboratories Inc®

324299147

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.