
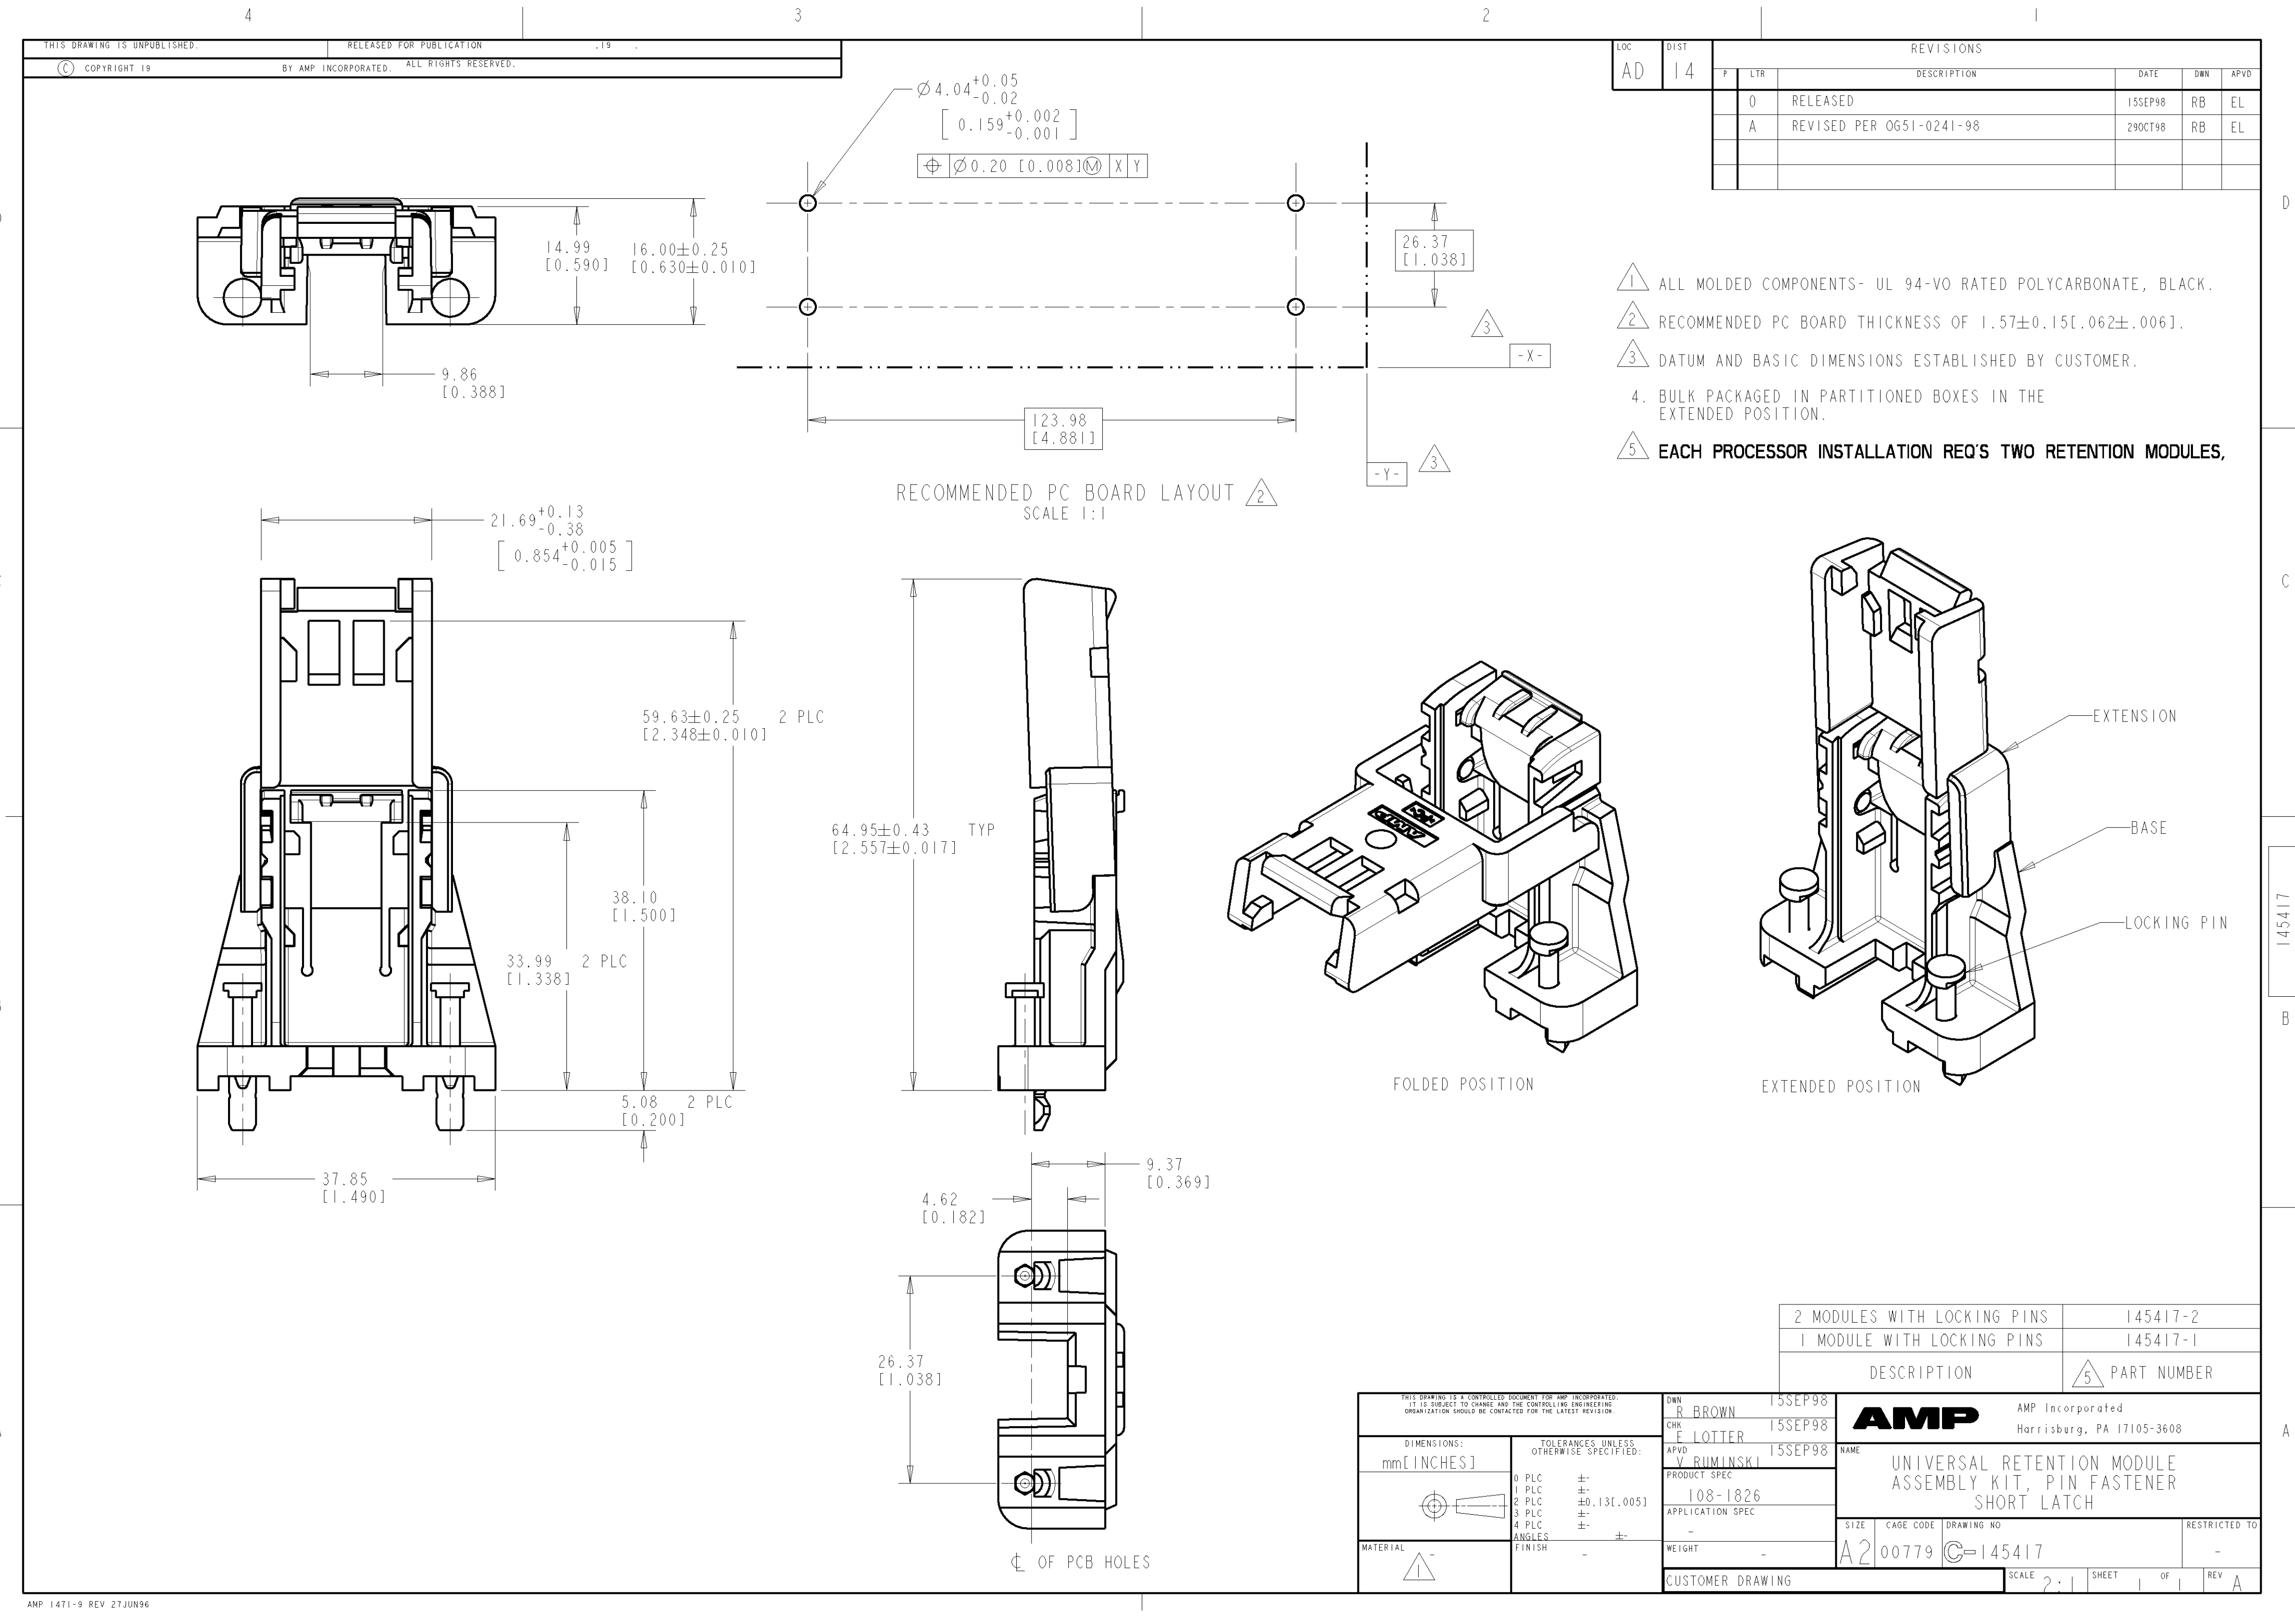




LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
AD	14	0		RELEASED	15SEP98	RB
		A		REVISED PER 0651-0241-98	29OCT98	RB

- 1 ALL MOLDED COMPONENTS- UL 94-VO RATED POLYCARBONATE, BLACK.
- 2 RECOMMENDED PC BOARD THICKNESS OF 1.57±0.15[.062±.006].
- 3 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 4 BULK PACKAGED IN PARTITIONED BOXES IN THE EXTENDED POSITION.
- 5 EACH PROCESSOR INSTALLATION REQ'S TWO RETENTION MODULES,

2 MODULES WITH LOCKING PINS	145417-2
1 MODULE WITH LOCKING PINS	145417-1
DESCRIPTION	5 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN R BROWN 15SEP98		AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm[INCHES]		CHK E LOTTER 15SEP98			
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.13[.005] 3 PLC ± 4 PLC ± ANGLES ± FINISH -	APVD V RUMINSKI 15SEP98		NAME UNIVERSAL RETENTION MODULE ASSEMBLY KIT, PIN FASTENER SHORT LATCH	
		PRODUCT SPEC 108-1826		RESTRICTED TO	
MATERIAL 		APPLICATION SPEC -		SIZE A2	CAGE CODE 00779
		WEIGHT -		DRAWING NO C-145417	
		CUSTOMER DRAWING		SCALE 2:1	SHEET 1
				OF 1	REV A