

Specification	Products VISUAL LIGHT EMITTING DIODES	Type S L H - 5 6 V R 3 F
---------------	--	-----------------------------

1. TYPE NAME S L H - 5 6 V R 3 F
2. CONSTRUCTION GaAsP on GaP red Visual Light Emitting Diodes packaged with red diffused epoxy.
3. USAGE Power source for display unit.
4. DIMENSIONS See Figure 1
5. ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Power Dissipation	P_D	75 mW
Forward Current	I_F	25 mA
Peak Forward Current	I_{FP}	60 mA (notes 1)
Reverse Voltage	V_R	3 V
Operating Temperature	T_{opr}	-25°C ~ +85°C
Storage Temperature	T_{stg}	-30°C ~ +100°C

(notes 1 Duty 1/5 Pulse Width 1ms)

6. ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)


DESCRIPTION	SYMBOL	CONDITION	MIN	TYP	MAX	UNITS
Luminous Intensity	I_V	$I_F = 20\text{mA}$	13.5	47	—	mcd
Forward Voltage	V_F	$I_F = 20\text{mA}$	—	2.1	3.0	V
Reverse Current	I_R	$V_R = 3\text{V}$	—	—	10	μA
Peak Wave Length	λ_P	$I_F = 20\text{mA}$	—	650	—	nm
Spectral Line Half Width	$\Delta\lambda$	$I_F = 20\text{mA}$	—	40	—	nm
Input/Output Frequency	—	—	—	67.6	—	MHz

xc

According to Luminous Intensity value ROHM will specify under following rank.

ITEM	SPECIFICATION	ITEM	SPECIFICATION
X B	13.5 ~ 24	X E	42 ~ 75
X C	20 ~ 36	X F	61 ~ 110
X D	30 ~ 52	X G	90 ~ 165

Figure. 1

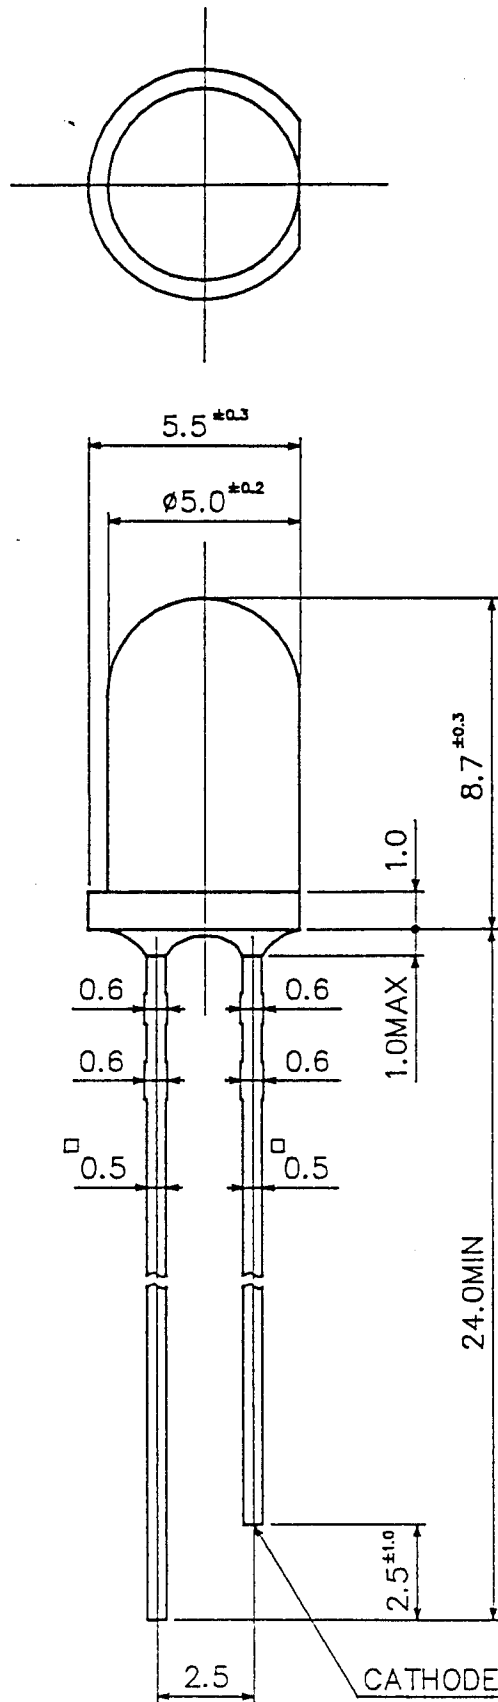

(Unit: mm)

Specification	Products	Type
	VISUAL LIGHT EMITTING DIODES	S L H - 5 6 V R 3 F

7. IV CLASSIFICATION

ITEM	IV CLASSIFICATION
" P "	22 ~ 45 mcd
" Q "	36 ~ 71 mcd
" R "	56 ~ 110 mcd
" S "	90 ~ (180) mcd

IF=20mA

Due to luminous intensity up, Intensity might shift.

8. FACTORY OF ORIGIN

WAKO ELECTRIC CO., LTD. (OKAYAMA, JAPAN)
 ROHM-WAKO SDN. BHD (MALAYSIA)
 ROHM KOREA CORPORATION (KOREA)

9. WEIGHT

About 0.31 g per 1 piece

Specification	Products VISUAL LIGHT EMITTING DIODES	Type S L H - 5 6 V R 3 F
---------------	--	-----------------------------

1. TYPE NAME S L H - 5 6 V R 3 F
2. CONSTRUCTION GaAsP on GaP red Visual Light Emitting Diodes packaged with red diffused epoxy.
3. USAGE Power source for display unit.
4. DIMENSIONS See Figure 1
5. ABSOLUTE MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$)

Power Dissipation	P_D	75 mW
Forward Current	I_F	25 mA
Peak Forward Current	I_{FP}	60 mA (notes 1)
Reverse Voltage	V_R	3 V
Operating Temperature	T_{opr}	$-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Storage Temperature	T_{stg}	$-30^{\circ}\text{C} \sim +100^{\circ}\text{C}$
(notes 1 Duty 1/5 Pulse Width 1ms)		

6. ELECTRO-OPTICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$)

DESCRIPTION	SYMBOL	CONDITION	MIN	TYP	MAX	UNITS
Luminous Intensity	I_V	$I_F=20\text{mA}$	13.5	47	—	mcd
Forward Voltage	V_F	$I_F=20\text{mA}$	—	2.1	3.0	V
Reverse Current	I_R	$V_R=3\text{V}$	—	—	10	μA
Peak Wave Length	λ_P	$I_F=20\text{mA}$	—	650	—	nm
Spectral Line Half Width	$\Delta\lambda$	$I_F=20\text{mA}$	—	40	—	nm
Input/Output Frequency	—	—	—	67.6	—	MHz

x c

ROHM CO., LTD.

Design T. Yamaguchi	Approval K. Takano	Specification No. SLH56VR-A1	Date Mar. 20/95
------------------------	-----------------------	---------------------------------	--------------------