

LC1 LENSES FOR CREE XR-E LEDs



- Specially designed for Cree XLAMP XR-E series of LEDs.
- Special care taken to make a uniform white or warm white illumination. Lenses work well with other colors, too.
- Lens material optical grade PMMA. Allows use of high current and temperature conditions. Holder material ABS.
- Best available optical efficiency, more than 90%, with an extremely good cutoff of light
- Fastening of holden to PCB with appropriate adhesive, e.c. epoxy or polyurethane based. NOTE: DO NOT USE SUPERGLUE.


LENS TYPES

NAME	ORDERING CODE	FWHM Angle
LC1 REAL SPOT	FA10808 LC1-RS	$\pm 3^\circ$
LC1 DIFFUSER	FA10810 LC1-D	$\pm 5^\circ$
LC1 MEDIUM /DIFFUSER	FA11372 LC1-MD	$\pm 12^\circ$
LC1 MEDIUM	FA10807 LC1-M	$\pm 14^\circ$
LC1 OVAL	FA11104 LC1-O-90	$\pm 5^\circ \times \pm 21^\circ$
LC1 RECTANGULAR	FA10809 LC1-REC	$\pm 21^\circ \times \pm 11^\circ$


© Ledil Oy – PRELIMINARY - Subject to change without prior notice

MEASUREMENT DATA

Relative Intensity LC1-RS

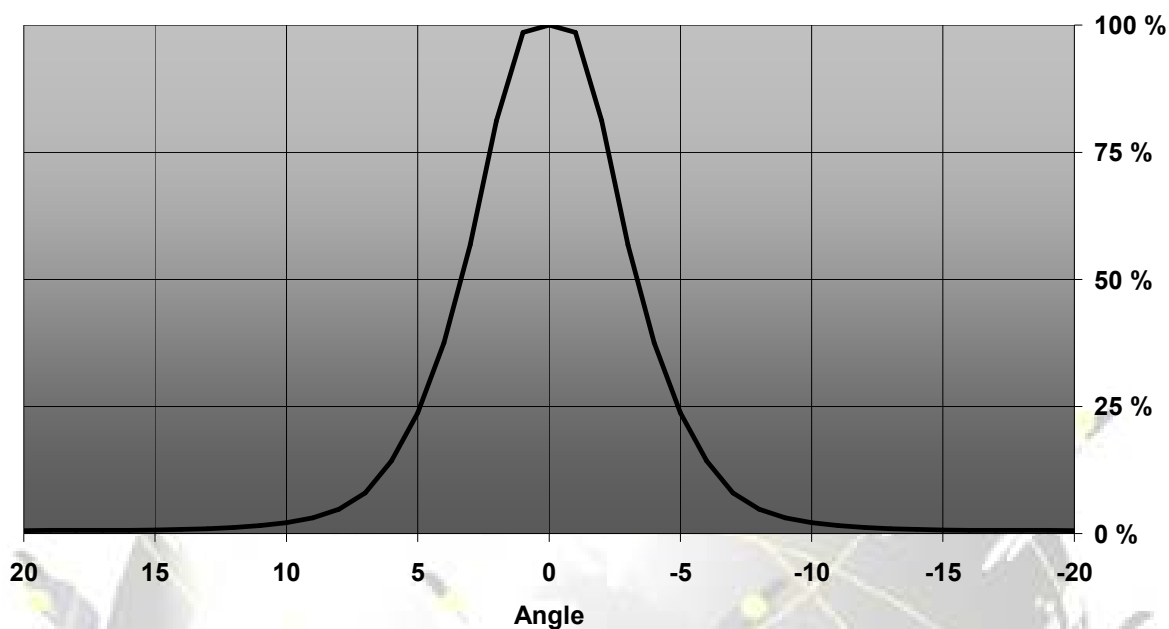


Relative Intensity of FA10810_LC1-D

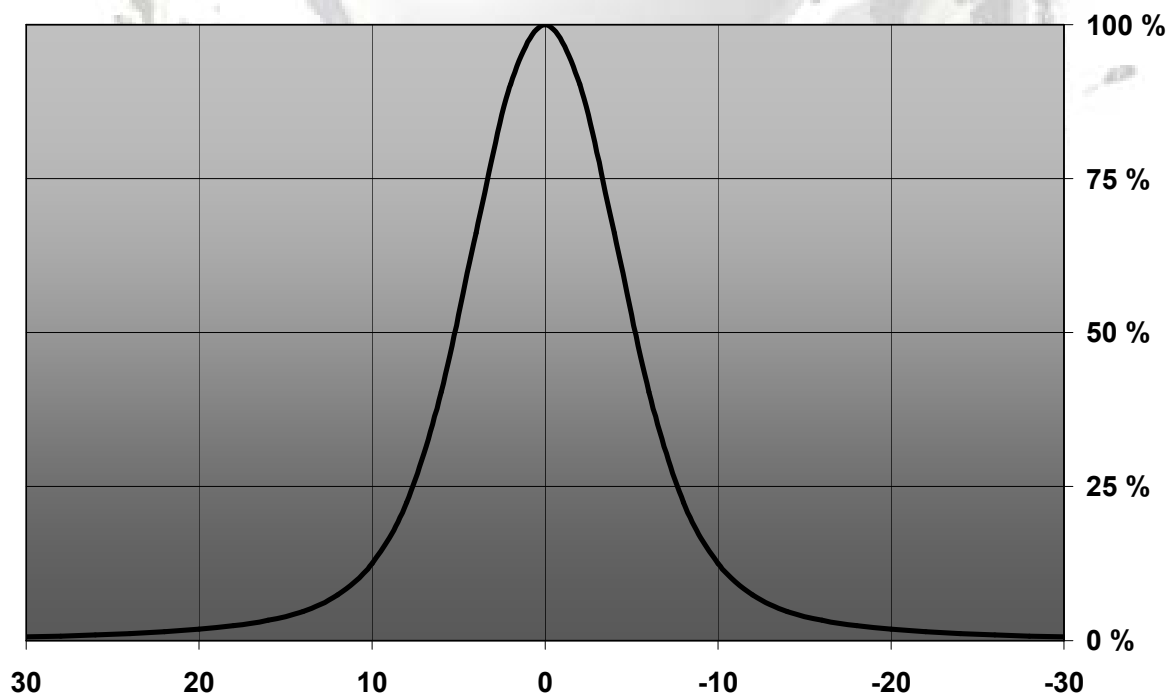


© Ledil Oy – PRELIMINARY - Subject to change without prior notice

Relative Intensity of FA11373_LC1-MD-Tape

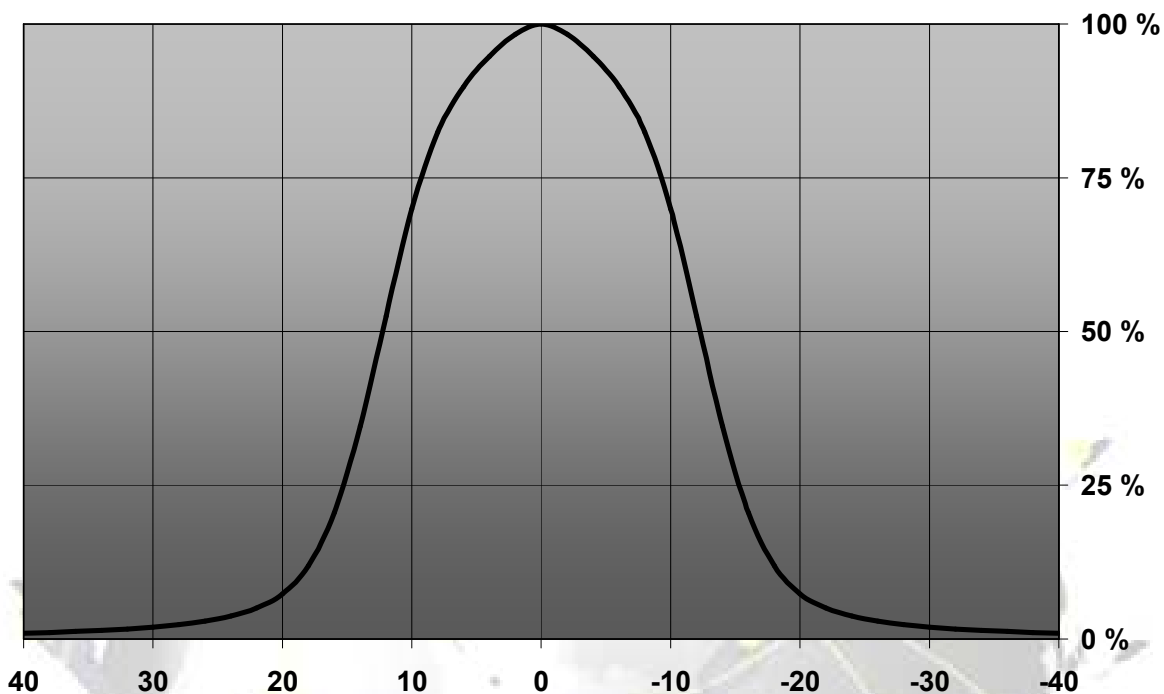


Relative Intensity of LC1-M

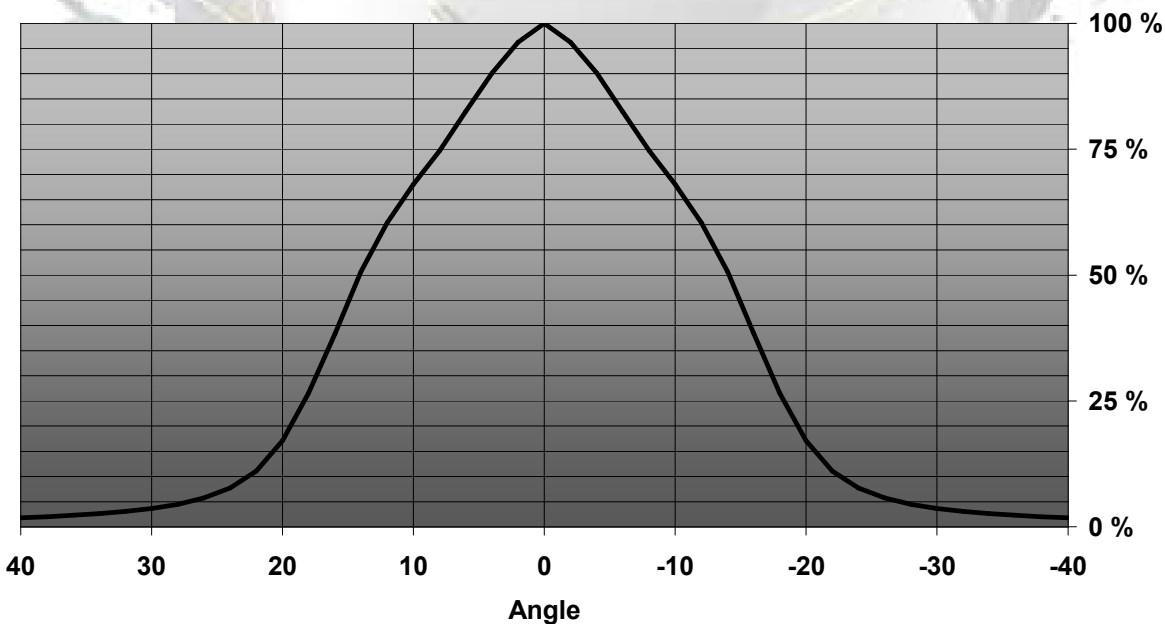


© Ledil Oy – PRELIMINARY - Subject to change without prior notice

Relative Intensity of LC1-REC

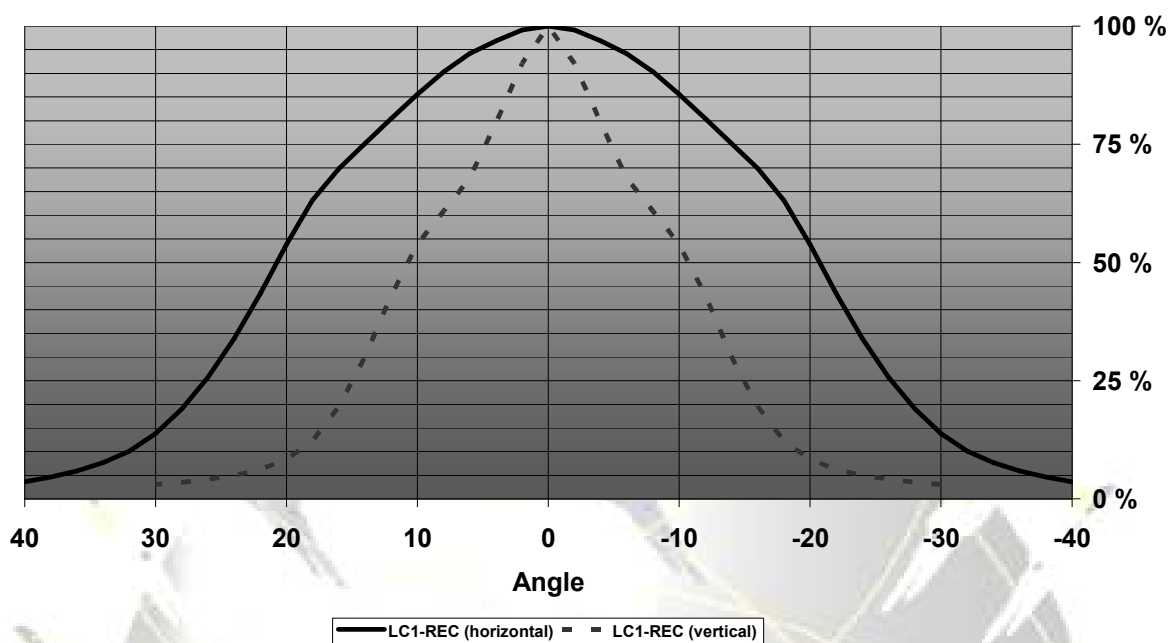

EULUMDAT & IES FILES AVAILABLE BY REQUEST

DRAWINGS

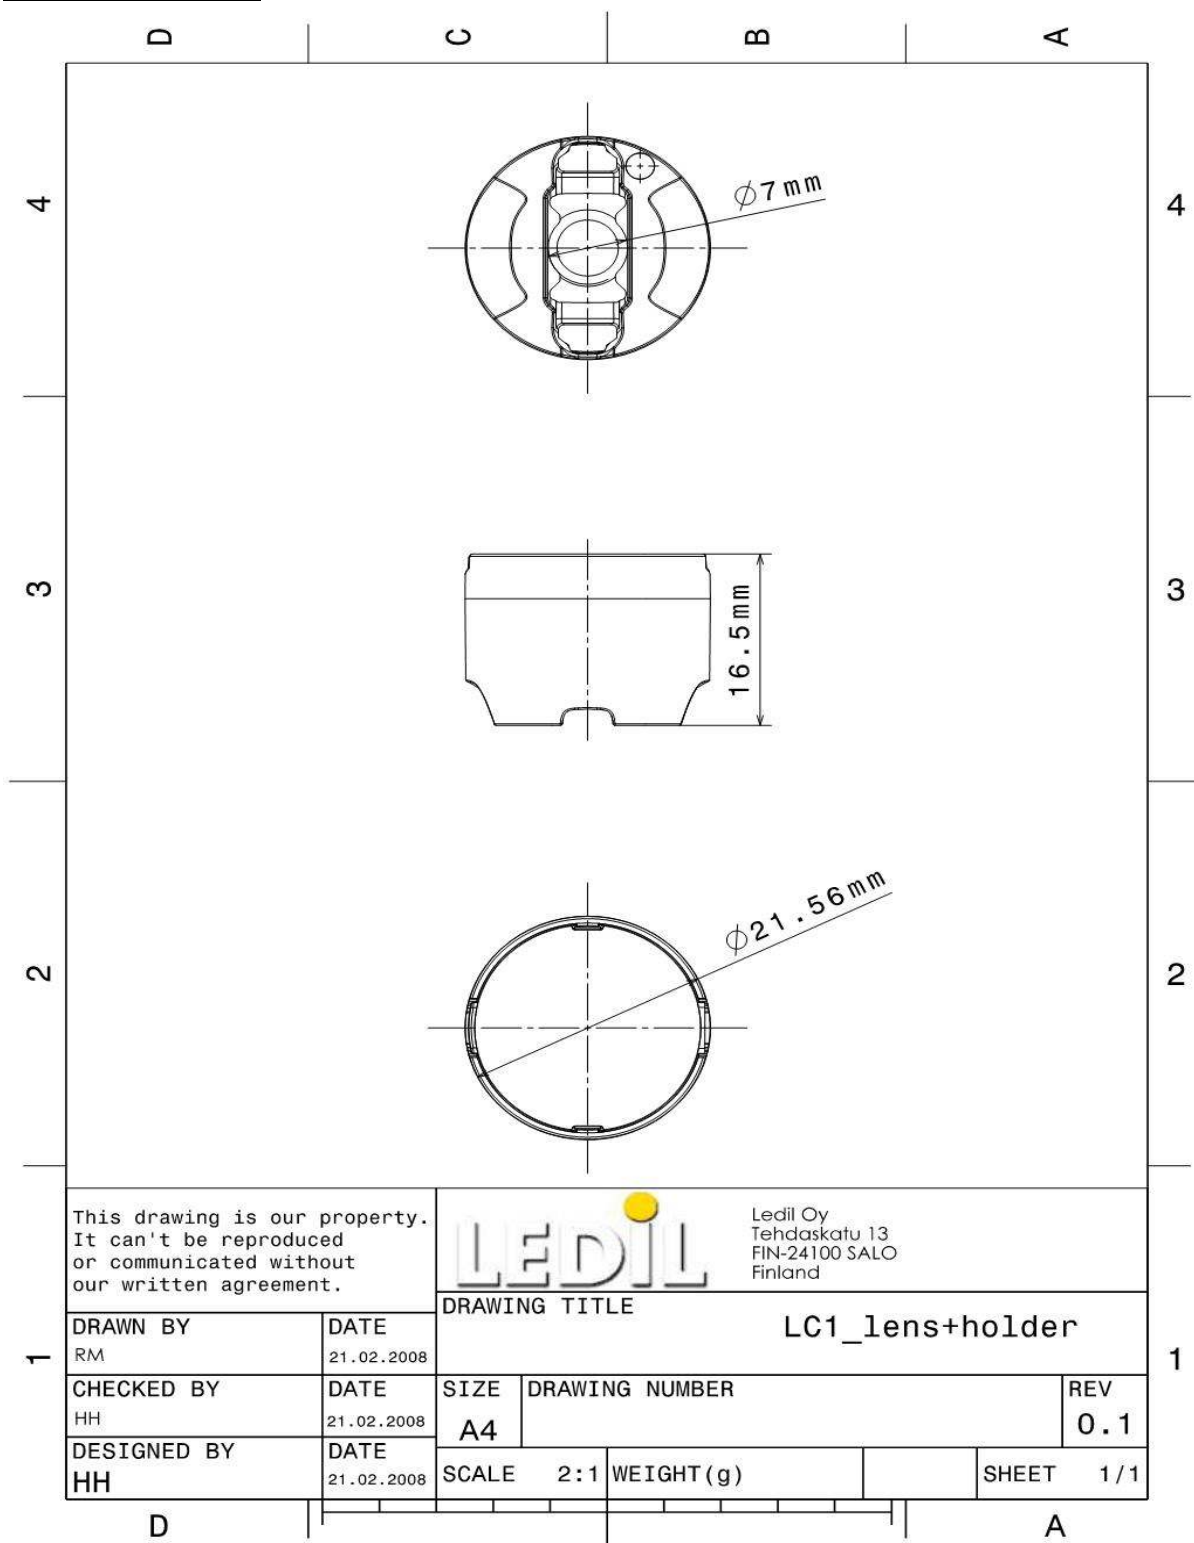

© Ledil Oy - PRELIMINARY - Subject to change without prior notice