



3M™ FOUR-WALL CONDO HEADER, 3000 SERIES


.100" X .100" LATCH/EJECTOR, RIGHT ANGLE

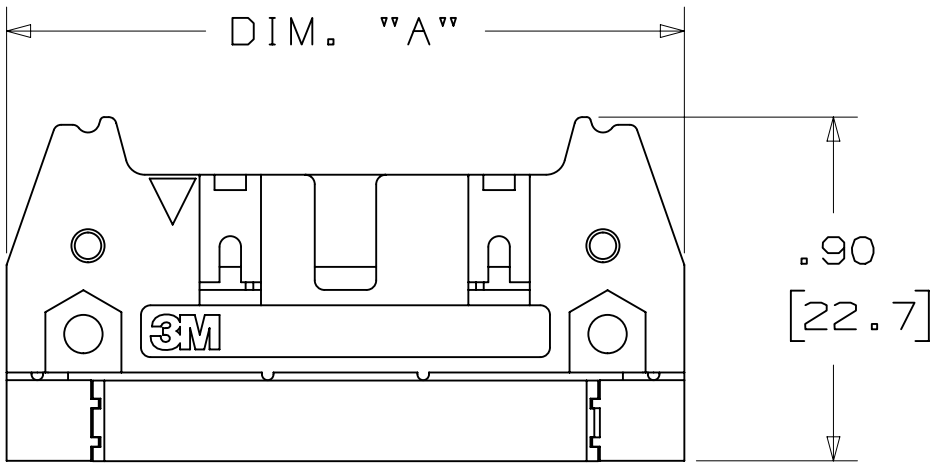

-L00X
HEADER WITHOUT LATCH EJECTOR

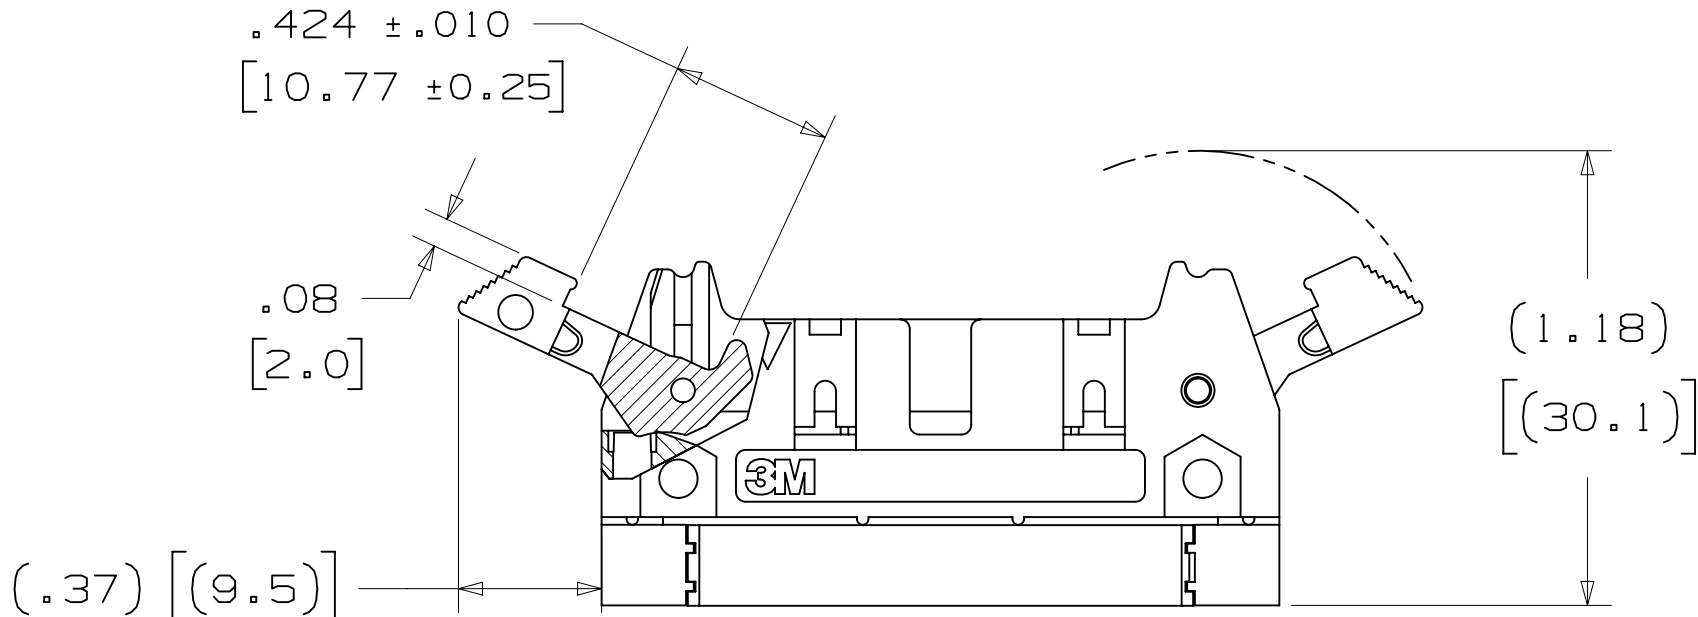

-L20X
HEADER WITH SHORT LATCH EJECTOR
FOR 3M SOCKETS WITHOUT STRAIN RELIEF

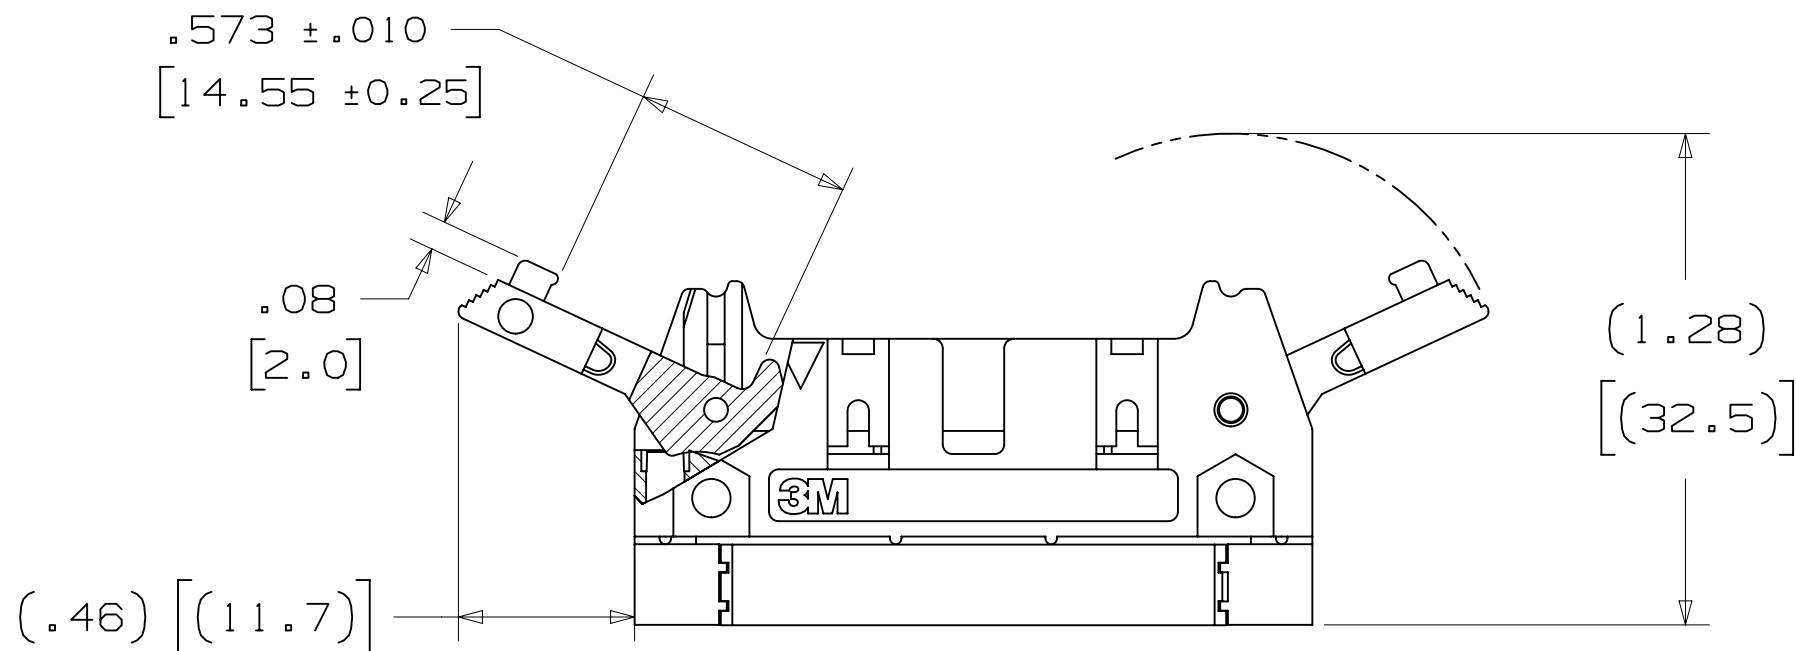

-L30X
HEADER WITH LONG LATCH EJECTOR
FOR 3M SOCKETS WITH STRAIN RELIEF

2 PHYSICAL :

INSULATOR: GLASS FILLED POLYESTER (PCT)
MATERIAL: UL94V-0
FLAMMABILITY: COLOR: BLACK
CONTACT: MATERIAL: COPPER ALLOY
PLATING: UNDER PLATING: 100μ" [2.54μm] NICKEL-OVERALL
WIPING AREA: 30μ" [0.76μm] AVG. GOLD
SOLDER TAILS: 200μ" [5.08μm] TIN LEAD OR MATTE TIN (SEE ORDERING INFORMATION)
MARKINGS: 3M LOGO, PART IDENTIFICATION NUMBER AND ORIENTATION TRIANGLE

2 ELECTRICAL :

CURRENT RATING: 1A (EIA 364-70)
INSULATION RESISTANCE: >1 X 10⁹Ω AT 500 V_{DC}
WITHSTANDING VOLTAGE: 1,000V_{RMS} AT SEA LEVEL

2 ENVIRONMENTAL :

TEMPERATURE RATING: -55°C TO 105°C
PROCESS RATING: 260°C, PER J-STD-020C, SINGLE PASS
MOISTURE SENSITIVITY LEVEL: 1 (PER J-STD-020C)

ORDERING INFORMATION

X3XXX-LXXXXX

N= HIGH TEMP BLACK (PCT)/(RB PLATING REQ'D)
BLANK= (UB PLATING)

3M PART NUMBER:
(SEE TABLE 1)

LATCH/EJECTOR SYSTEM:
0 = NO LATCH/EJECTOR INSTALLED
2 = SHORT ROLL PIN LATCH/EJECTORS
3 = LONG ROLL PIN LATCH/EJECTORS

TAIL:
02 = FOR .062 [1.57] THICK BOARD
03 = FOR .094 TO .125 [2.39 TO 3.18] THICK BOARD

PLATING:
RB = 30μ" [0.76μm] GOLD AND 200μ" [5.08μm] MATTE TIN
(APP. E1 & C1 APPLY)
UB = 30μ" [0.76μm] GOLD AND 200μ" [5.08μm]
TIN LEAD (APP. E3 & C2 APPLY)






3M ELECTRONIC MATERIALS SOLUTIONS DIVISION
INTERCONNECT SOLUTIONS
<http://www.3mconnectors.com>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

- * STACKED PINS CONSERVE SPACE ON THE CIRCUIT BOARD ALLOWING HIGHER DENSITY PACKAGING.
- * PIN QUANTITY TO 128 GIVES DESIGN FLEXIBILITY WITH LATCHING.
- * "HDI" ALTERNATIVE.
- * ACCEPTS STANDARD IDC SOCKETS.
- * MATES WITH STANDARD FLAT CABLE HARNESSSES.
- * HIGH TERMERATURE INSULATOR SUITABLE FOR "NO LEAD" SOLDERING OPERATIONS.
- * SUITABLE FOR REFLOW SOLDERING USING "PASTE IN HOLE" TECHNIQUES.

- NOTES
1. REGULATORY INFORMATION:
ROHS COMPLIANT. SEE THE
REGULATORY INFORMATION
APPENDIX (RIA) IN THE
"ROHS COMPLIANCE" SECTION
OF WWW.3MCONNECTORS.COM FOR
COMPLIANCE INFORMATION.
 2. IN THE EVENT OF CONFLICT
BETWEEN THIS DATA AND THAT
CONTAINED IN THE PRODUCT
SPECIFICATION, THE PRODUCT
SPECIFICATION TAKES PRECEDENT.
 3. NOTCHES A & C WILL ACCOMODATE
3M POLARIZING KEY: N3518.
 4. MOUNTING HARDWARE:
FROM SOLDER SIDE OF PC BOARD
USE #4-24 THREAD CUTTING SCREW
(3M PART #3341-5) AND
Ø.116 [2.95] MOUNTING HOLE.

DIMENSIONS: INCHES [MM]
[MM] IS REF. ONLY

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
ADDRESS		CODES		DATE		ISSUE DATE AND DESCRIPTION		DATE	CHKD
DO NOT SCALE DRAWING		SCALE 2/1		TOLERANCES EXCEPT AS NOTED		INCHES .00 ± .01 .000 ± .005 .0000 ±		THIRD ANGLE PROJECTION	
INTERPRET PER ASME Y14.5 - 2009		MAX SURFACE ROUGHNESS DET SURFACES MARKED ONLY		MODEL		3000 SERIES		DET LISTS YES NO SHT 1 OF 3	
DIVISION Interconnect Solutions		DIVISION CODE EMSD		3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2015 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.		TITLE HEADER, 4-WALL, CONDO, .100 X .100 LATCH/EJECTOR, RA	
									
DO NOT SCALE DRAWING		SCALE 2/1		TOLERANCES EXCEPT AS NOTED		INCHES .00 ± .01 .000 ± .005 .0000 ±		THIRD ANGLE PROJECTION	
INTERPRET PER ASME Y14.5 - 2009		MAX SURFACE ROUGHNESS DET SURFACES MARKED ONLY		MODEL		3000 SERIES		DET LISTS YES NO SHT 1 OF 3	
CAGE NUMBER		SIZE		DRAWING NO.		REV.		K	
D78-5100-0774-9		D78-5100-0774-9		D78-5100-0774-9		D78-5100-0774-9		D78-5100-0774-9	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M		3M		3M		3M		3M	
3M									

UL FILE NO: E68080

3M™ FOUR-WALL CONDO HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, RIGHT ANGLE


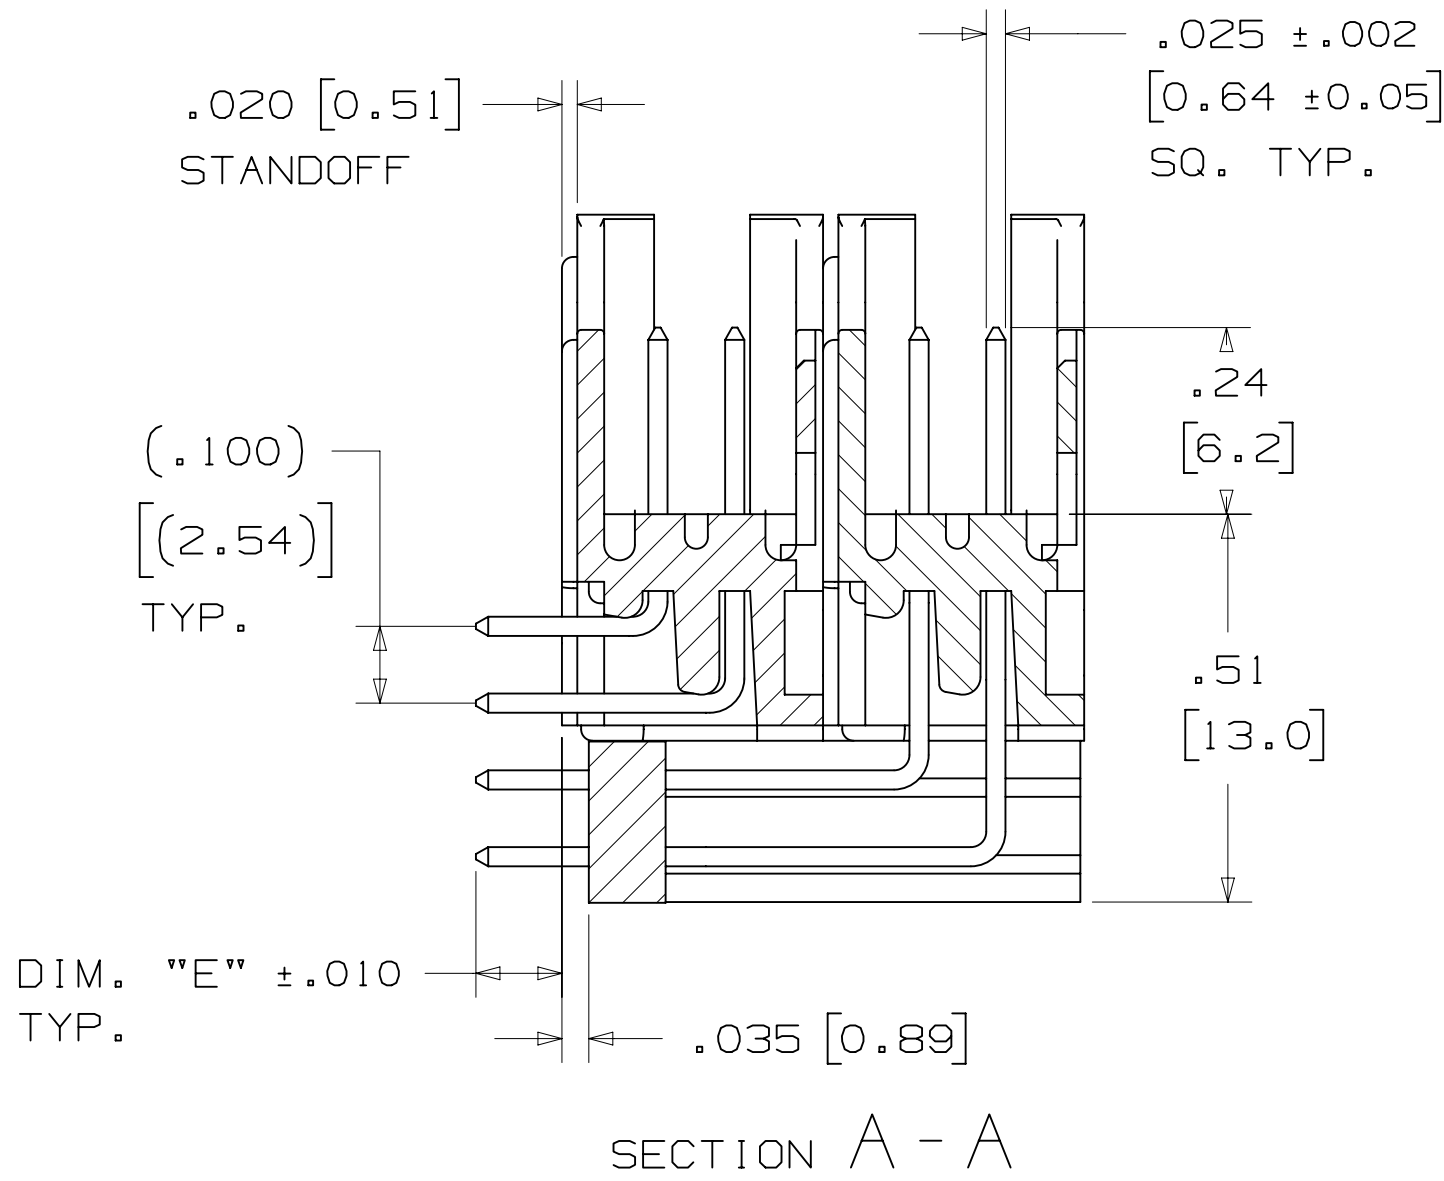


TABLE 1						
PIN QTY.	3M PART NUMBER	DIM. "A"	DIM. "C"	DIM. "D"	POLARIZING NOTCHES	PIN QTY.
20	3793	1.26 [32.1]	.865 [21.97]	.71 [18.0]	BC	20
28	3314	1.46 [37.2]	1.065 [27.05]	.91 [23.1]	BC	28
32	3408	1.56 [39.7]	1.165 [29.59]	1.01 [25.6]	ABC	32
40	3428	1.76 [44.8]	1.365 [34.67]	1.21 [30.7]	ABC	40
48	3627	1.96 [49.9]	1.565 [39.75]	1.41 [35.8]	ABC	48
52	3429	2.06 [52.4]	1.665 [42.29]	1.51 [38.3]	ABC	52
60	3440	2.26 [57.5]	1.865 [47.37]	1.71 [43.4]	ABC	60
68	3431	2.46 [62.6]	2.065 [52.45]	1.91 [48.5]	ABC	68
80	3432	2.76 [70.2]	2.365 [60.07]	2.21 [56.1]	ABC	80
100	3433	3.26 [82.9]	2.865 [72.77]	2.71 [68.8]	ABC	100
120	3372	3.76 [95.6]	3.365 [85.47]	3.21 [81.5]	ABC	120
128	3764	3.96 [100.7]	3.565 [90.55]	3.41 [86.6]	ABC	128

TABLE 2		
3M PART NUMBER SUFFIX	CONTACT TAIL	DIM. "E"
-XX02	02	.112 [2.84]
-XX03	03	.155 [3.94]


NOTE:
.112 [2.84] TAIL LENGTH SUITABLE FOR
.062 [1.57] THICK PC BOARD.

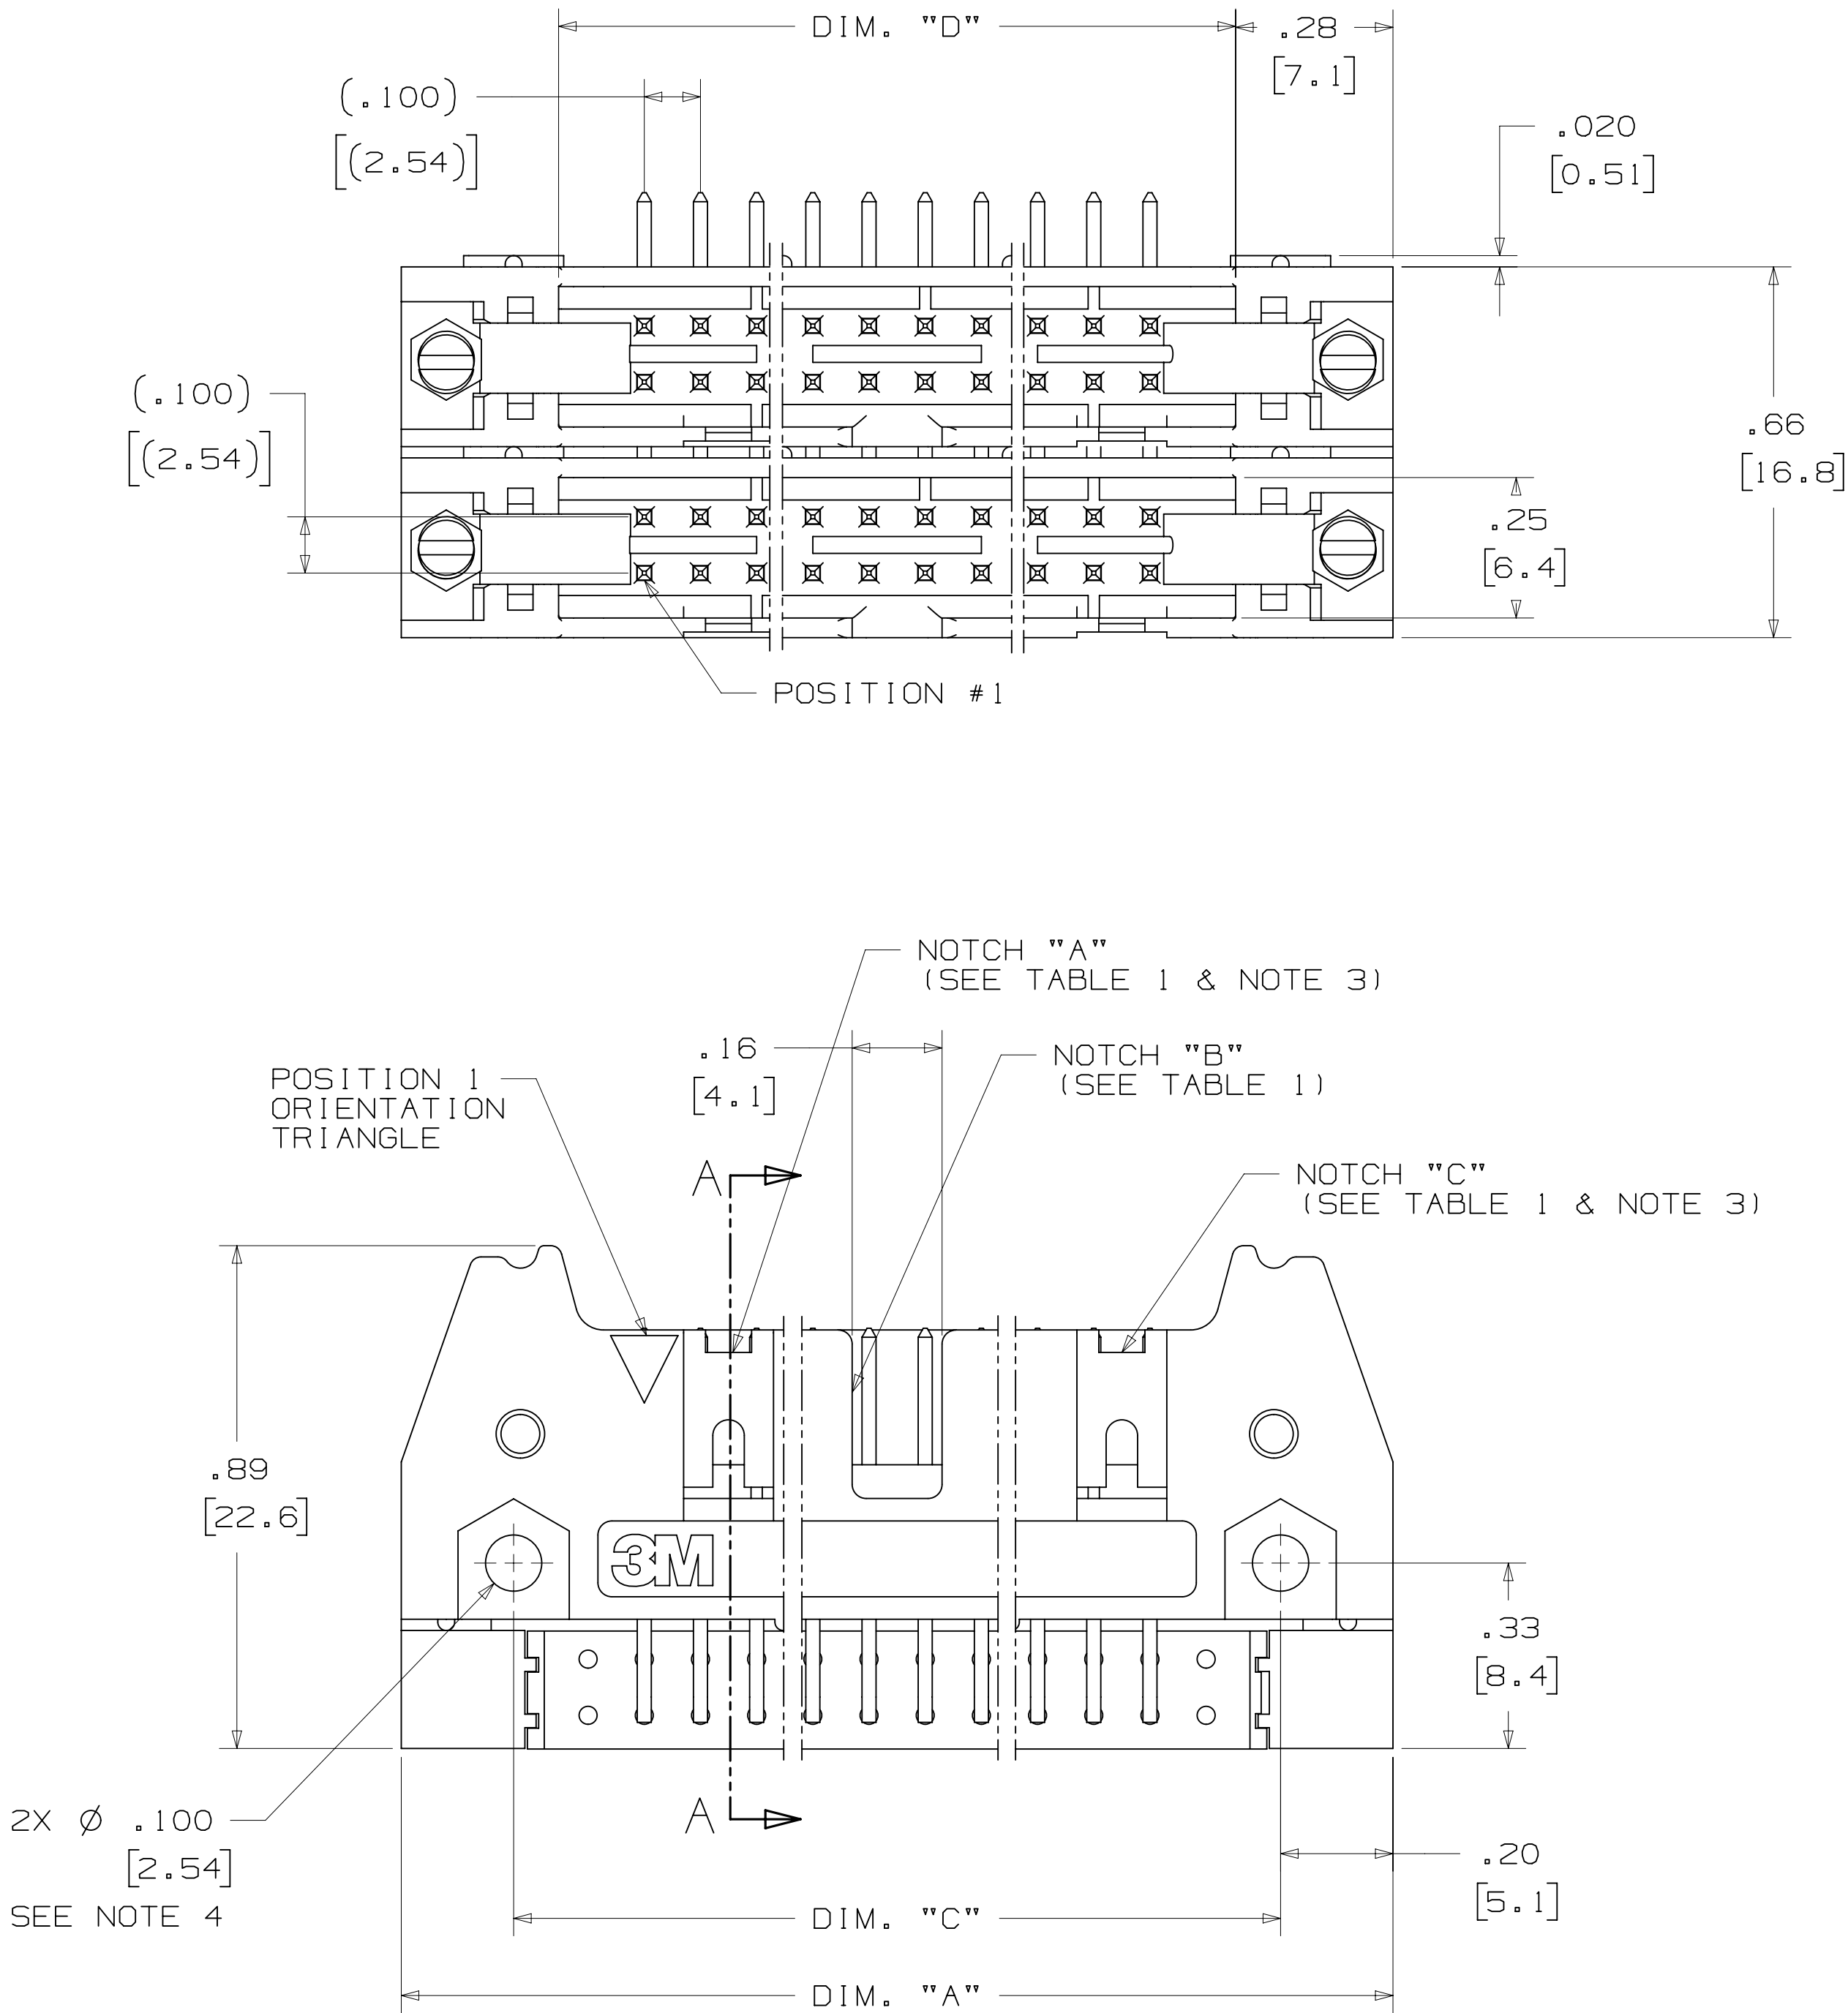

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
3M CODES	3M CODES	3M CODES	3M CODES	3M CODES	3M CODES	3M CODES
DIVISION	DIVISION CODE	DATE	DATE	DATE	DATE	DATE
Interconnect Solutions	EMSD	AUG 05, 2014	AUG 05, 2014	AUG 05, 2014	SEP 05, 2014	SEP 05, 2014
DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED	TOLERANCES EXCEPT AS NOTED	TOLERANCES EXCEPT AS NOTED	TOLERANCES EXCEPT AS NOTED	TOLERANCES EXCEPT AS NOTED
THIRD ANGLE PROJECTION	THIRD ANGLE PROJECTION	INCHES	INCHES	INCHES	INCHES	INCHES
MAX SURFACE ROUGHNESS	MAX SURFACE ROUGHNESS	MILLIMETERS	MILLIMETERS	MILLIMETERS	MILLIMETERS	MILLIMETERS
MARKED ONLY	MARKED ONLY	MARKED ONLY	MARKED ONLY	MARKED ONLY	MARKED ONLY	MARKED ONLY
TITLE		3M				
HEADER, 4-WALL, CONDO, .100 X .100 LATCH/EJECTOR, RA		3M Center St. Paul, MN 55144				
CAGE NUMBER		DRAWING NO.				
D78-5100-0774-9		K				
MODEL		3000 SERIES				
LISTS		YES NO				
SHT 2 OF 3		SHT 2 OF 3				

3M™ FOUR-WALL CONDO HEADER, 3000 SERIES

.100" X .100" LATCH/EJECTOR, RIGHT ANGLE

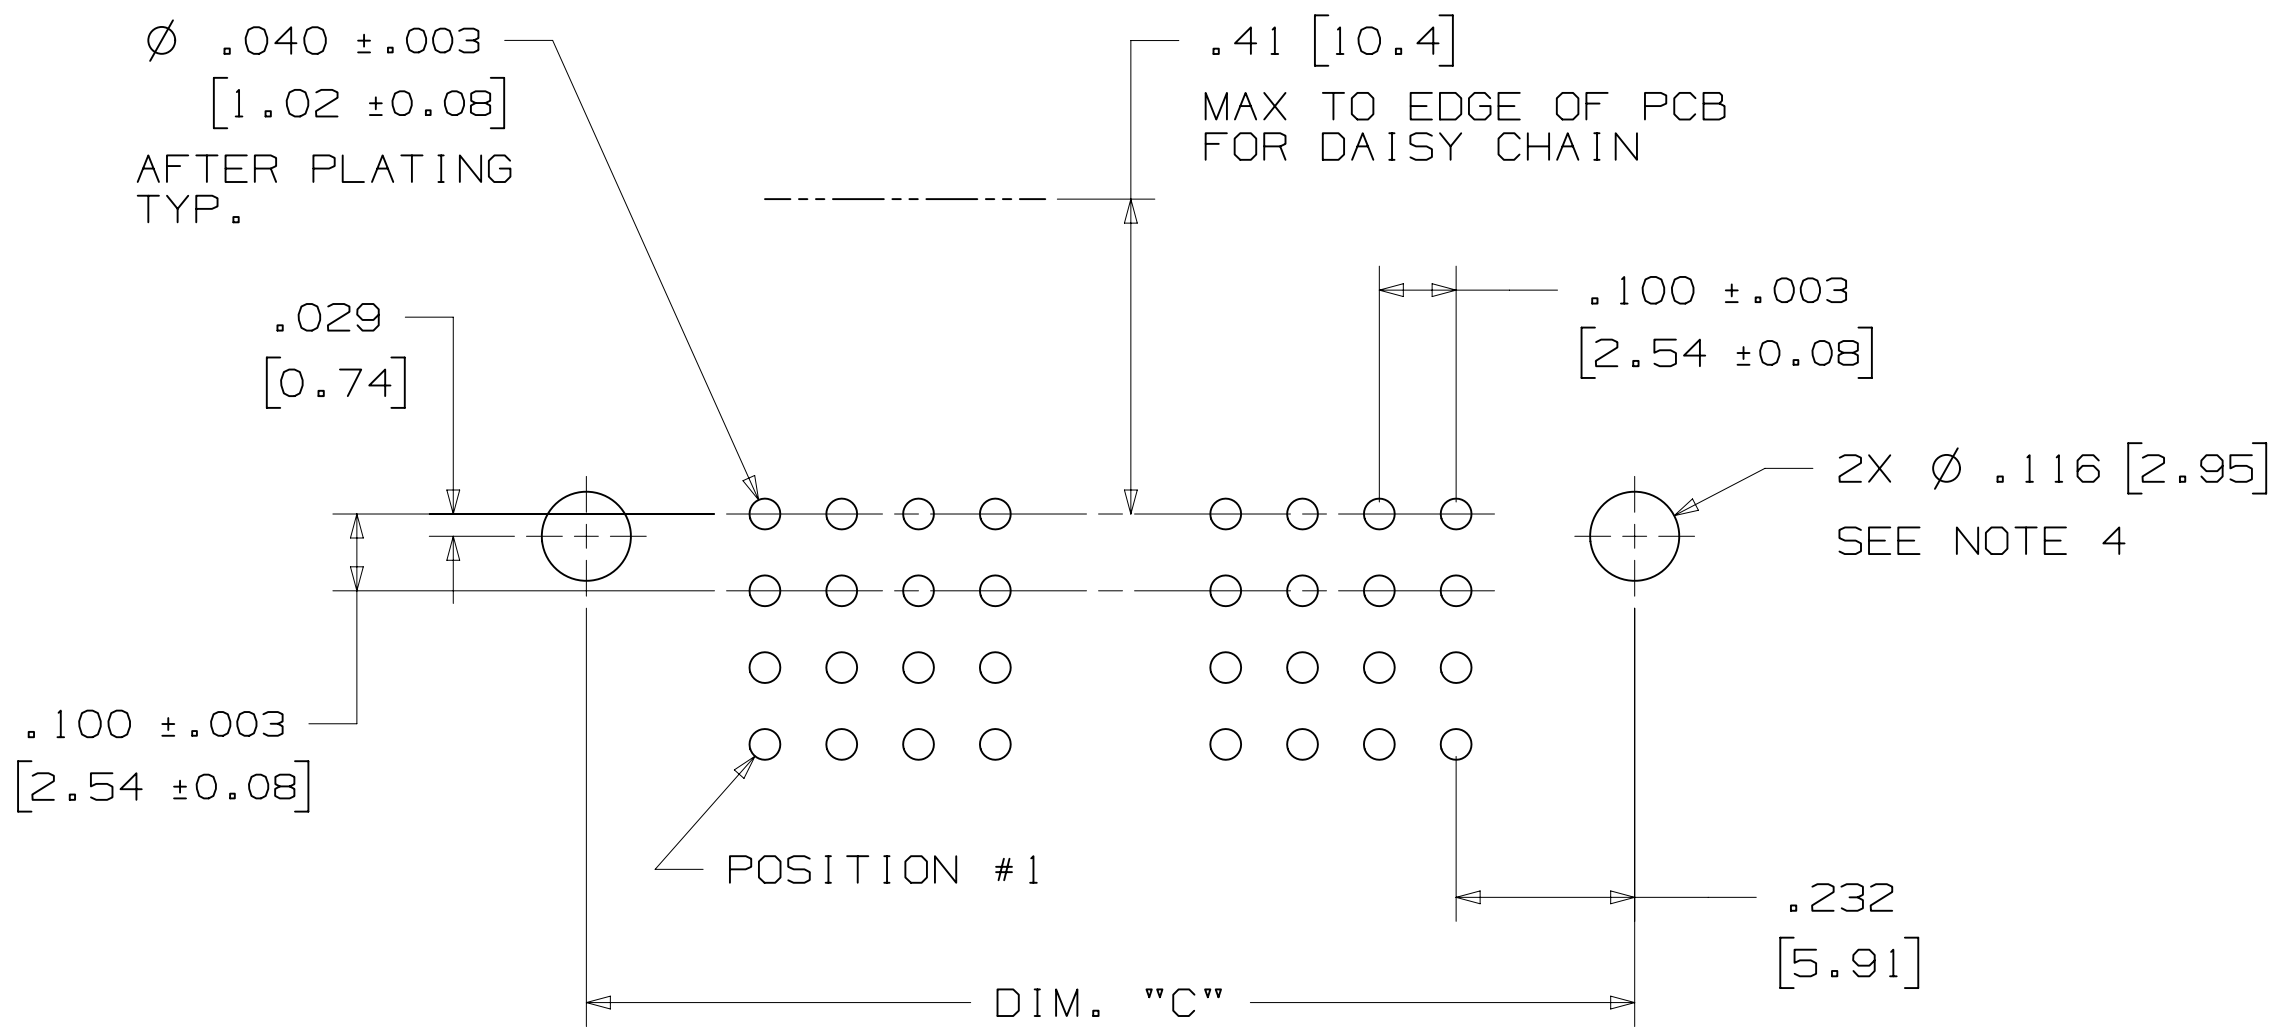

RECOMMENDED MOUNTING HOLE PATTERN


PART CUSTOMIZATION

THIS SPEC SHEET DETAILS OUR STANDARD OFFERING.


3M HAS SEVERAL CAPABILITIES THAT CAN PROVIDE A PART TAILORED TO YOUR SPECIFIC NEEDS. ASK YOUR 3M SALES REPRESENTATIVE OR CUSTOMER SERVICE FOR MORE DETAILS.

BOTH SNAP-IN AND ROLL PIN LATCHES MAY BE ORDERED SEPARATELY. SNAP-IN AND ROLL PIN STYLE LATCHES ARE DIMENSIONALLY AND FUNCTIONALLY EQUIVALENT. IF ORDERING SNAP-IN OR ROLL PIN STYLE LATCHES SEPARATELY, PLEASE USE THE BELOW CHART.

MATERIAL	SHORT LATCH	LONG LATCH	LATCH STYLE	COLOR
HIGH TEMP. (PCT)	N3505-2B	N3505-3B	ROLL PIN	BLACK
HIGH TEMP (PPA)	N3505-30B	N3505-31B	SNAP-IN	BLACK

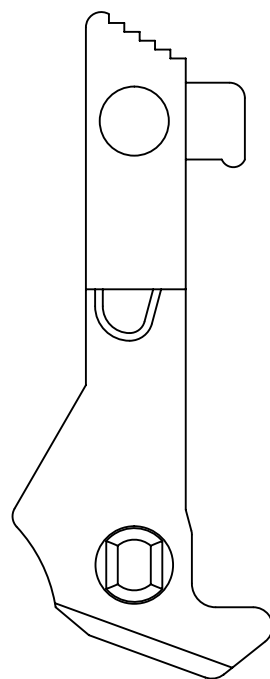


LONG

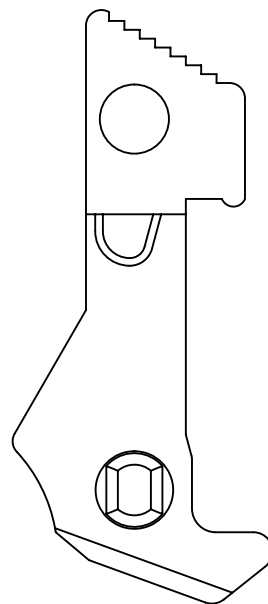


SHORT

SNAP-IN LATCHES

NOTE:
SNAP-IN LATCHES CAN ONLY BE ORDERED SEPARATELY AND ARE THE CUSTOMERS RESPONSIBILITY TO INSTALL.

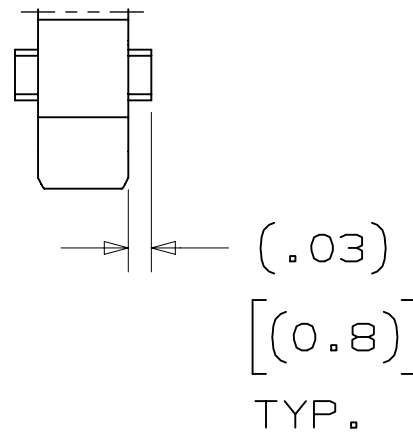


POLARIZING POST

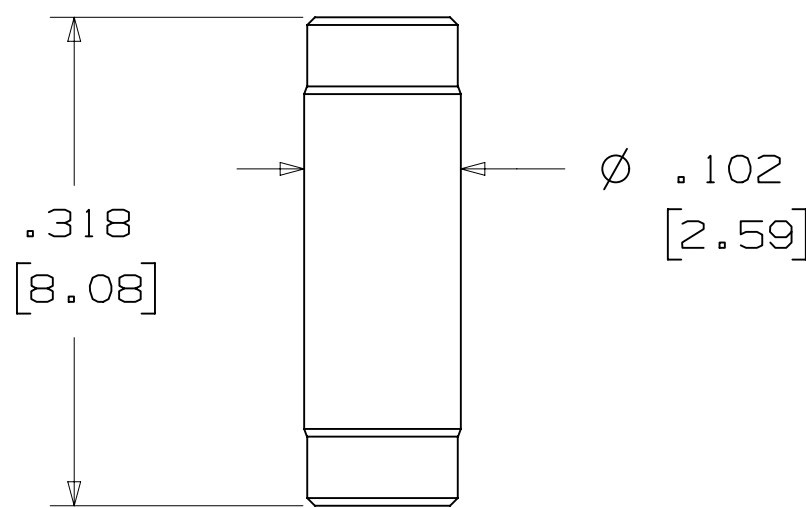

3M PART NO.	MATERIAL	COLOR
3201-4	LCP	BLACK

NOTE:
INSERT POST INTO ONE MOUNTING HARDWARE HOLE ON BOTTOM OF HEADER. SET POST TO PROTRUDE .115 [2.92]


POLARIZING KEY

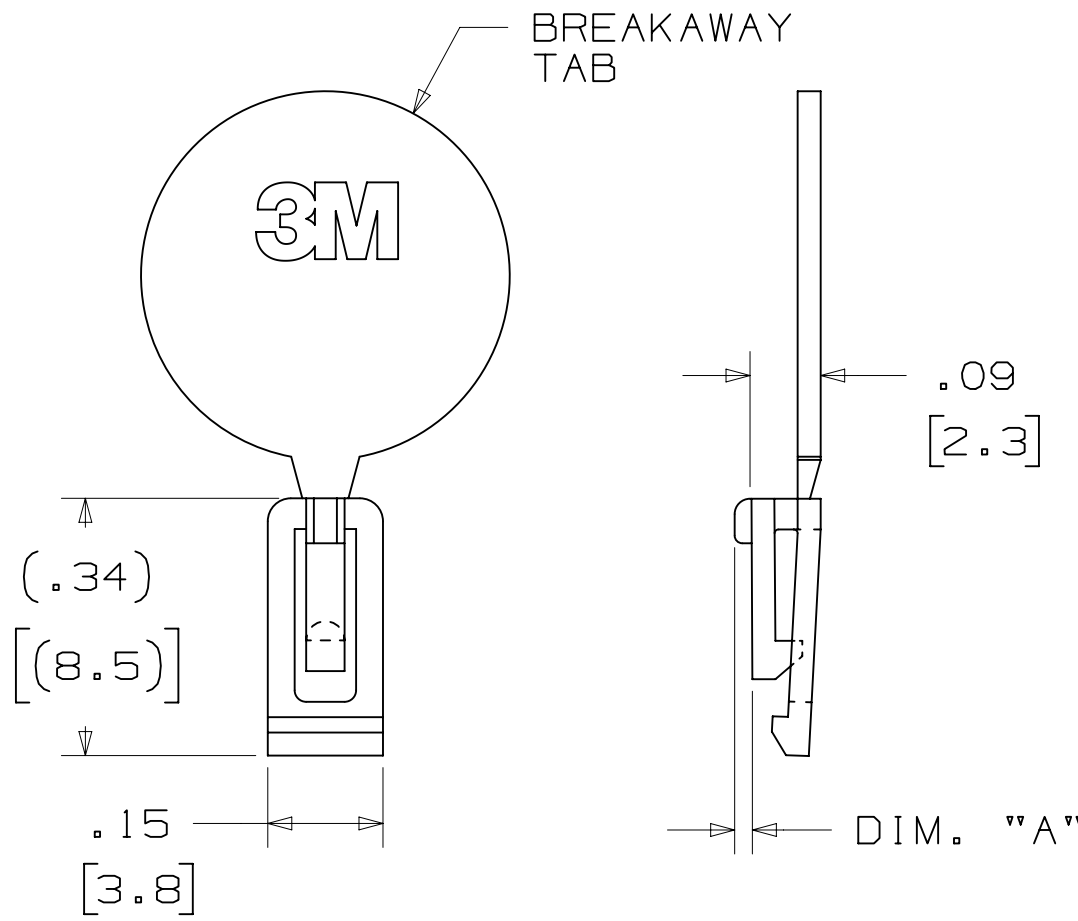

3M PART NO.	MATERIAL	COLOR	DIM. 'A'
N3518	LCP	BLACK	.02

NOTE:
#2216 B/A SCOTCHWELD CAN BE USED TO ADHERE KEYS.


MOUNTING HARDWARE

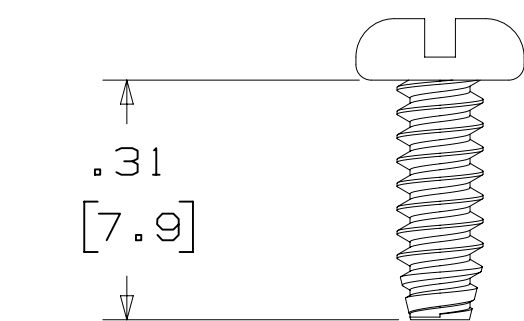

3341-5

(INSTALL FROM BOTTOM OF BOARD)

PANHEAD THREAD CUTTING SCREW:
#4-24 X 5/16"
TYPE: USA STD BT, FEDERAL BG
MATERIAL: STAINLESS STEEL

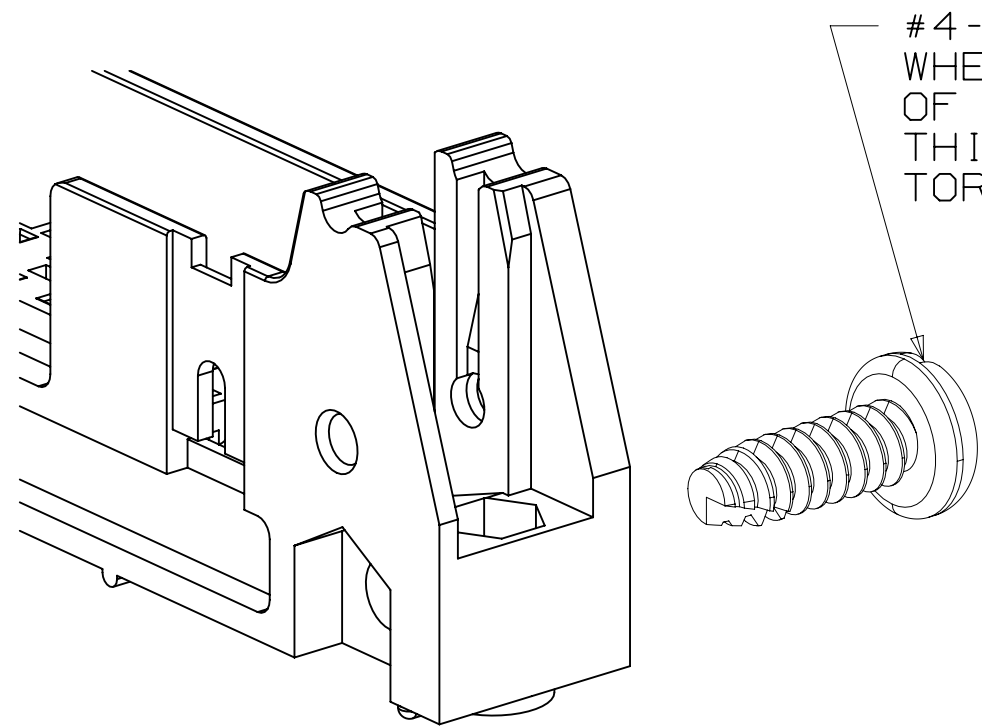

#4-24 TYPE BT SELF THREADING SCREW
WHEN USING LATCHES, MAXIMUM LENGTH
OF SCREW IS .250 INCHES PLUS
THICKNESS OF THE BOARD.
TORQUE FOR EACH SCREW IS 3-5 INCH LBS.

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED	INCHES .00 ± .01 .000 ± .005 .0000 ±	MILLIMETERS 0 ± .00 ± .13 .000 ±	INTERPRET PER ASME Y14.5 - 2009	MAX SURFACE ROUGHNESS 125 SURFACES MARKED ONLY
3M	Interconnect Solutions	EMSD	3M Center St. Paul, MN 55144	© 3M COPYRIGHT 2015 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.	TITLE	HEADER, 4-WALL, CONDO, .100 X .100 LATCH/EJECTOR, RA
CAGE NUMBER	SIZE	DRAWING NO.	REV.	MODEL	3000 SERIES	DET LISTS YES NO SHT 3 OF 3
J 56068	AUG 05, 2014	REVISED AND REDRAWN	JNC RS	SEP 05, 2014	K	
K 60056	MAR 06, 2015	REVISE ORDERING NUMBER	JNC RS			