

SHELL SIZE	A MAX	B	C	D 1.005	E DIA	F DIA	MAX NO OF ENTRIES
1	1.25	.53	.75	.984	.422	.500	1
2	1.58	.53	.75	1.312	.422	.500	1
3	2.13	.53	1.00	1.852	.422	.500	2
4	2.77	.53	1.00	2.500	.422	.500	3
5	2.68	.66	1.25	2.406	.534	.612	2
6	2.77	.73	1.25	2.500	.650	.728	2


TABLE T

TABLE I	
SYM	FINISH DESCRIPTION
M	ELECTROLESS NICKEL

TABLE T T

REVISIONS			
SYN.	DESCRIPTION	DATE	APPROVED
A	RELEASED	04/30/96	T. L.
B	REVISED PER DCN 12587	06/13/96	T. L.
C	REVISED PER DCN 12777	10/01/96	T. L.
D	REVISED PER DCN 15579	11/16/99	T. L.

REVIEWS

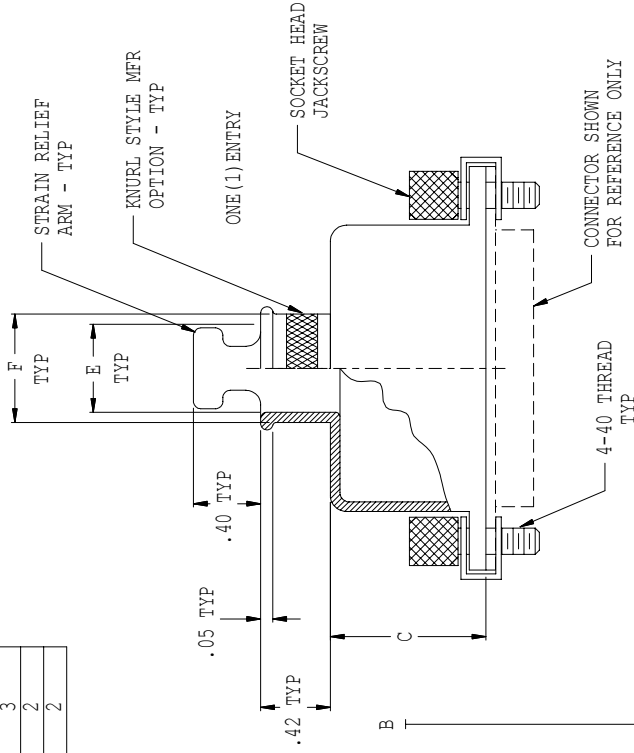

PART NUMBER DEVELOPMENT

EXAMPLE:

557 T 132 M 2-1 S L B

PRODUCT SERVICES

ENTRY LOCATION

T = TOP ENTRY

BASIC NO —

FINISH SYM, TABLE II

SHELL SIZE, TABLE I

NUMBER OF ENTRIES. SEE TABLE I

S = STRAIN RELIEF ARM

OMIT FOR NONE

L = PART SUPPLIED

LESS JACKSCREW & CLIP

R = FIXED MALES

K = FIXED MALES
P = FIXED FEMALES

N = 1 FTXD MALE & 1 FTXD FEMALE

N = 1 FIXED MALE & 1
T = TURNABLE FEMALES

I - TURNABLE FEMALES
F = 1 TURNABLE MALE & 1 TURNABLE FEMALE


Sex	Age	Turntable	Male & Female	Turntable	Female
F	1	TURNABLE	MALE & FEMALE	TURNABLE	FEMALE
RT	1	FIXED	FEMALE	TURNABLE	FEMALE

RT = 1	FIXED FEMALE	& 1	TURNABLE FEMALE
PF = 1	FIXED FEMALE	& 1	TURNABLE MALE
1	1	1	1
2	1	1	1
3	1	1	1
4	1	1	1
5	1	1	1
6	1	1	1
7	1	1	1
8	1	1	1
9	1	1	1
10	1	1	1
11	1	1	1
12	1	1	1
13	1	1	1
14	1	1	1
15	1	1	1
16	1	1	1
17	1	1	1
18	1	1	1
19	1	1	1
20	1	1	1
21	1	1	1
22	1	1	1
23	1	1	1
24	1	1	1
25	1	1	1
26	1	1	1
27	1	1	1
28	1	1	1
29	1	1	1
30	1	1	1
31	1	1	1
32	1	1	1
33	1	1	1
34	1	1	1
35	1	1	1
36	1	1	1
37	1	1	1
38	1	1	1
39	1	1	1
40	1	1	1
41	1	1	1
42	1	1	1
43	1	1	1
44	1	1	1
45	1	1	1
46	1	1	1
47	1	1	1
48	1	1	1
49	1	1	1
50	1	1	1
51	1	1	1
52	1	1	1
53	1	1	1
54	1	1	1
55	1	1	1
56	1	1	1
57	1	1	1
58	1	1	1
59	1	1	1
60	1	1	1
61	1	1	1
62	1	1	1
63	1	1	1
64	1	1	1
65	1	1	1
66	1	1	1
67	1	1	1
68	1	1	1
69	1	1	1
70	1	1	1
71	1	1	1
72	1	1	1
73	1	1	1
74	1	1	1
75	1	1	1
76	1	1	1
77	1	1	1
78	1	1	1
79	1	1	1
80	1	1	1
81	1	1	1
82	1	1	1
83	1	1	1
84	1	1	1
85	1	1	1
86	1	1	1
87	1	1	1
88	1	1	1
89	1	1	1
90	1	1	1
91	1	1	1
92	1	1	1
93	1	1	1
94	1	1	1
95	1	1	1
96	1	1	1
97	1	1	1
98	1	1	1
99	1	1	1
100	1	1	1

PF = 1 FIXED FEMALE & 1 TURNABLE MALE
OMIT FOR STANDARD TWO TURNABLE MALE

B = SUPPLIED WITH BAND 600-052

B = BOTTLED WITH BAND 000
K = COTTLED BAND. 600-052-1

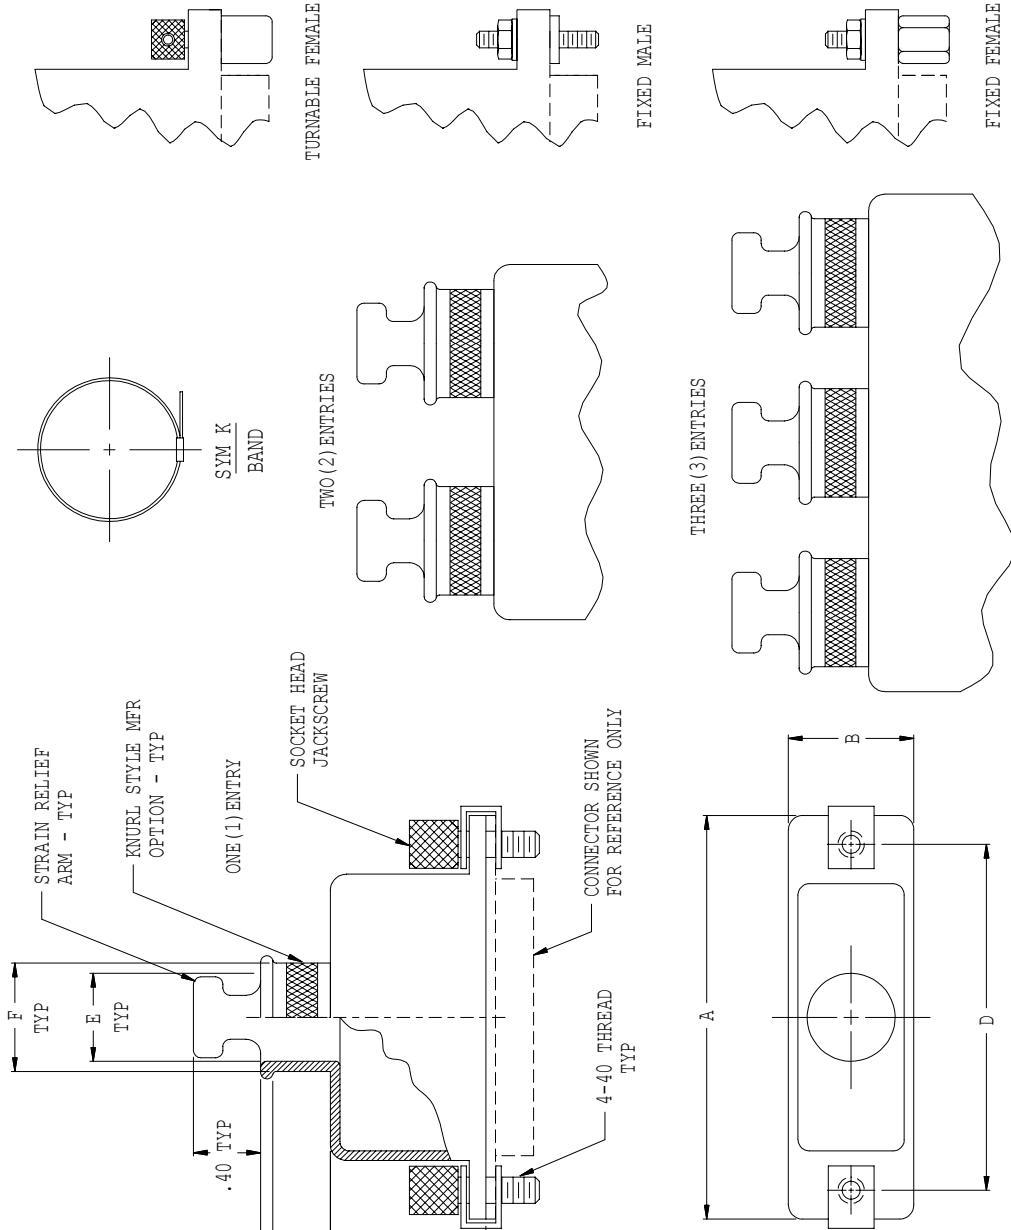A - COLLED BAI
OMTT FOR NONE

TURNABLE FEMALE

FIXED MALE

FIXED FEMALE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN	T. LE	12/27/95	GLENAIR, INC. 1211 AIR WAY - GLENDALE - CALIFORNIA 91201 BACKSHELL, RFI/EMI, QWIK-TY FOR MIL-C-24308 CONNECTORS	CAD 1999 °		
	CHECK	P. OKAKS	12/27/95				
	ENGR	R. PAINTER	12/27/95				
	TOLERANCES: FRACTIONS ± 1/16 XX ± .03 DECIMALS .XXX ± .015 ANGLES ± 2°						
DO NOT SCALE THIS DRAWING	RELEASE DATE ORIGINAL RELEASE DATE	12/28/95 		CODE IDENT. NO. 06324	SIZE C	WEIGHT N/A	SHEET 1 OF 1
E/F 1893	P/C 557			SCALE N/A	557-132	REV. D	

NOTES:

1. ASSEMBLY IDENTIFIED WITH MANUFACTURER'S NAME AND P/N,
SPACE PERMITTING.
2. MATERIAL/FINISH:
BACKSHELL - AL ALLOY/SEE TABLE II
HARDWARE - CRES/PASSIVATE