


TP-24617-000

SHT 1.1

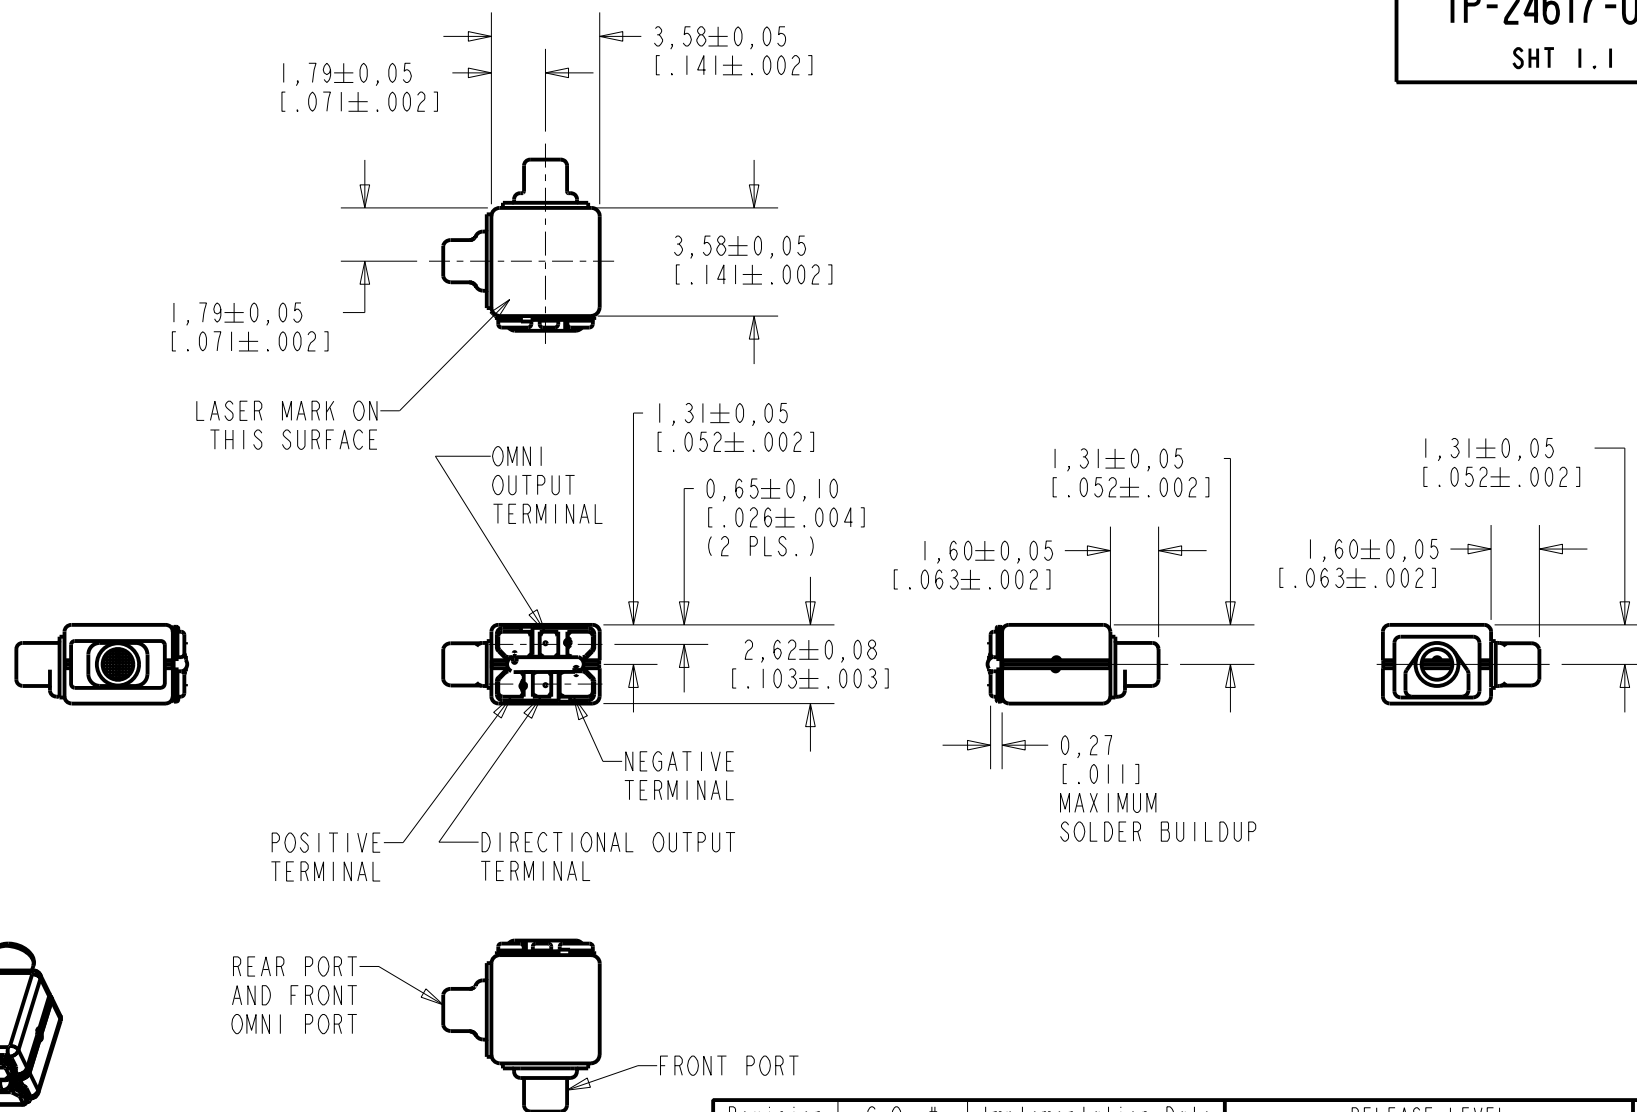

NOMINAL WEIGHT
.126 GRAMS

DIMENSIONS IN MILLIMETERS [INCHES]

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	MI0103591	5-11-10	Active	C
B	MI0100943	2-10-06		
A	MI0100740	7-27-05		

SCALE:

4:1

DO NOT SCALE DRAWING

TITLE:

MICROPHONE

OUTLINE DRAWING

TP-24617-000


SHT 1.1

DR. BY	DATE
MMM	7-27-05
CK. BY	DATE
GJP	7-28-05
APP. BY	DATE
GJP	7-28-05

KE111ASIZE.FRM

Rev: B

SENSITIVITY IN dB RELATIVE TO 1.0 VOLT/0.1 Pu (N/M²)
FOR CONDITIONS SHOWN BELOW.

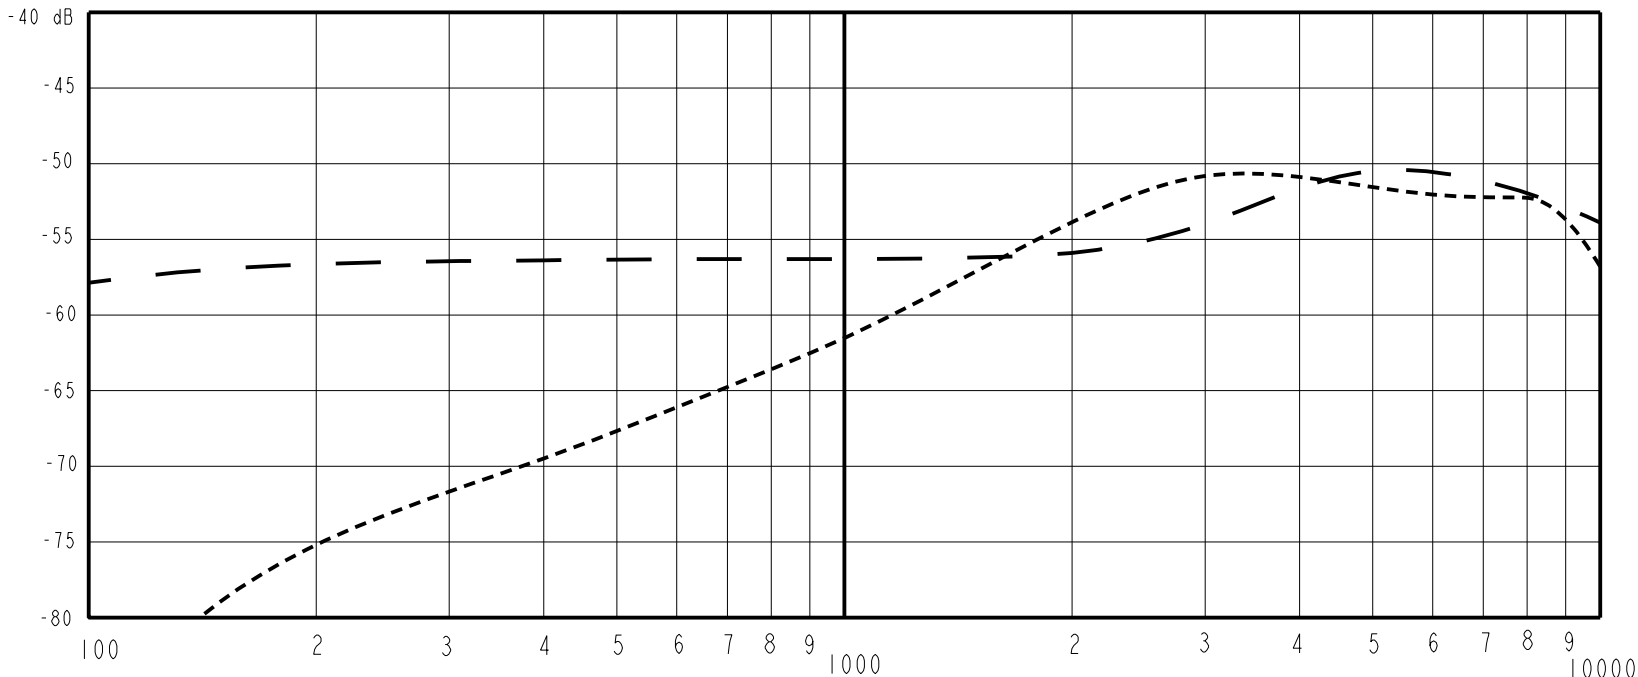



						RANGE OF DEVIATION FROM 1 KHz
OMNI DIRECTIONAL	100	---	-58.0	---	-5.0	0.0
	1000	-60.0	-57.0	-54.0	0.0	0.0
	~8500	---	-50.0	---	+4.0	+10.0
SENSITIVITY AT 1 KHz DIRECTIONAL re OMNIDIRECTIONAL						-0.5 dB -4.5 dB
DIRECTIONAL 0° ON AXIS	100	---	-70.5	---	-7.5	-13.5
	1000	-63.0	-60.0	-57.0	0.0	0.0
	~4000	---	-51.0	---	+6.0	+12.0

INTERNAL DELAY 8.3uS 10.3uS 12.3uS

- NOTES: 1. CASE CONNECTED TO NEGATIVE TERMINAL.
2. MICROPHONE TO BE FUNCTIONAL WITH 1.6 VDC SUPPLY.
3. TYPICAL SENSITIVITY TO HUMIDITY AT 1000Hz IS 0.03 dB/%RH (OMNI), 0.07 dB/%RH (DIRECTIONAL).
4. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.
5. CAPACITANCE MEASUREMENT MADE WITH BOONTON MODEL 7200 OR EQUIVALENT WITH APPLIED AC VOLTAGE OF 15 mVOLTS AT 1 MHz AND 0 VDC. INCLUDES CIRCUIT CAPACITANCE IN PARALLEL WITH CAPACITOR.
6. MICROPHONE TESTED WITH RIGHT ANGLE TUBE 1mm INTERNAL DIAMETER GIVING A PORT SPACING OF 4.5 mm (SEE DIAGRAM).

PORT LOCATION	DC SUPPLY	AMPLIFIER CURRENT DRAIN	SENSITIVITY CHANGE ON REDUCING SUPPLY TO 0.9VDC	OMNIDIRECTIONAL "A" WEIGHTED NOISE (1 kHz EQUIV. SPL)	DIRECTIONAL	OUTPUT IMPEDANCE OHMS (EACH HALF)			CAPACITANCE ±50%	
						MIN.	NOM.	MAX.	1-2 HALF	1-3 BOTH
12S, 9S	1.3V	100 µA MAX. FOR PAIR	3 dB MAX.	29.0 MAX.	-96.0 dB MAX. re MAX. re 1V	2800	4400	6800	13pF	26pF

CAPACITANCE PROBE POINTS



SCALE 4:1

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
C	M10103591	5-11-10	Active		C
B	M10100943	2-10-06			
A	M10100740	7-27-05			
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION			DR. BY	DATE	
			MMM	7-27-05	
			CK. BY	DATE	
			GJP	7-28-05	
			APP. BY	DATE	
			GJP	7-28-05	

TITLE:	MICROPHONE	TP-24617-000
	PERFORMANCE SPECIFICATION	SHT 2.1