


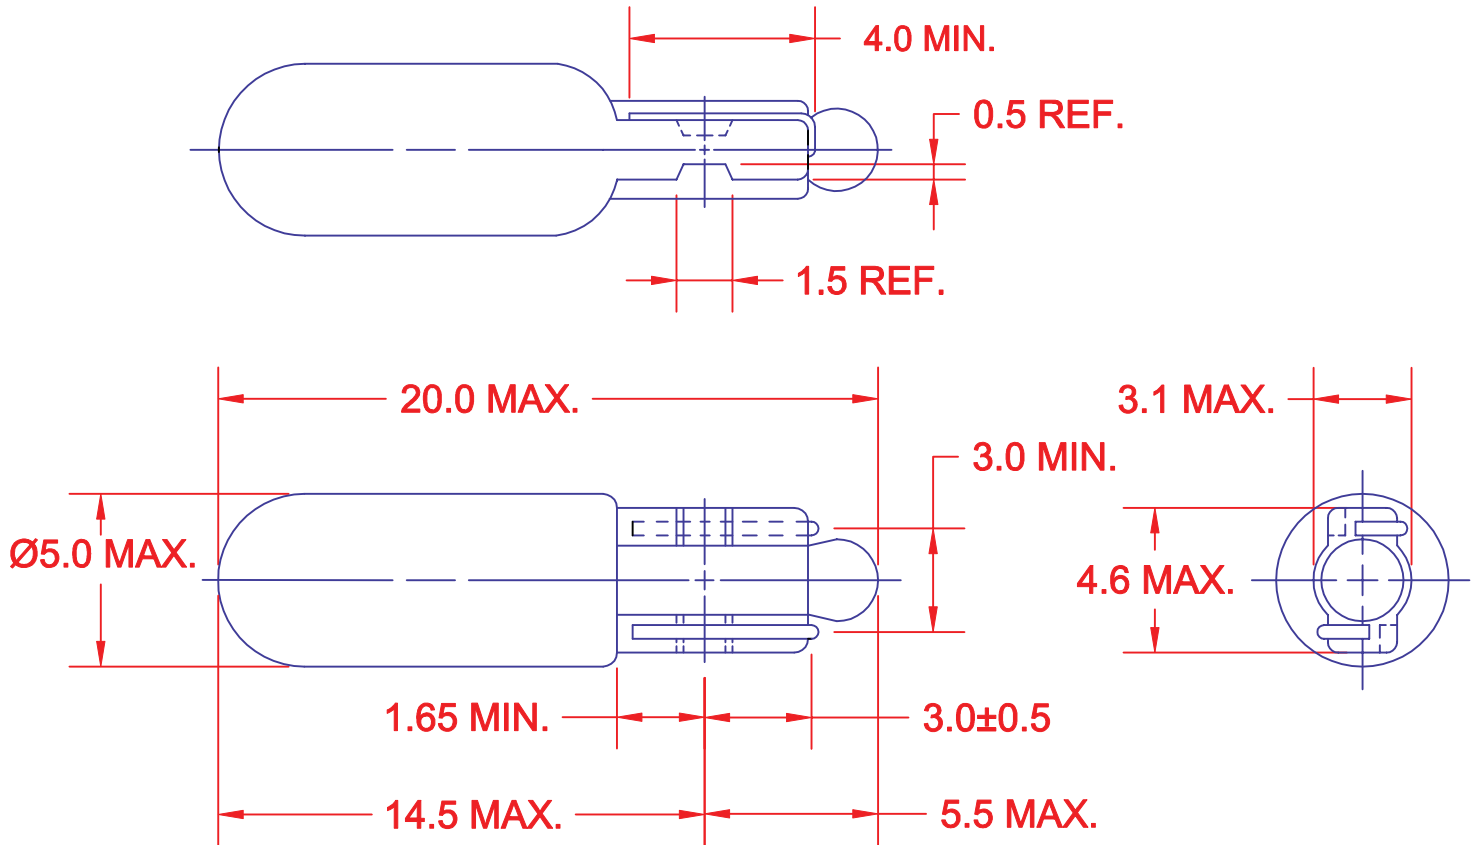

JKL LAMP NUMBER	VOLTS RATED	AMPS ±10%	MSCP ±25%	LUMENS ±25%	AVERAGE LIFE HRS.	FILAMENT TYPE
E6522	6.0	.030	.025	0.31	10,000	C-2V
E79	6.0	.200	.600	7.54	1,000	C-2R
E84	6.3	.040	.030	0.38	20,000	C-2V
E86	6.3	.200	.400	5.03	20,000	C-2V
E12522	12.0	.030	.045	0.57	10,000	C-2F
E21203A	12.0	.100	.640	8.04	2,000	C-2V
E73	14.0	.080	.300	3.77	15,000	C-2V
E37	14.0	.090	.500	6.29	1,500	C-2F
E74*	14.0	.100	.720	9.05	1,000	C-2V
E13522	24.0	.030	.160	2.01	5,000	C-2F
E85	28.0	.040	.300	3.77	10,000	C-2F
E17	28.0	.065	.650	8.17	5,000	C-2F

*PRODUCTION CHANGE TO Pb FREE GLASS, CONTACT JKL FOR LOT IDENTIFICATION.

METRIC THIRD ANGLE PROJECTION			DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0.20 ANGLE +/- 0		JKL COMPONENTS CORPORATION			
			TITLE T-1 1/2 STANDARD GLASS WEDGE BASE					
DRAWN BY L. WENGSTROM			APPVD BY DATE J.K. 8/25/04		SIZE A	FSCM NO. 55335	DRAWING NO. GLASS WEDGE BASE T-1 1/2	
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE NONE		RELEASED DATE 5/5/00	REVISION DATE 8/25/04	REV. NO. A	SHEET 1 OF 1

REV. NO.	DESCRIPTION/ECO NUMBER	APPVD DATE
A	Pb FREE NOTE ADDED	8/25/04
	RELEASED & CANCEL GW-STD-T1 1/2	5/5/00