


SEE SHEET 3 FOR
LOCATOR/HOLDDOWN
VARIATIONS


.018 [0.46]
AT TIPS
[S] C [S] D [S]
[M] A [S]

mat'l. code				surface		tolerance		projection		product family				
—				ISO 1302 ✓		ISO 406 ISO 1101				RIBCAGE				
ltr	ecn	no	dr	date		tolerances unless otherwise specified				title				
AA	M08-0245	MHT	8/27/08	angles		linear		.XX±.01/0.3				RIBCAGE III SMT VERT. HEADER ASS'Y		
AB	M09-0058	MHT	4/04/09					.XXX±.005/0.13						
AC	M09-0087	MHT	06/10/09	±2°		.XXXX±.0020/0.051		scale 3:1						
AD	N10-0174	YO	6/17/10	dr	M. CORNMAN	6/07/95								
AE	ELX-N-004143	YO	06/20/11	enrg	D. WHITING	6/07/95				dwg no		sheet 1 of 8	size	
AF	ELX-N-004665	YO	07/27/11	chr	D. WHITING	6/07/95				95781		A3		
AG	ELX-N-009746	YO	1/20/12	appd	D. WHITING	6/07/95				type		Product	Customer	Drawing
sheet	revision													
index	sheet		1	2	3	4	5	6	7	8				

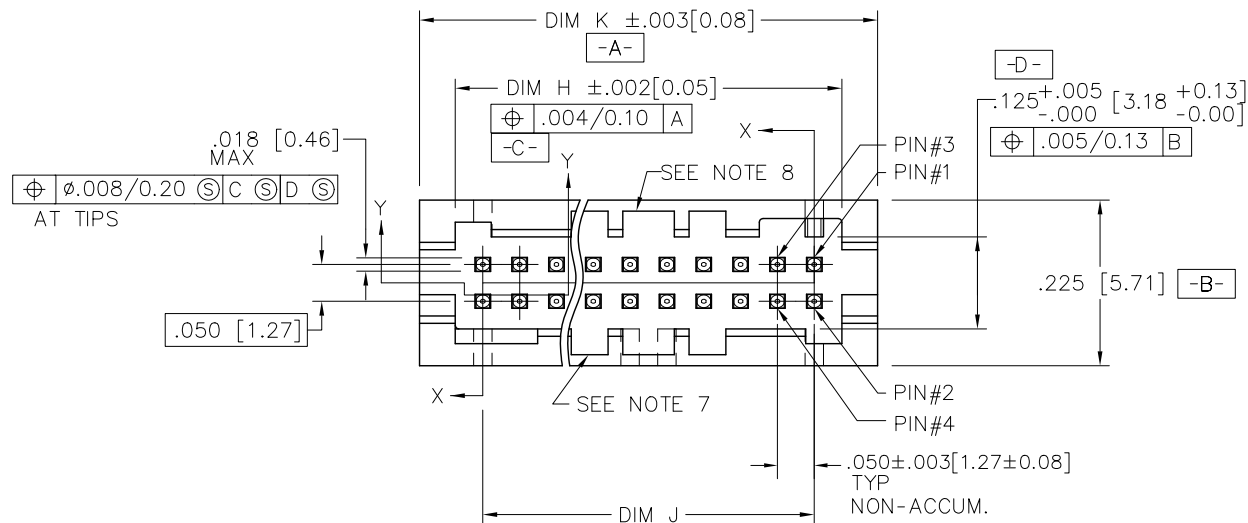


dwg no 95781 sheet 1 of 8 size A3
type Product Customer Drawing

SIZE	DIM H	DIM J	DIM K	DIM L
2X5	.275/6.99	.200/5.08	.372/9.45	.320/8.13
2X10	.525/13.34	.450/11.43	.622/15.80	.570/14.48
2X15	.775/19.68	.700/17.78	.872/22.15	.820/20.83
2X20	1.025/26.03	.950/24.13	1.122/28.50	1.070/27.18
2X25	1.275/32.38	1.200/30.48	1.372/34.85	1.320/33.53
2X30	1.525/38.74	1.450/36.83	1.622/41.20	1.570/39.88
2X35	1.775/45.08	1.700/43.18	1.872/47.55	1.820/46.23
2X40	2.025/51.43	1.950/49.53	2.122/53.90	2.070/52.58
2X45	2.275/57.78	2.200/55.88	2.372/60.25	2.320/58.93
2X50	2.525/64.14	2.450/62.23	2.622/66.60	2.570/65.28

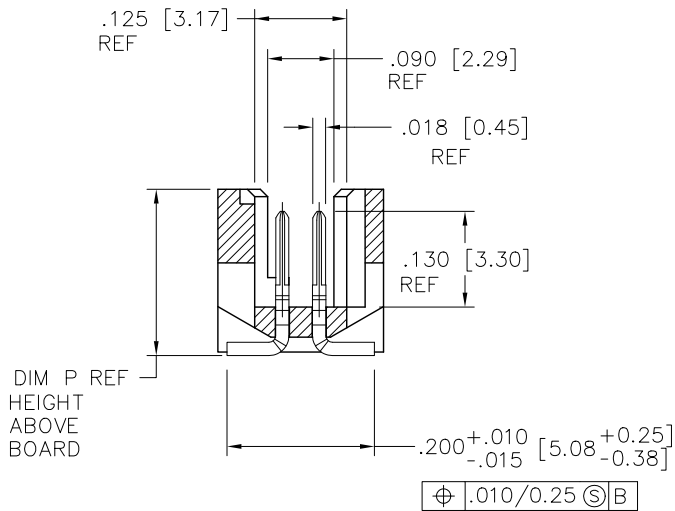




SECTION X-X
ROTATED 90° CW







SECTION Y-Y

mat'l. code —				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection INCH/MM	product family RIBCAGE			
ltr	ecn	no	dr	date	tolerances unless otherwise specified		scale 3:1	title		
AG					angles	linear		RIBCAGE III SMT VERT. HEADER ASS'Y		
					±2°	.XX±.01/0.3 .XXX±.005/0.13 .XXXX±.0020/0.051		dwg no sheet 2 of 8 size		
				dr	M. CORNMAN	6/07/95	FCI	95781 A3		
				enrg	D. WHITING	6/07/95				
				chr	D. WHITING	6/07/95				
				appd	D. WHITING	6/07/95		type Product Customer Drawing		
sheet index	revision sheet									



LOCATOR/HOLDDOWN VARIATIONS



$\phi .0520$ [1.321]
 $\phi .040$ [1.02]
 $\phi .004/0.10$ (M) A (S) B (S) (ALL PEG CONFIGURATIONS)





STYLE 5





$.0470^{+.0005}_{-.0010}$ [1.194 $^{+0.013}_{-0.025}$]
 $.0470^{+.0005}_{-.0010}$ [1.194 $^{+0.013}_{-0.025}$]
 $.040^{+.001}_{-.002}$ [1.02 $^{+0.03}_{-0.05}$]
 $.040^{+.001}_{-.002}$ [1.02 $^{+0.03}_{-0.05}$]

STYLE 6
 SEE NOTE 9



$.0520^{+.0005}_{-.0010}$ [1.321 $^{+0.013}_{-0.025}$]
 $.0520^{+.0005}_{-.0010}$ [1.321 $^{+0.013}_{-0.025}$]
 $.040^{+.001}_{-.002}$ [1.02 $^{+0.03}_{-0.05}$]
 $.040^{+.001}_{-.002}$ [1.02 $^{+0.03}_{-0.05}$]

STYLE 7




$.0065 \pm .001$ [0.165 ± 0.025]
 $\phi .0400$ [1.02]
 $.052 \pm .001$ [1.32 ± 0.025]
 R.002 [0.05] MAX

$.008$ [0.20] X 45°
 $.0520^{+.0005}_{-.0010}$ [1.321 $^{+0.013}_{-0.025}$]
 $.0030$ [0.076]
 $.040^{+.001}_{-.002}$ [1.02 $^{+0.03}_{-0.05}$]
 $.008 \pm .003$ [0.20 ± 0.08]
 $\phi .034 \pm .001$ [0.86 ± 0.03]


mat'l. code				surface	tolerance	projection	product family		
-				ISO 1302 ✓	ISO 406 ISO 1101		RIBCAGE		
ltr	ec	no	dr	date	tolerances unless otherwise specified		title		
AG					angles	linear	RIBCAGE III SMT		
					$\pm 2^\circ$	$.XX \pm .01/0.3$ $.XXX \pm .005/0.13$ $.XXXX \pm .0020/0.051$	VERT. HEADER ASS'Y		
					dr	M. CORNMAN 6/07/95	dwg no		
					enr	D. WHITING 6/07/95	sheet 3 of 8		
					chr	D. WHITING 6/07/95	95781		
					appd	D. WHITING 6/07/95	A3		
sheet index				revision	sheet		type Product Customer Drawing		

RECOMMENDED PCB MOUNTING PAD PATTERN


STYLE 1

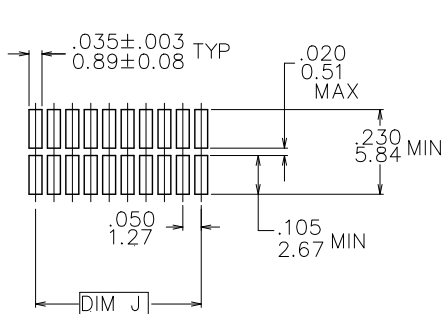


STYLE 5

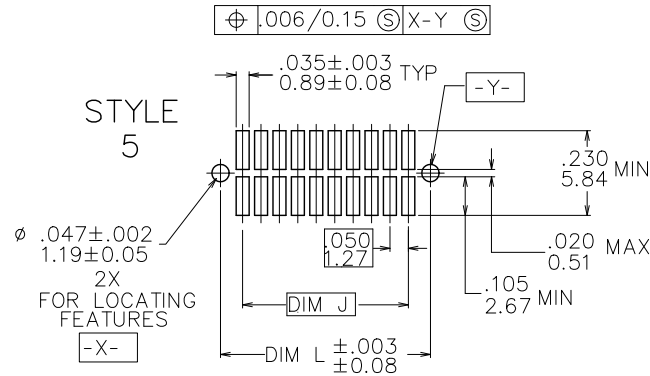


STYLE 4

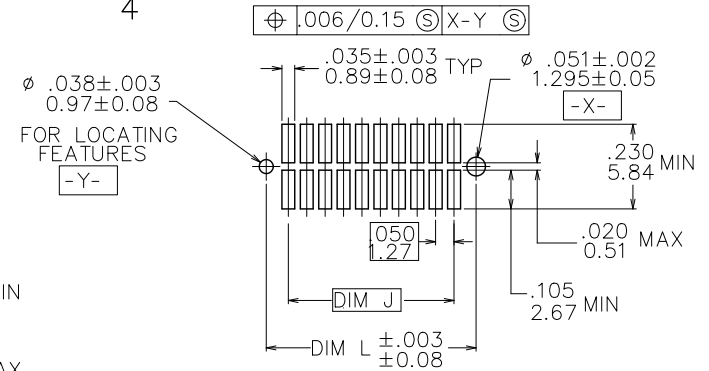


STYLE 2

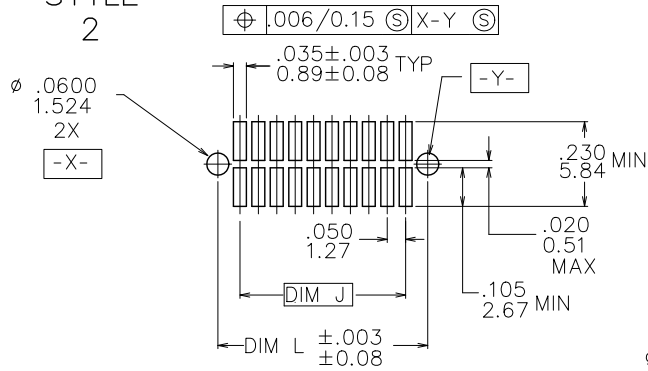


STYLE 7

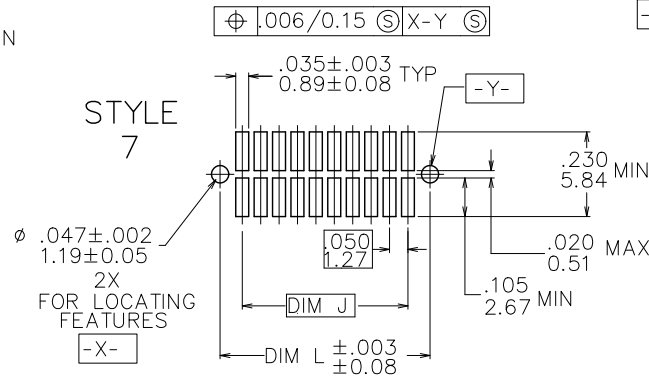


STYLE 6

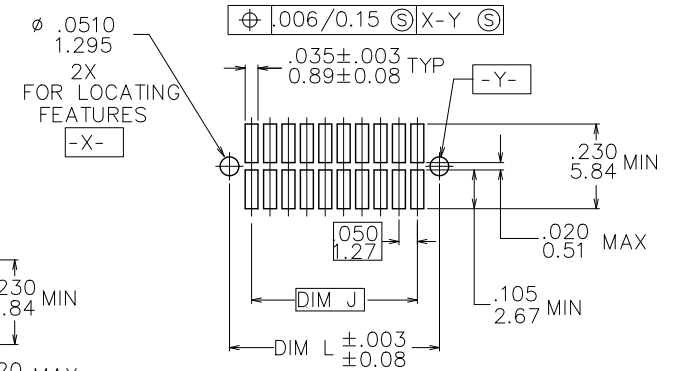

STYLE 3

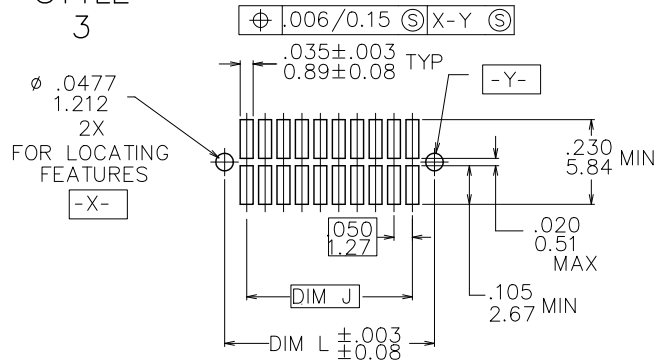

mat'l. code -				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection INCH/MM	product family RIBCAGE
ltr	ecn	no	dr	date	tolerances unless otherwise specified	scale 3:1	title RIBCAGE III SMT VERT. HEADER ASS'Y
AG					angles linear ±2'		
					dr M. CORNMAN 6/07/95	FCI	dwg no 95781 sheet 4 of 8 size A3
					enrg D. WHITING 6/07/95		
					chr D. WHITING 6/07/95		
					appd D. WHITING 6/07/95		
sheet index	revision sheet						type Product Customer Drawing

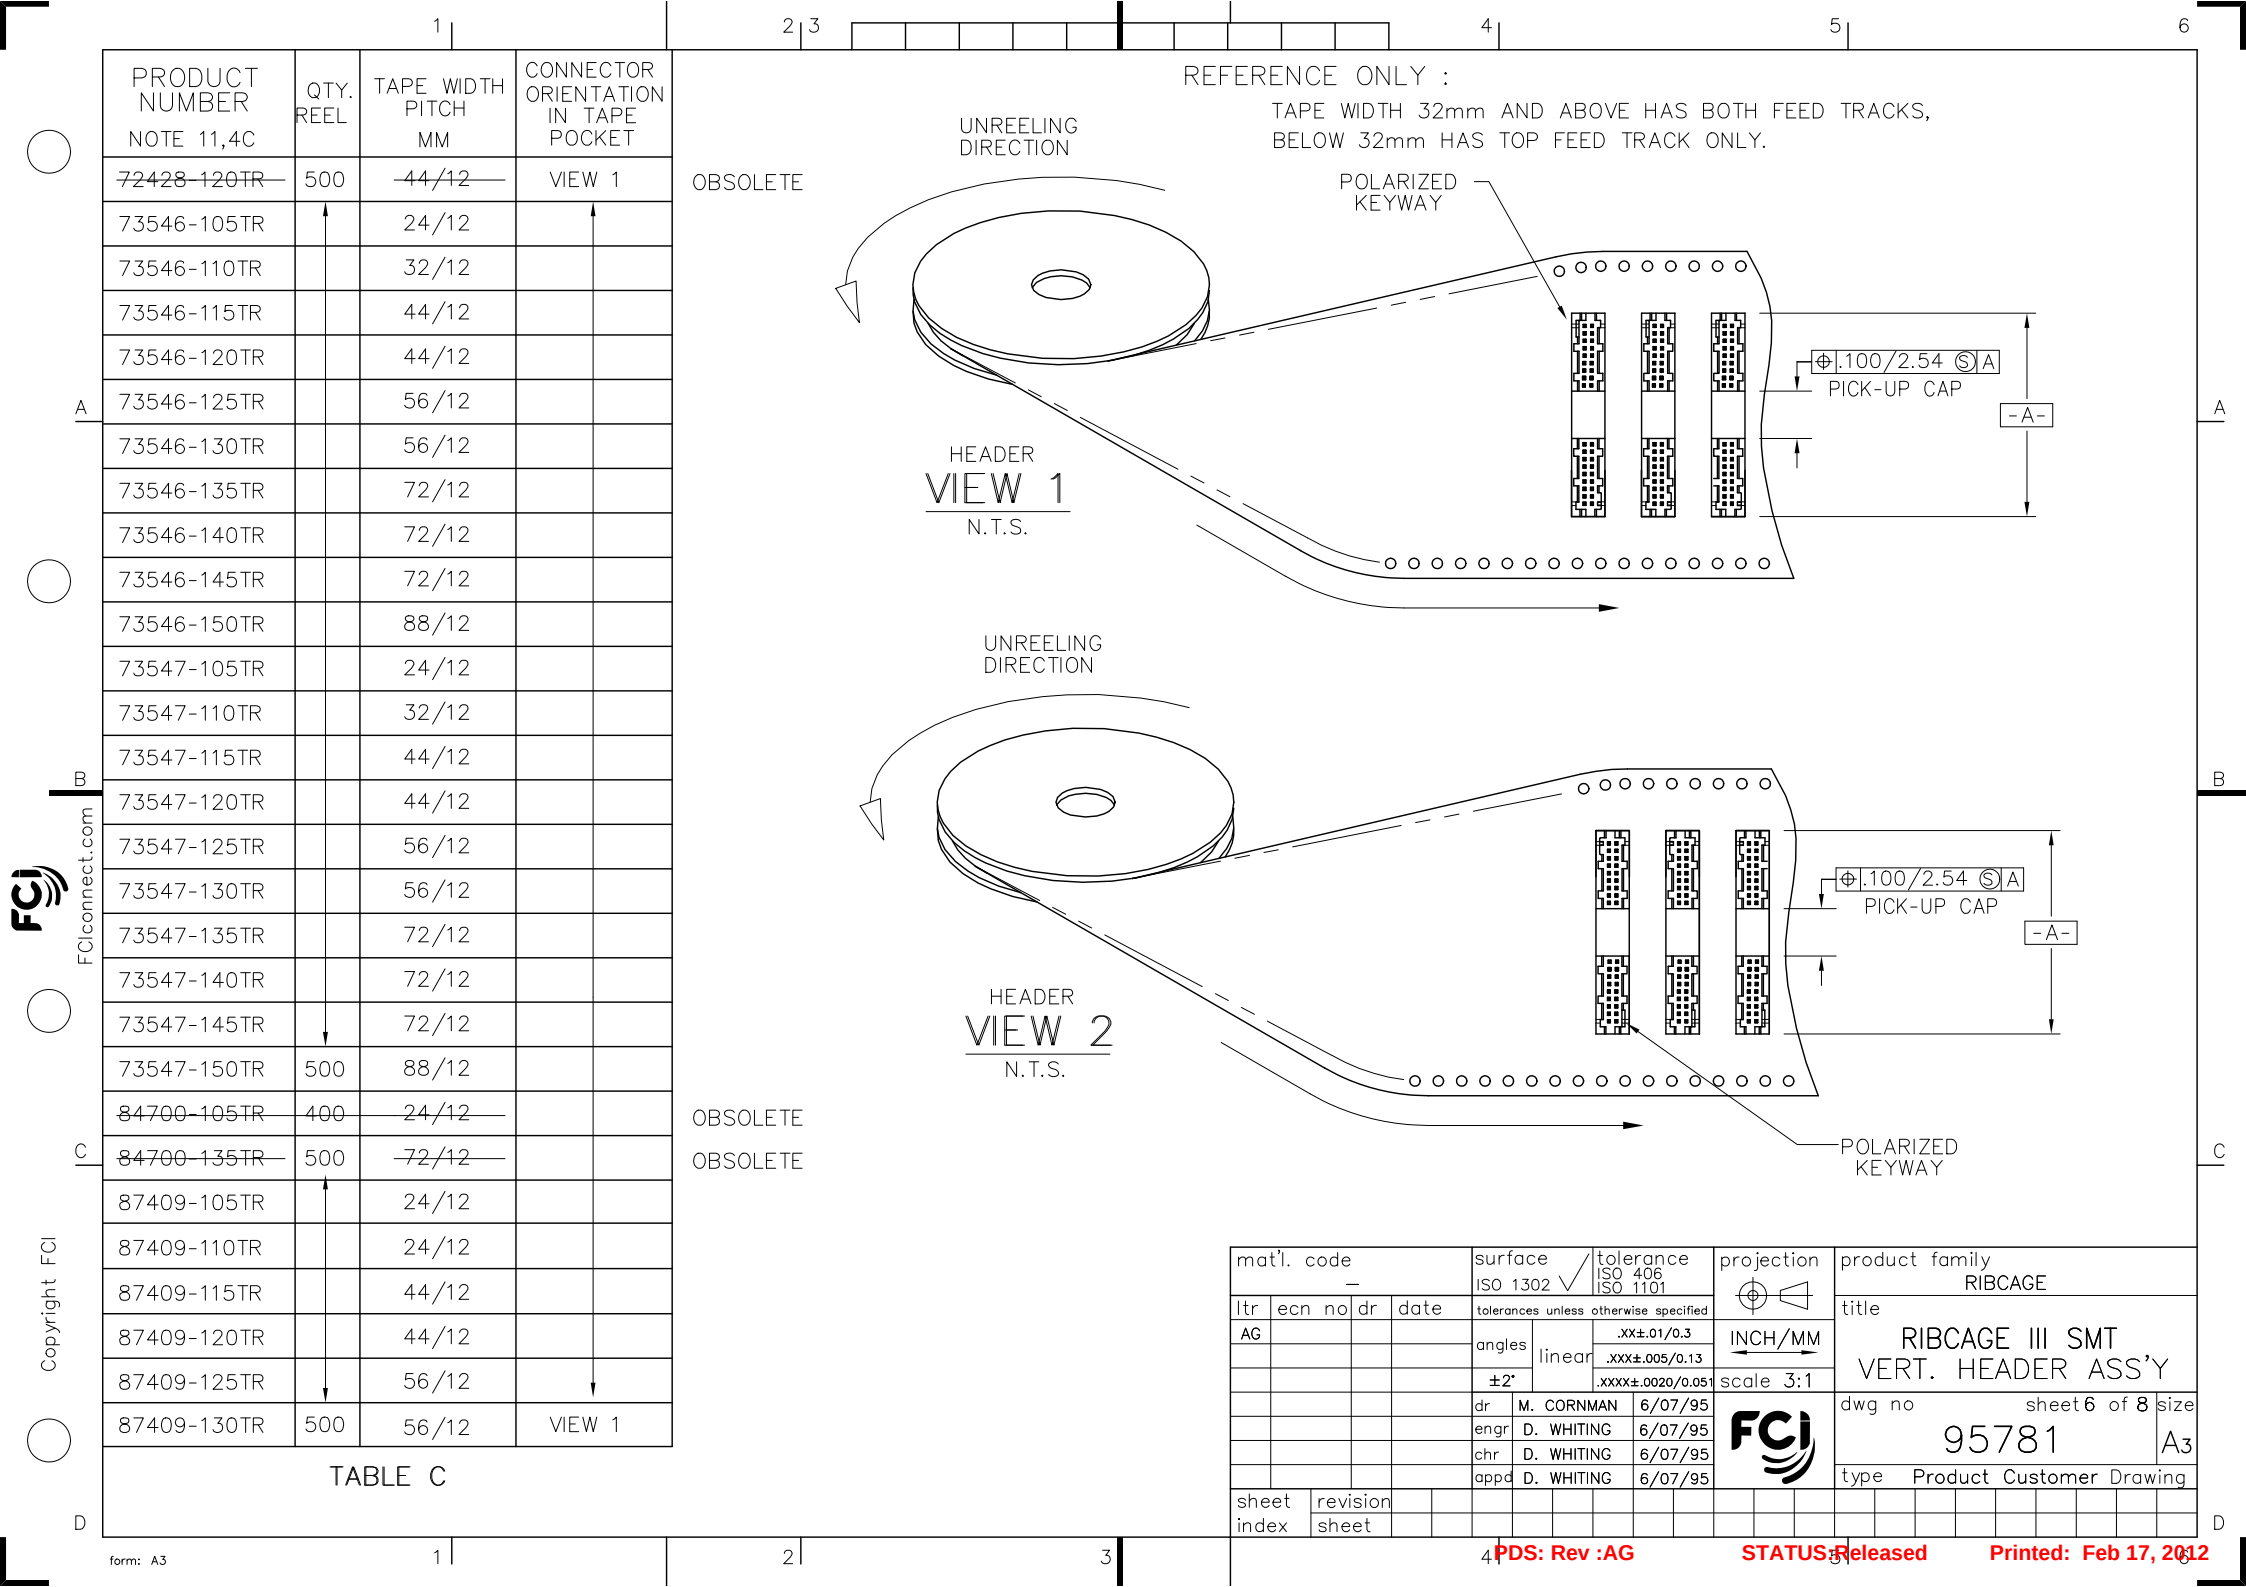

PRODUCT NUMBER NOTE 11,4C	QTY. REEL	TAPE WIDTH PITCH MM	CONNECTOR ORIENTATION IN TAPE POCKET
87409-135TR	500	72/12	VIEW 1
87409-140TR	↑	72/12	↑
87409-145TR		72/12	
87409-150TR		88/12	
87849-105TR		24/12	
87849-110TR		24/12	
87849-115TR		44/12	
87849-120TR		44/12	
87849-125TR		56/12	
87849-130TR		56/12	
87849-135TR		72/12	
87849-140TR		72/12	
87849-145TR		72/12	
87849-150TR		88/12	
88566-110TR		24/12	
88566-115TR	↓	44/12	
88566-130TR	500	56/12	
90098-105TR	400	24/12	
90098-110TR	400	32/12	
90098-115TR	500	44/12	
90098-120TR	500	44/12	
90098-125TR	400	56/12	
90098-130TR	500	56/12	
90098-135TR	↑	72/12	
90098-140TR		72/12	
90098-145TR		72/12	
90098-150TR		88/12	
90863-110	↓	24/12	↓
90863-115	500	44/12	VIEW 1

TABLE C

mat'l. code —				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family RIBCAGE							
ltr	ecn no	dr	date	tolerances unless otherwise specified							title RIBCAGE III SMT VERT. HEADER ASS'Y						
AG				angles		linear		.XX±.01/0.3 .XXX±.005/0.13 .XXXX±.0020/0.051									
				±2'						dwg no		sheet 7 of 8				size	
				enrg		D. WHITING		6/07/95		95781						A3	
				chr		D. WHITING		6/07/95									
				appd		D. WHITING		6/07/95									
sheet index		revision sheet															

PRODUCT NUMBER NOTE 11,4C	QTY. REEL	TAPE WIDTH PITCH MM	CONNECTOR ORIENTATION IN TAPE POCKET
90863-115REV	500	44/12	VIEW 2
90863-120	↑	44/12	VIEW 1
90863-125		56/12	↑
90863-130		56/12	
91036-110P		24/16	
93206-110TR	↓	24/12	
93206-115TR	500	44/12	
93221-105TR	400	24/12	
93221-110TR	400	32/12	
93221-115TR	500	44/12	
93221-120TR	500	44/12	
93221-125TR	400	56/12	
93221-130TR	500	56/12	
93221-135TR	↑	72/12	
93221-140TR		72/12	
93221-145TR	↓	72/12	↓
93221-150TR	500	88/12	VIEW 1

TABLE C

NOTES:

- ① XXXXX-XXXLF
LEAD FREE OPTION (NOTE 11& 13)
NUMBER OF POSITIONS (NOTE 2)
2. NUMBER OF POSITIONS = 05 THRU 50 IN 5 POS INCREMENTS.
(EXAMPLE : 105=10 POS., 110=20 POS. ETC.)
- ③ REQUIRED ON -X40,-X45 & -X50 POSITION PARTS ONLY.
- ④ PACKAGING :
A. ANTISTATIC TUBES. SEE TABLE A
B. ADD "CT" TO END OF DASH NUMBER FOR CONNECTOR
WITH VACUUM CAP IN ANTISTATIC TUBES.
EX. : XXXXX-1XXCT
C. PRESSURE SEALED TAPE AND REEL. SEE TABLE C
FOR AVAILABLE PART NUMBERS.
5. HOUSING MATERIAL :
GLASS FILLED THERMOPLASTIC FLAME RETARDANT PER UL 94V-0.
COLOR : NATURAL
6. TERMINAL PLATING :
30u"/.76u HARD GOLD OR GXT OVER 50u"/1.27u NI ON CONTACT ZONES.
100u"/2.54u PURE TIN OVER 50u"/1.27u Ni IN SOLDERING ZONES.
- ⑦ MOLDING FLOW RESTRICTOR QUANTITY AND LOCATION IS
MANUFACTURING OPTION.
- ⑧ VACUUM CAP SLOT REQUIRED ON ALL SIZES, SLOT MAY
BE LOCATED ON OPPOSITE SIDE FOR 2 X 5.
- ⑨ STYLE 6 IS NOT AVAILABLE IN TAPE AND REEL.
- ⑩ 90863-1XX IS PACKAGED ONLY IN TAPE AND REEL.
- ⑪ ADD LF SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
12. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
FOR 20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW
OVEN. SEE APPLICATION NOTE/PROCEDURES IF THEY ARE AVAILABLE.
13. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
14. PRODUCT SPECIFICATION SEE BUS-12-087.

mat'l. code —				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection INCH/MM		product family RIBCAGE			
litr		ecn no		dr		date		tolerances unless otherwise specified		title			
AG								.XX±.01/0.3		RIBCAGE III SMT			
								.XXX±.005/0.13		VERT. HEADER ASS'Y			
								±2'		.XXXX±.0020/0.051			
								dr		M. CORNMAN 6/07/95			
								enrg		D. WHITING 6/07/95			
								chr		D. WHITING 6/07/95			
								appd		D. WHITING 6/07/95			
sheet		revision								dwg no			
index		sheet								sheet 8 of 8 size			
										95781 A3			
										type Product Customer Drawing			