

EMC Components

ACM2012D/H Series

Common Mode Choke Coils for Signal Line SMD

FEATURES

- These are a series of broadband common mode filters developed for high-speed differential signal interfaces, such as DVI and HDMI™.
- The cutoff frequencies in differential mode for ACM2012D and ACM2012H are 3.5GHz and 6.0GHz respectively, so they do not interfere with high-speed differential signals.
- The characteristic impedance is approximated to 100Ω, conforming to the TDR standard for HDMI™.

APPLICATIONS


- For new HDMI™ interfaces used in digital video devices:
ACM2012H is suited for use on the transmission side (Source) of digital TVs, DVD recorders and liquid crystal projectors.
ACM2012D is suited for use on the receiving side (Sink).
- For digital video signal interfaces DVI (UXGA) used in PCs and other devices/High-speed differential signal interfaces for USB 2.0, IEEE 1394 and Serial-ATA.

PRODUCT IDENTIFICATION


ACM	2012	D	- 900	- 2P	- □
(1)	(2)	(3)	(4)	(5)	(6)

- (1) Series name
(2) Dimensions L×W
2012: 2.0×1.2mm
(3) Product identification number (D or H)
(4) Impedance[at 100MHz]
900: 90Ω
(5) Number of line
2P: 2-line
(6) Packaging style
T: ø180mm reel taping
TL: ø330mm reel taping
B: Bulk


SHAPES AND DIMENSIONS

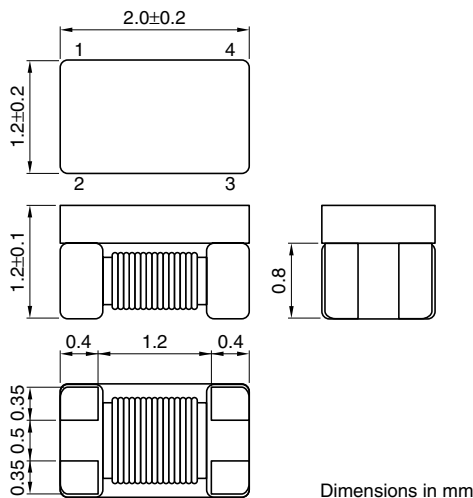

CIRCUIT DIAGRAM



RECOMMENDED PC BOARD PATTERNS

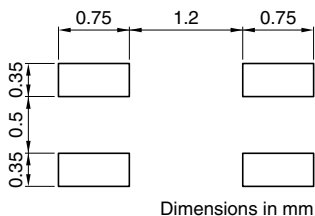

• HDMI™ is trademark of HDMI Licensing, LLC.

• All specifications are subject to change without notice.

EMC Components

ACM2012D/H Series

Common Mode Choke Coils for Signal Line SMD

ELECTRICAL CHARACTERISTICS

Part No.	Impedance (Ω) [at 100MHz]	DC resistance (Ω) [1 line]	Rated current Idc (mA)	Rated voltage Edc (V)	Insulation resistance (M Ω)	Cut-off frequency (GHz)	Characteristic impedance (Ω)
ACM2012D-900-2P-□*	65min.(90typ.)	0.30max.	300max.	20max.	10min.	3.5typ.	100typ.
ACM2012H-900-2P-□	65min.(90typ.)	0.30max.	300max.	20max.	10min.	6typ.	100typ.


* □ : Packaging style (T: ϕ 180mm reel/ TL: ϕ 330mm reel/ B: Bulk)

• -25 to +85°C


TYPICAL ELECTRICAL CHARACTERISTICS

IMPEDANCE vs. FREQUENCY CHARACTERISTICS(REFERENCE)


ACM2012D-900-2P

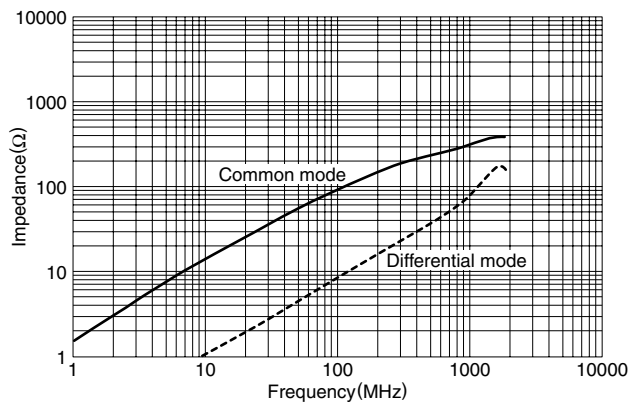

ACM2012H-900-2P

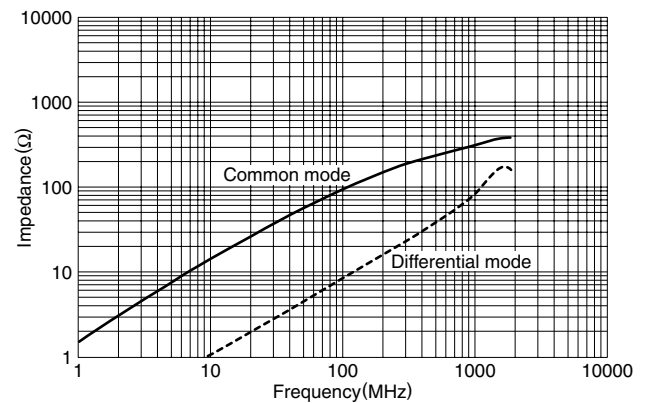

INSERTION LOSS vs. FREQUENCY CHARACTERISTICS (REFERENCE)

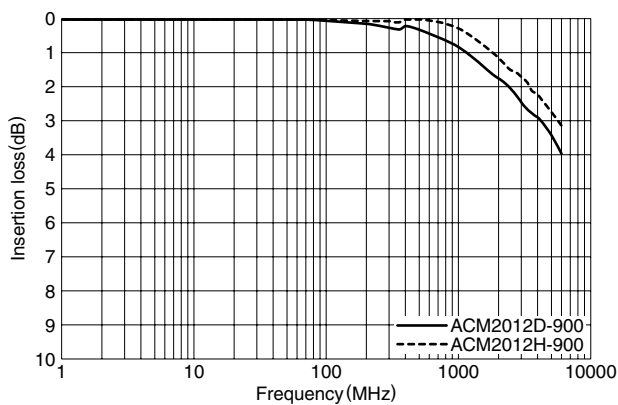

CHARACTERISTIC IMPEDANCE MEASURED ACCORDING TO TDR(REFERENCE)

