


ULTRA LOW DROP-LOW NOISE BICMOS VOLTAGE REGULATORS LOW ESR CAPACITORS COMPATIBLE

- INPUT VOLTAGE FROM 2.5V TO 6V
- STABLE WITH LOW ESR CERAMIC CAPACITORS
- ULTRA LOW DROPOUT VOLTAGE (100mV TYP. AT 150mA LOAD, 0.4mV TYP. AT 1mA LOAD)
- VERY LOW QUIESCENT CURRENT (85 μ A TYP. AT NO LOAD, 170 μ A TYP. AT 150mA LOAD; MAX 1.5 μ A IN OFF MODE)
- GUARANTEED OUTPUT CURRENT UP TO 150mA
- WIDE RANGE OF OUTPUT VOLTAGE: 1.25V; 1.35; 1.5; 1.8V; 2V; 2.1V; 2.2V; 2.4V; 2.5V; 2.6V; 2.7V; 2.8V; 2.85V; 2.9V; 3V; 3.1V; 3.2V; 3.3V; 4.7V; 5V
- FAST TURN-ON TIME: TYP. 200 μ s [C_O=1 μ F, C_{BYP}= 10nF AND I_O=1mA]
- LOGIC-CONTROLLED ELECTRONIC SHUTDOWN
- INTERNAL CURRENT AND THERMAL LIMIT
- OUTPUT LOW NOISE VOLTAGE 30 μ VRMS OVER 10Hz to 100KHz
- S.V.R. OF 60dB AT 1KHz, 50dB AT 10KHz
- TEMPERATURE RANGE: -40°C TO 125°C


DESCRIPTION

The LD3985 provides up to 150mA, from 2.5V to 6V input voltage.

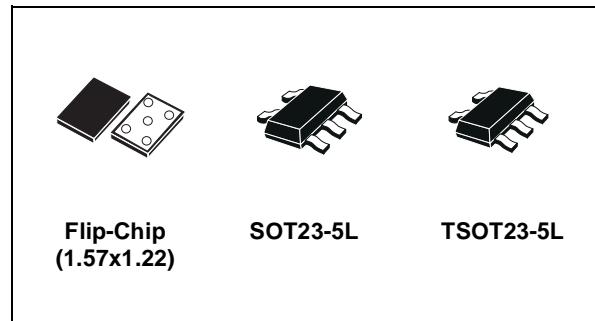

The ultra low drop-voltage, low quiescent current and low noise make it suitable for low power applications and in battery powered systems. Regulator ground current increases only slightly in dropout, further prolonging the battery life. Power supply rejection is better than 60 dB at low frequencies and starts to roll off at 10KHz. High power supply rejection is maintained down to low input voltage levels common to battery operated circuits. Shutdown Logic Control function is available, this means that when the device is used as local regulator, it is possible to put a part of the board in standby, decreasing the total power consumption. The LD3985 is designed to work with low ESR ceramic capacitors. Typical applications are in mobile phone and similar battery powered wireless systems.

SCHEMATIC DIAGRAM

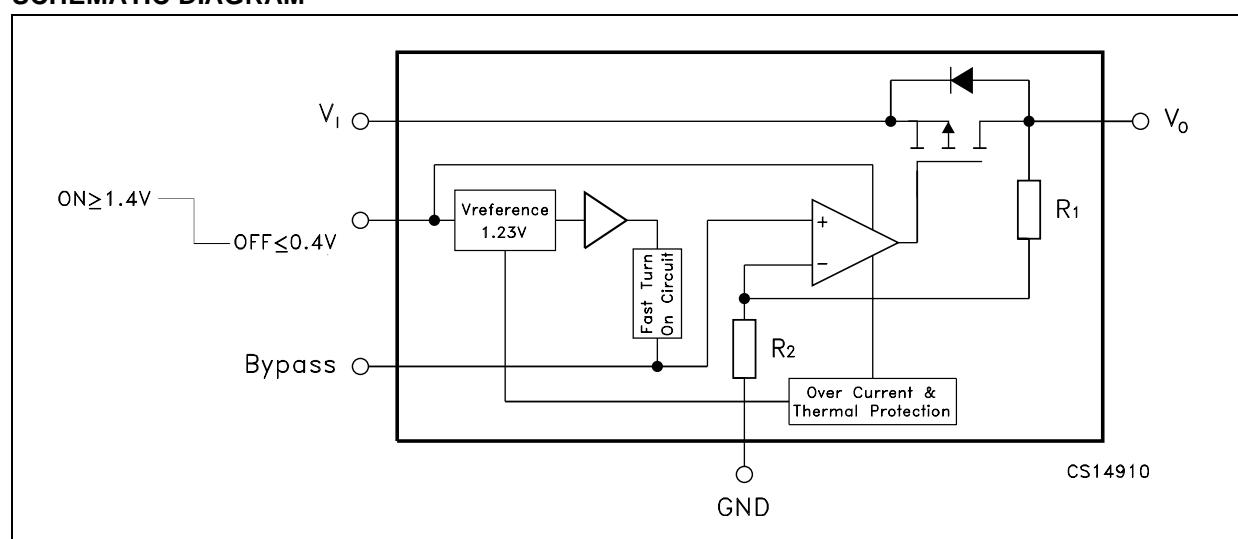

LD3985 SERIES

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_I	DC Input Voltage	-0.3 to 6 (*)	V
V_O	DC Output Voltage	-0.3 to $V_I+0.3$	V
V_{INH}	INHIBIT Input Voltage	-0.3 to $V_I+0.3$	V
I_O	Output Current	Internally limited	
P_D	Power Dissipation	Internally limited	
T_{STG}	Storage Temperature Range	-65 to 150	°C
T_{OP}	Operating Junction Temperature Range	-40 to 125	°C


Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

(*) The input pin is able to withstand non repetitive spike of 6.5V for 200ms.

THERMAL DATA

Symbol	Parameter	SOT23-5L/ TSOT23-5L	Flip-Chip	Unit
$R_{thj-case}$	Thermal Resistance Junction-case	81		°C/W
$R_{thj-amb}$	Thermal Resistance Junction-ambient	255	170	°C/W

CONNECTION DIAGRAM (top view for SOT and TSOT, top through view for Flip-Chip)

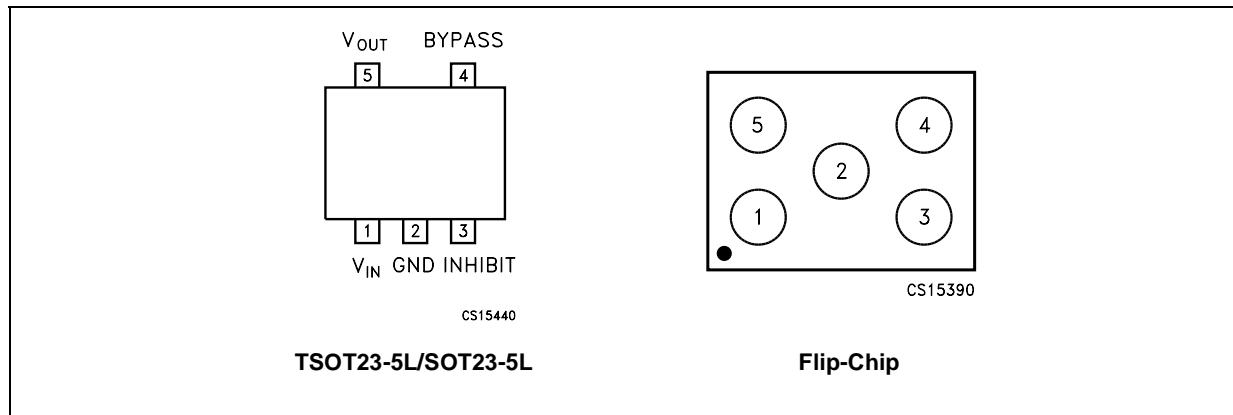

PIN DESCRIPTION


Pin N° SOT23-5L/ TSOT235L	Pin N° Flip-Chip	Symbol	Name and Function
1	4	V_I	Input Voltage of the LDO
2	2	GND	Common Ground
3	1	V_{INH}	Inhibit Input Voltage: ON MODE when $V_{INH} \geq 1.2V$, OFF MODE when $V_{INH} \leq 0.4V$ (Do not leave floating, not internally pulled down/up)
4	5	BYPASS	Bypass Pin: Connect an external capacitor (usually 10nF) to minimize noise voltage
5	3	V_O	Output Voltage of the LDO

ORDERING CODES

SOT23-5L	TSOT23-5L	Flip-Chip	OUTPUT VOLTAGES
LD3985M125 (*)	LD3985G125 (*)	LD3985J125	1.25 V
LD3985M135 (*)	LD3985G135 (*)	LD3985J135	1.35 V
LD3985M15 (*)	LD3985G15 (*)	LD3985J15	1.5 V
LD3985M18 (*)	LD3985G18 (*)	LD3985J18	1.8 V
LD3985M20 (*)	LD3985G20 (*)	LD3985J20	2.0 V
LD3985M21 (*)	LD3985G21 (*)	LD3985J21	2.1 V
LD3985M22 (*)	LD3985G22 (*)	LD3985J22	2.2 V
LD3985M24 (*)	LD3985G24 (*)	LD3985J24	2.4 V
LD3985M25 (*)	LD3985G25 (*)	LD3985J25	2.5 V
LD3985M26 (*)	LD3985G26 (*)	LD3985J26	2.6 V
LD3985M27 (*)	LD3985G27	LD3985J27	2.7 V
LD3985M28 (*)	LD3985G28 (*)	LD3985J28	2.8 V
LD3985M285 (*)	LD3985G285 (*)	LD3985J285	2.85 V
LD3985M29 (*)	LD3985G29	LD3985J29	2.9 V
LD3985M30 (*)	LD3985G30 (*)	LD3985J30	3.0 V
LD3985M31 (*)	LD3985G31 (*)	LD3985J31	3.1 V
LD3985M32 (*)	LD3985G32 (*)	LD3985J32	3.2 V
LD3985M33 (*)	LD3985G33 (*)	LD3985J33	3.3 V
LD3985M47 (*)	LD3985G47 (*)	LD3985J47	4.7 V
LD3985M48 (*)	LD3985G48 (*)	LD3985J48	4.8 V
LD3985M49 (*)	LD3985G49 (*)	LD3985J49	4.9 V
LD3985M50 (*)	LD3985G50 (*)	LD3985J50	5.0 V

(*) Available on request.

TYPICAL APPLICATION CIRCUIT

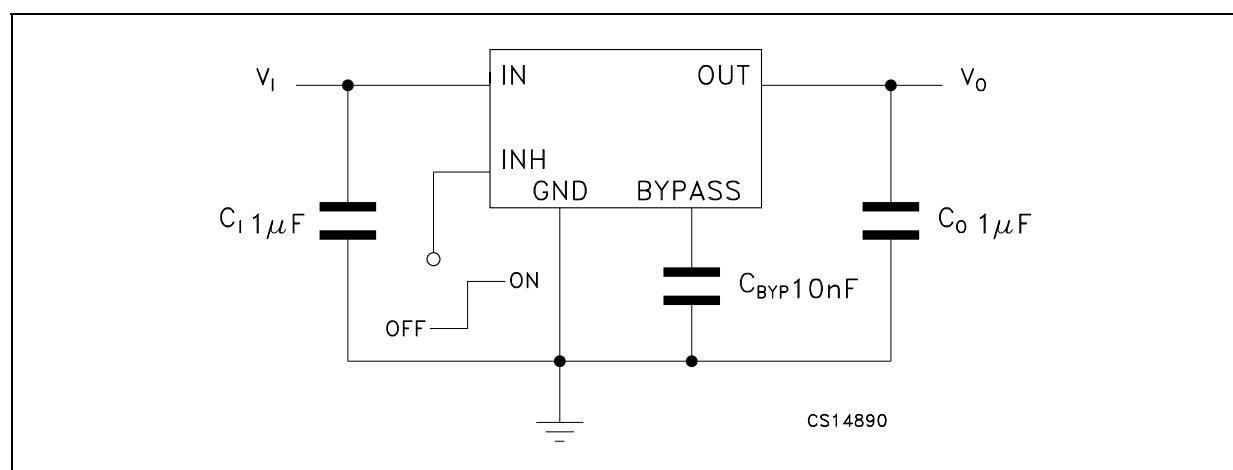

LD3985 SERIES

ELECTRICAL CHARACTERISTICS FOR LD3985 ($T_j = 25^\circ\text{C}$, $V_I = V_{O(\text{NOM})} + 0.5\text{V}$, $C_I = 1\mu\text{F}$, $C_{\text{BYP}} = 10\text{nF}$, $I_O = 1\text{mA}$, $V_{\text{INH}} = 1.4\text{V}$, unless otherwise specified)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
V_I	Operating Input Voltage			2.5		6	V
V_O	Output Voltage	$I_O = 1\text{ mA}$		-2		2	% of $V_{O(\text{NOM})}$
		$T_j = -40$ to 125°C		-3		3	
ΔV_O	Line Regulation (Note 1)	$V_I = V_{O(\text{NOM})} + 0.5$ to 6 V $T_j = -40$ to 125°C		-0.1		0.1	%/V
		$V_O = 4.7$ to 5V		-0.19		0.19	
ΔV_O	Load Regulation	$I_O = 1\text{ mA}$ to 150mA (for Flip Chip) $T_j = -40$ to 125°C			0.0004	0.002	%/mA
		$I_O = 1\text{ mA}$ to 150mA , $T_j = -40$ to 125°C (for SOT23-5L/TSOT23-5L)			0.0025	0.005	
ΔV_O	Output AC Line Regulation	$V_I = V_{O(\text{NOM})} + 1\text{ V}$, $I_O = 150\text{mA}$, $t_R = t_F = 30\mu\text{s}$			1.5		mV_{PP}
I_Q	Quiescent Current ON MODE: $V_{\text{INH}} = 1.2\text{V}$	$I_O = 0$			85		μA
		$I_O = 0$ $T_j = -40$ to 125°C				150	
		$I_O = 0$ to 150mA				170	
		$I_O = 0$ to 150mA $T_j = -40$ to 125°C				250	
	OFF MODE: $V_{\text{INH}} = 0.4\text{V}$				0.003		
		$T_j = -40$ to 125°C				1.5	
V_{DROP}	Dropout Voltage (NOTE 1)	$I_O = 1\text{mA}$			0.4		mV
		$I_O = 1\text{mA}$ $T_j = -40$ to 125°C				2	
		$I_O = 50\text{mA}$				20	
		$I_O = 50\text{mA}$ $T_j = -40$ to 125°C				35	
		$I_O = 100\text{mA}$				45	
		$I_O = 100\text{mA}$ $T_j = -40$ to 125°C				70	
		$I_O = 150\text{mA}$				60	
		$I_O = 150\text{mA}$ $T_j = -40$ to 125°C				100	
I_{SC}	Short Circuit Current	$R_L = 0$			600		mA
SVR	Supply Voltage Rejection	$V_I = V_{O(\text{NOM})} + 0.25\text{V} \pm$		$f = 1\text{KHz}$		60	dB
		$V_{\text{RIPPLE}} = 0.1\text{V}$, $I_O = 50\text{mA}$		$f = 10\text{KHz}$		50	
$I_{O(\text{PK})}$	Peak Output Current	$V_O \geq V_{O(\text{NOM})} - 5\%$		300	550		mA
V_{INH}	Inhibit Input Logic Low	$V_I = 2.5\text{V}$ to 6V $T_j = -40$ to 125°C				0.4	V
	Inhibit Input Logic High					1.2	
I_{INH}	Inhibit Input Current	$V_{\text{INH}} = 0.4\text{V}$ $V_I = 6\text{V}$				± 1	nA
$e\text{N}$	Output Noise Voltage	$B_W = 10\text{ Hz}$ to 100 KHz $C_O = 1\mu\text{F}$			30		μV_{RMS}
t_{ON}	Turn On Time (Note 4)	$C_{\text{BYP}} = 10\text{nF}$			200		μs
T_{SHDN}	Thermal Shutdown	Note 5			160		$^\circ\text{C}$
C_O	Output Capacitor	Capacitance (Note 6)		1		22	μF
		ESR		5		5000	$\text{m}\Omega$

Note 1 – For $V_{O(\text{NOM})} < 2\text{V}$, $V_I = 2.5\text{V}$

Note 2 – For $V_{O(\text{NOM})} = 1.25\text{V}$, $V_I = 2.5\text{V}$

Note 3 – Dropout voltage is the input-to-output voltage difference at which the output voltage is 100mV below its nominal value. This specification does not apply for input voltages below 2.5V.

Note 4 – Turn-on time is time measured between the enable input just exceeding V_{INH} High Value and the output voltage just reaching 95% of its nominal value

Note 5 – Typical thermal protection hysteresis is 20°C

Note 6 - The minimum capacitor value is $1\mu\text{F}$, anyway the LD3985 is still stable if the compensation capacitor has a 30% tolerance in all temperature range.

TYPICAL PERFORMANCE CHARACTERISTICS ($T_J = 25^\circ\text{C}$, $V_I = V_O(\text{NOM}) + 0.5\text{V}$, $C_I = C_O = 1\mu\text{F}$, $C_{\text{BYP}} = 10\text{nF}$, $I_O = 1\text{mA}$, $V_{\text{INH}} = 1.4\text{V}$, unless otherwise specified)

Figure 1 : Output Voltage vs Temperature

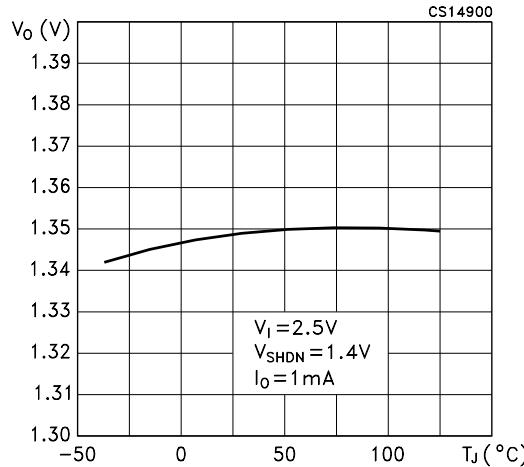


Figure 2 : Output Voltage vs Temperature

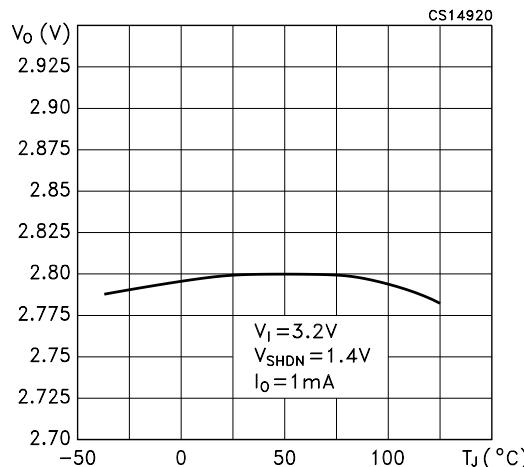


Figure 3 : Output Voltage vs Temperature

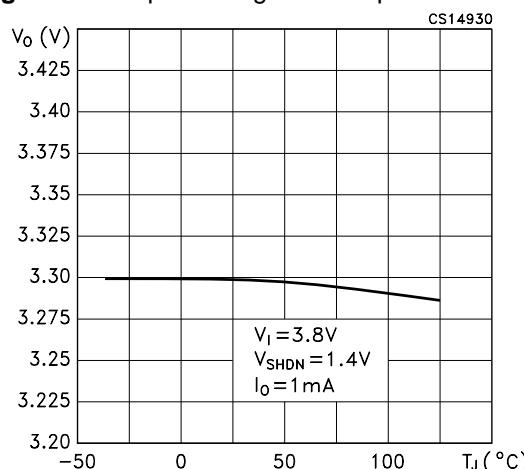


Figure 4 : Shutdown Voltage vs Temperature

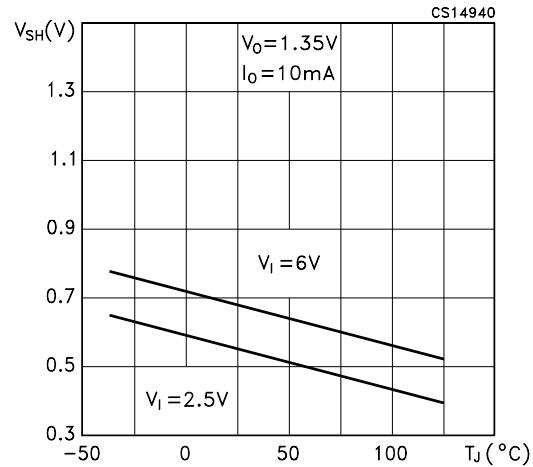


Figure 5 : Shutdown Voltage vs Temperature


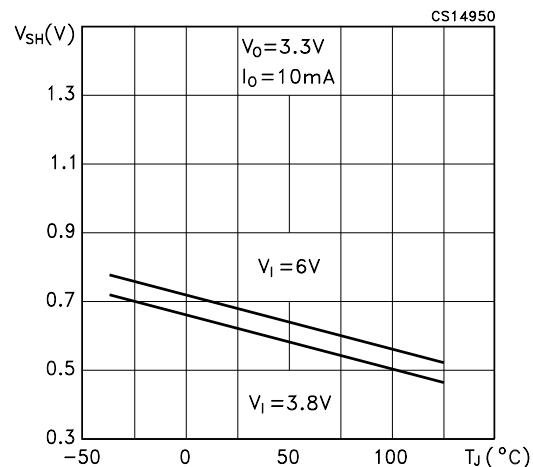


Figure 6 : Line Regulation vs Temperature

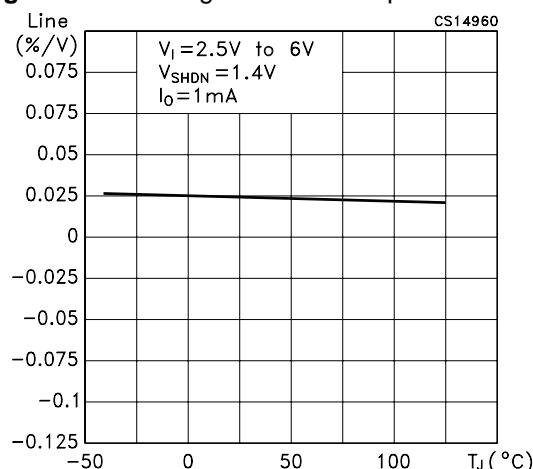

LD3985 SERIES

Figure 7 : Line Regulation vs Temperature

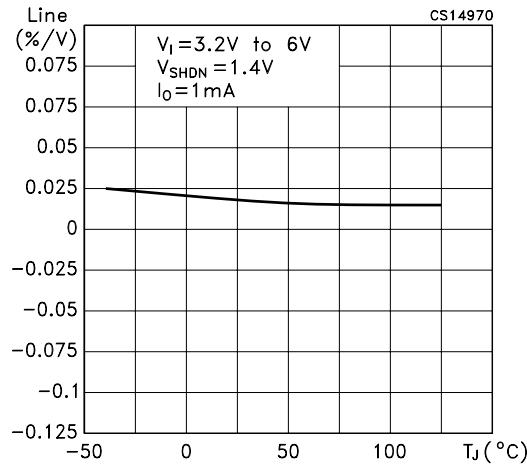


Figure 8 : Line Regulation vs Temperature

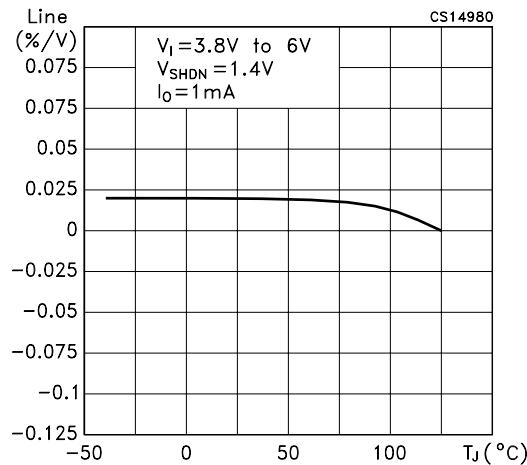


Figure 9 : Load Regulation vs Temperature

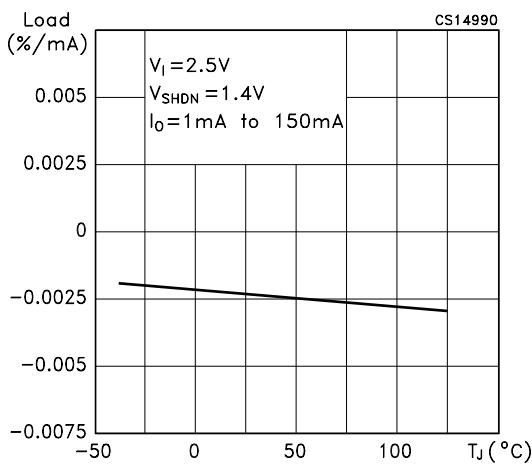


Figure 10 : Load Regulation vs Temperature

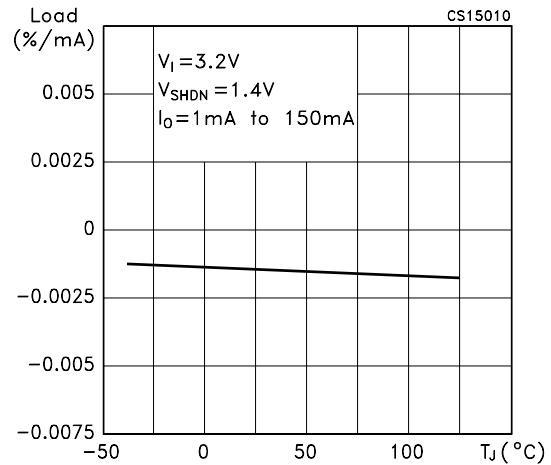


Figure 11 : Load Regulation vs Temperature

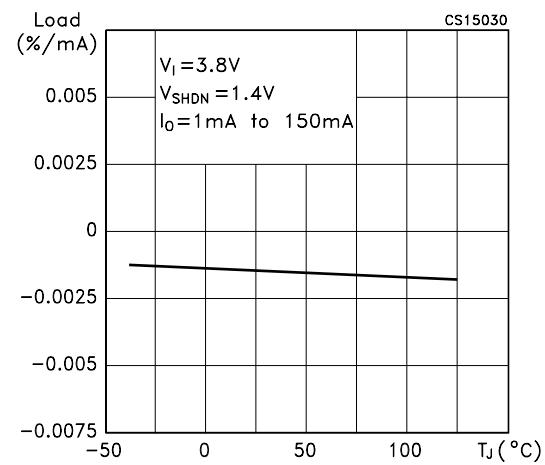


Figure 12 : Quiescent Current vs Temperature

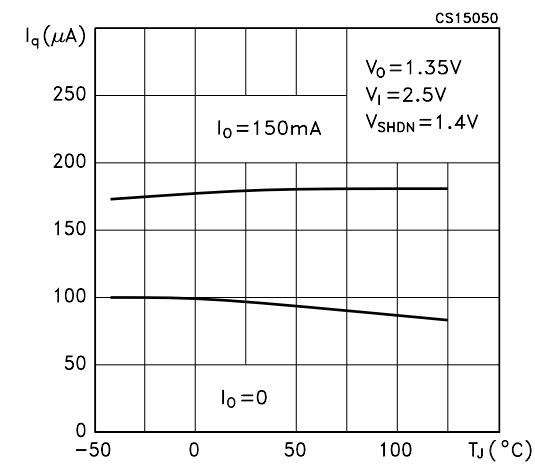


Figure 13 : Quiescent Current vs Temperature

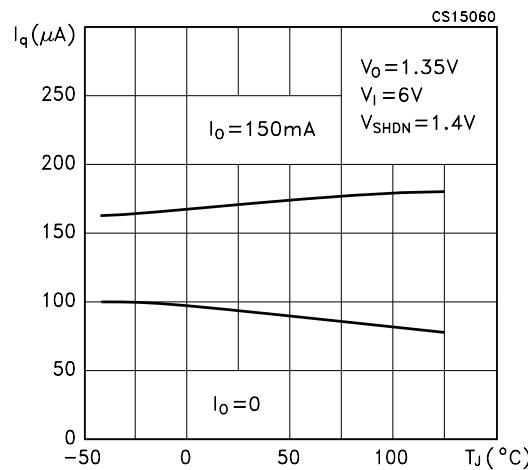


Figure 14 : Quiescent Current vs Temperature

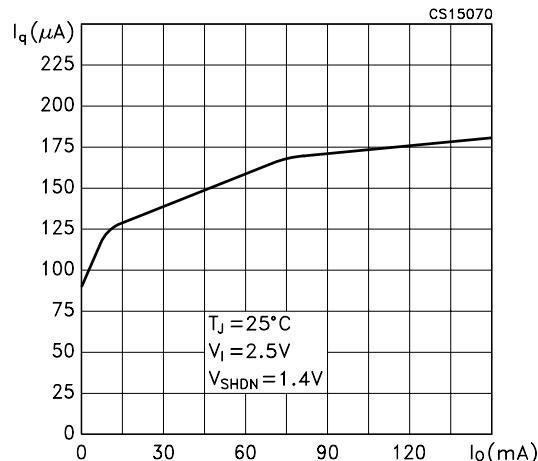


Figure 15 : Supply Voltage Rejection vs Frequency

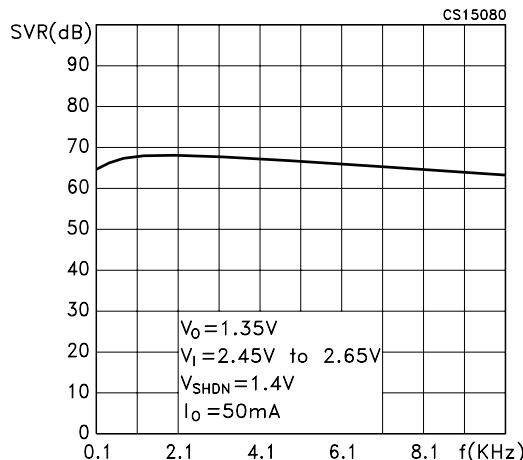


Figure 16 : Load Transient Response

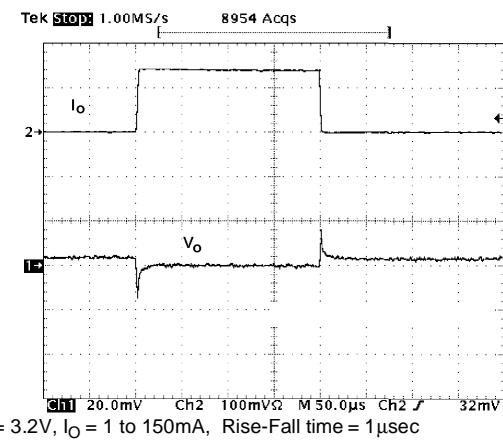


Figure 17 : Line Transient Response



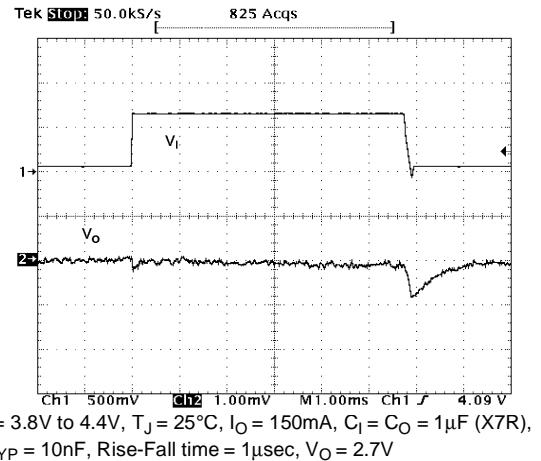


Figure 18 : START-UP

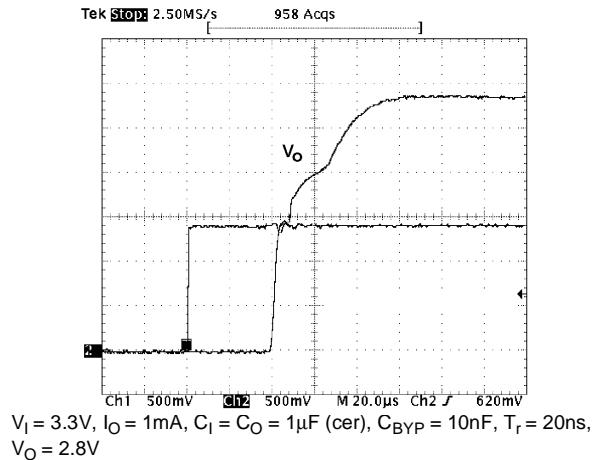


LD3985 SERIES

Figure 19 : TURN-OFF

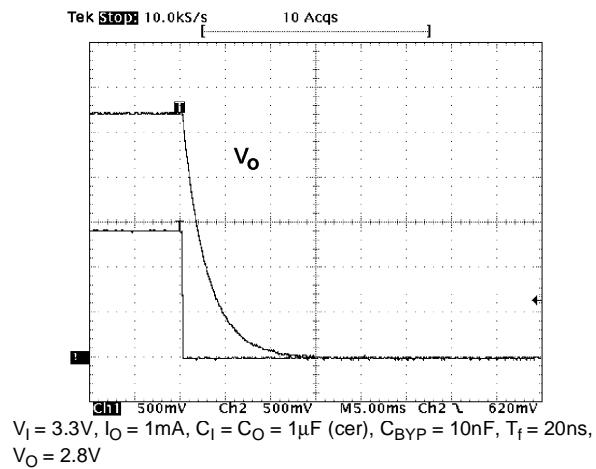


SOT23-5L MECHANICAL DATA

DIM.	mm.			mils		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	0.90		1.45	35.4		57.1
A1	0.00		0.10	0.0		3.9
A2	0.90		1.30	35.4		51.2
b	0.35		0.50	13.7		19.7
C	0.09		0.20	3.5		7.8
D	2.80		3.00	110.2		118.1
E	1.50		1.75	59.0		68.8
e		0.95			37.4	
H	2.60		3.00	102.3		118.1
L	0.10		0.60	3.9		23.6

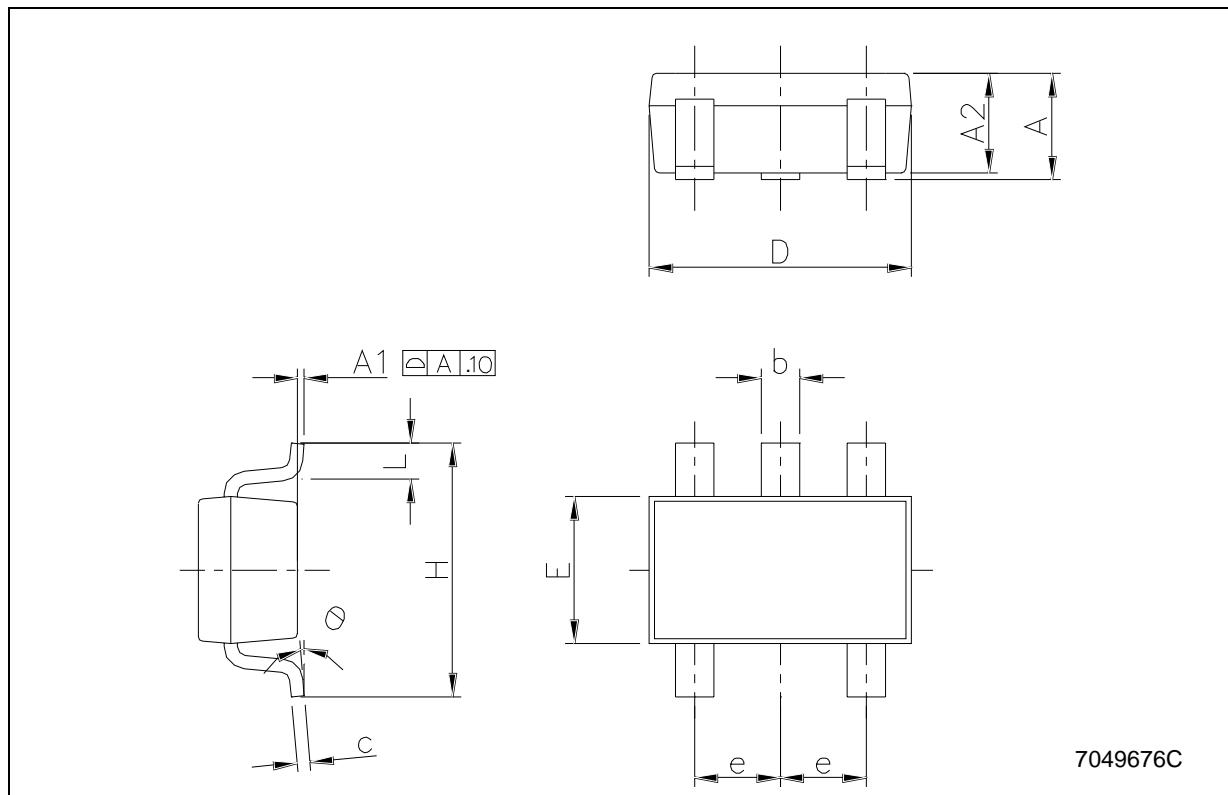

TSOT23-5L MECHANICAL DATA


DIM.	mm.			mils		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			1.1			43.3
A1	0		0.1			3.9
A2	0.7		1.0	27.6		39.4
b	0.3		0.5	11.8		19.7
C	0.08		0.2	3.1		7.9
D		2.9			114.2	
E		2.8			110.2	
E1		1.6			63.0	
e	0	.95			37.4	
e1		1.9			74.8	
L	0.3		0.6	11.8		23.6

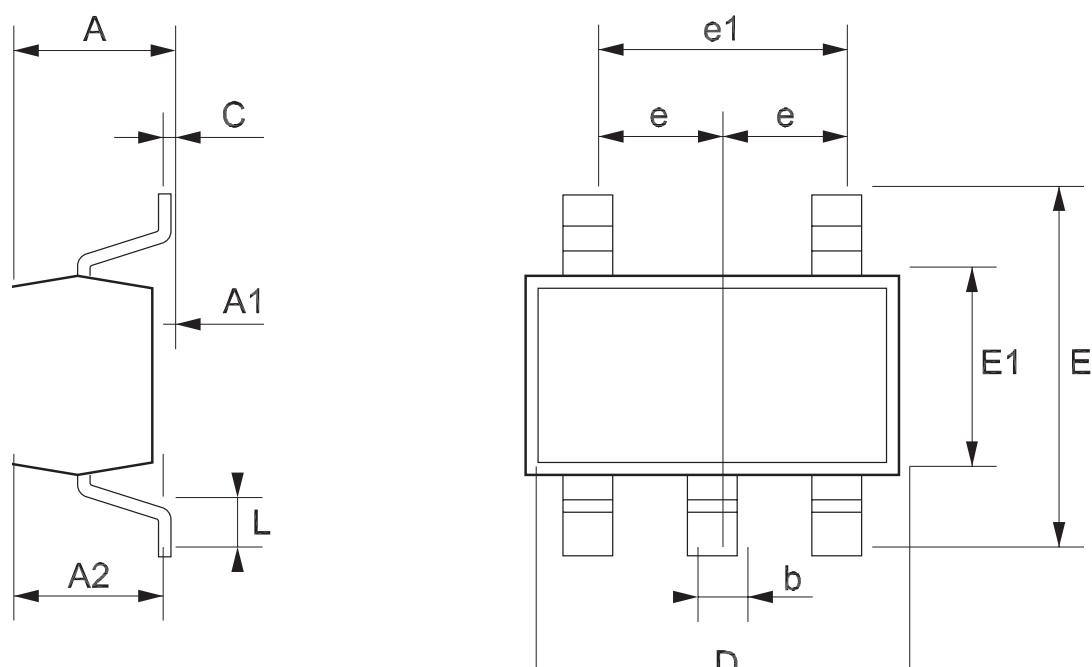

7282780/A


Flip-Chip5 MECHANICAL DATA

DIM.	mm.			mils		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	0.835	0.9	0.965	32.874	35.433	37.992
A1	0.21	0.25	0.29	8.268	9.843	11.417
A2	0.625	0.65	0.675	24.606	25.591	26.575
b	0.265	0.315	0.365	10.433	12.402	14.370
D	1.510	1.540	1.570	59.449	60.630	61.811
E	1.16	1.19	1.22	45.669	46.850	48.031
e	0.45	0.5	0.55	17.717	19.685	21.654
e1	0.816	0.866	0.916	32.126	34.094	36.063
f		0.345			13.583	
f1		0.337			13.268	

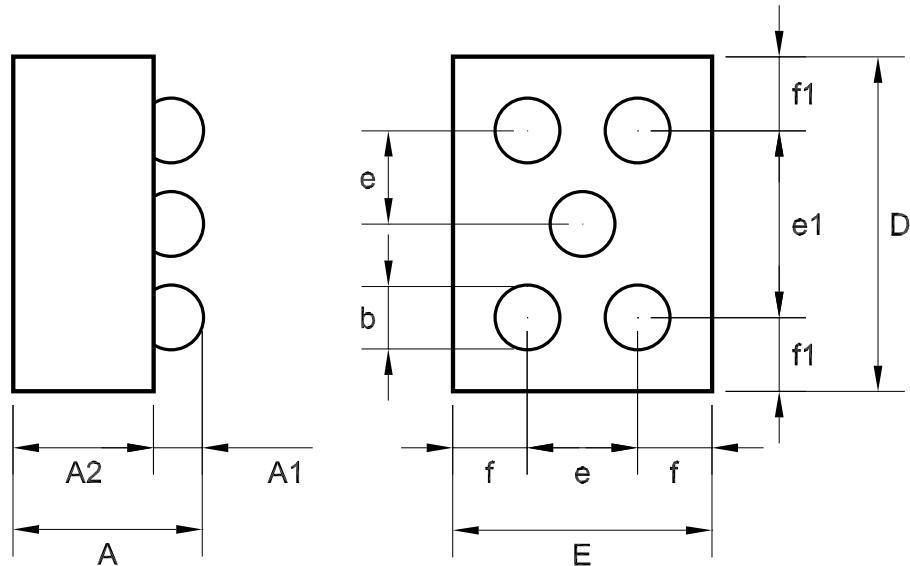

Tape & Reel SOT23-xL MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			180			7.086
C	12.8	13.0	13.2	0.504	0.512	0.519
D	20.2			0.795		
N	60			2.362		
T			14.4			0.567
Ao	3.13	3.23	3.33	0.123	0.127	0.131
Bo	3.07	3.17	3.27	0.120	0.124	0.128
Ko	1.27	1.37	1.47	0.050	0.054	0.058
Po	3.9	4.0	4.1	0.153	0.157	0.161
P	3.9	4.0	4.1	0.153	0.157	0.161

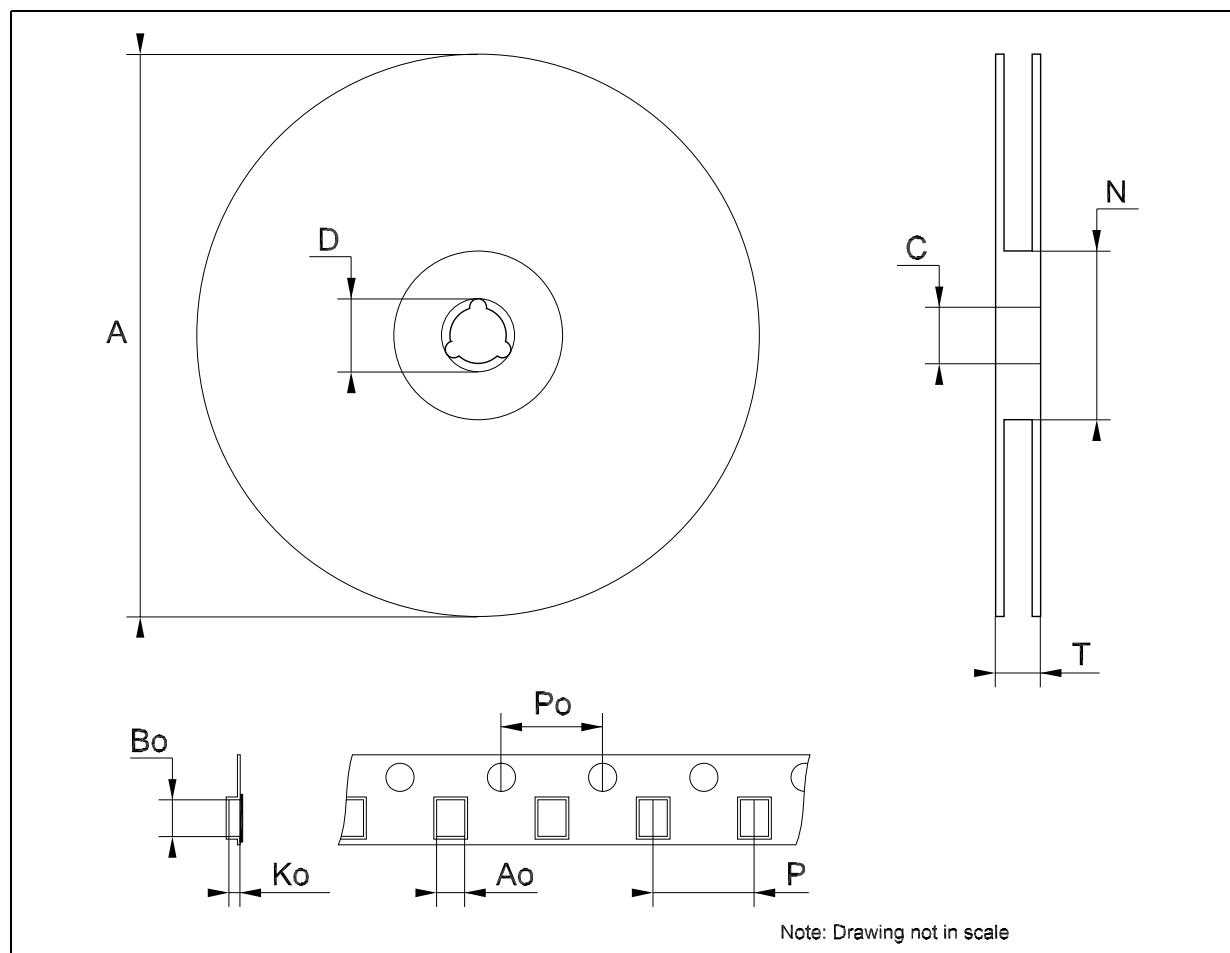

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics
All other names are the property of their respective owners

© 2003 STMicroelectronics - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.
<http://www.st.com>