

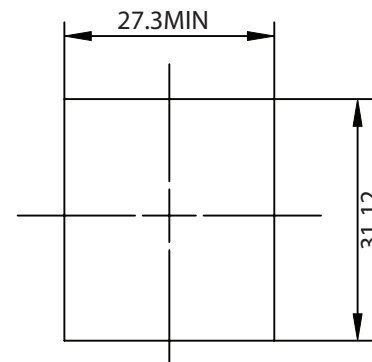


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP

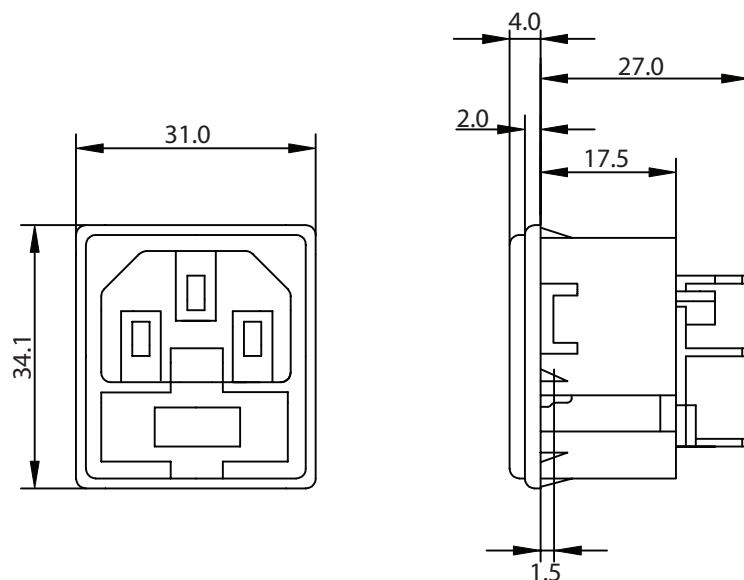

PANEL CUTOUT

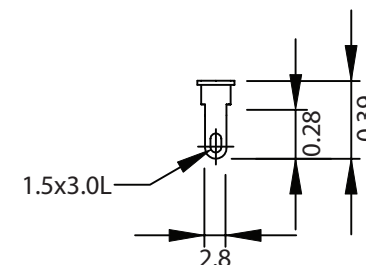

NOTES:

MATERIAL:

MOULDING: NYLON, FLAMMABILITY RATING U.L. 94V-0
 CONTACTS: BRASS, PINS NICKEL PLATED, TAGS TIN PLATED
 RATING: 10A 250V AC
 INSULATION RESISTANCE: $>10^3$ M OHM
 CONTACT RESISTANCE: <10 m OHM $9<15$ OHM INCLUDING FUSEHOLDER
 A.C. BREAKDOWN:
 POLE-POLE: 5.5kV
 POLES-PANEL: 4.0kV
 OPERATING TEMPERATURE: -40° C TO $+70^{\circ}$ C
 MAX. PIN TEMPERATURE: $+65^{\circ}$ C
 APPROVALS: UL, CSA, VDE
 DUAL FUSE HOLDER, ONE ACTIVE, ONE SPARE
 FUSES NOT INCLUDED - RECOMMENDED SIZE: 5 X 20mm
 PANEL THICKNESS: 1.5mm
 RoHS COMPLIANT

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number:	723-15/28	RoHS Compliant
0-1	0.15	Description: AC RECEPTACLE		
1-6	0.20			
6-18	0.30		UNIT: mm	REV. B
18-50	0.50			
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	B.Zhang 05-17-04	05-17-04	JJH / 05-17-04
250-500	1.20			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Qualtek:

723-15/28