

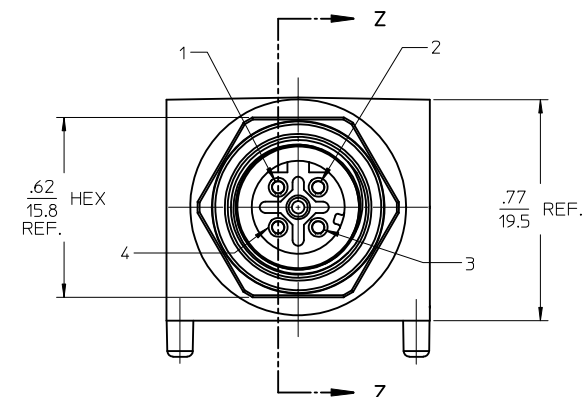
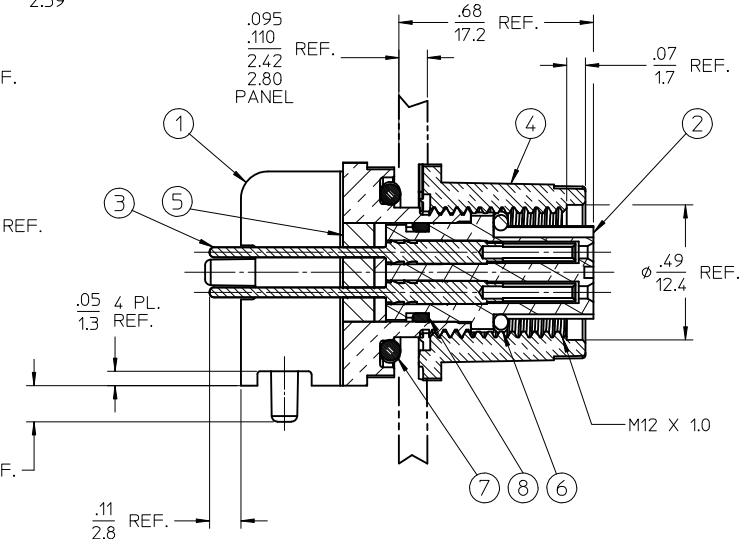
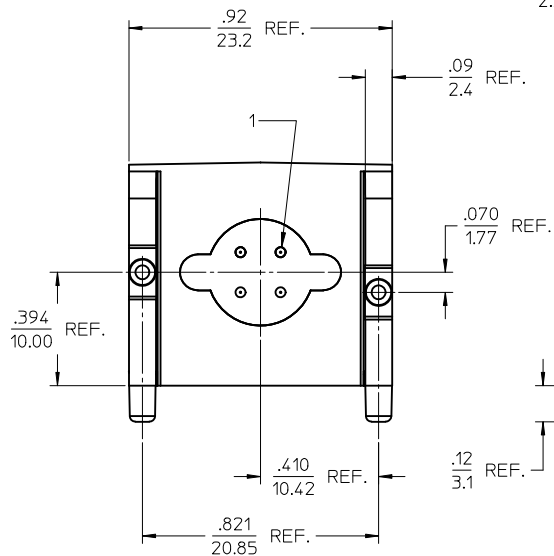
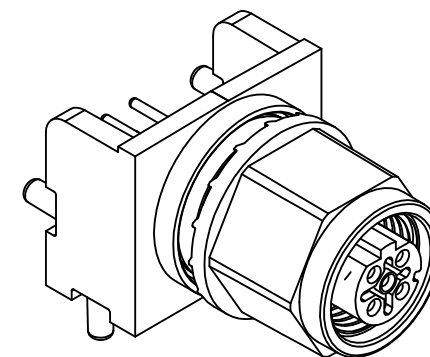
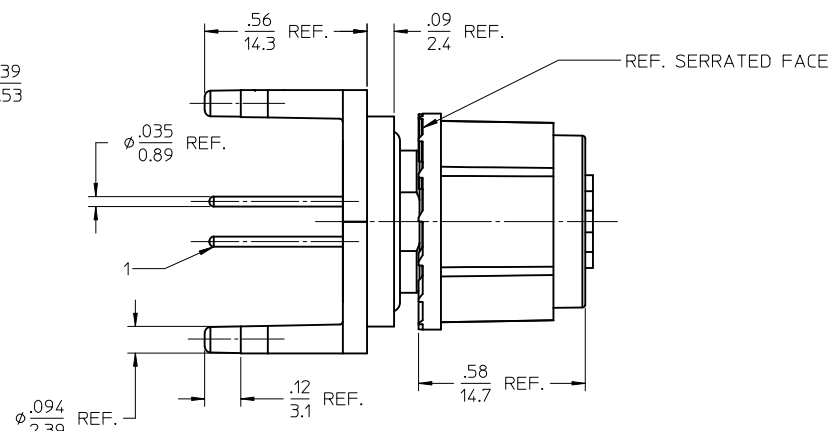


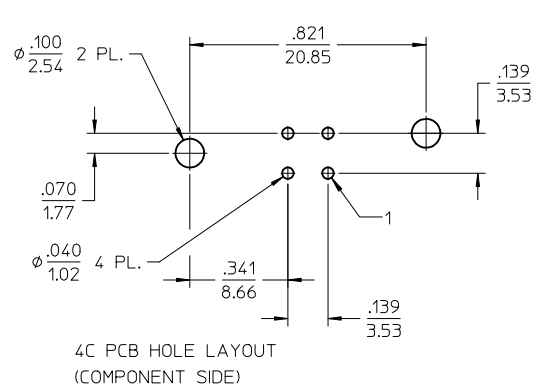

Section Z-Z

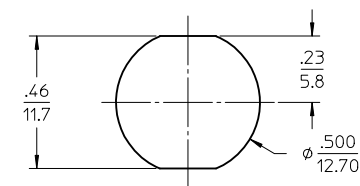

MOUNTING HOLE LAYOUT

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. PRODUCT SPEC: PS-130299-001
4. PACKAGING: PK-130299-001
5. MATES WITH: MALE D-CODE CABLE ASSEMBLY
6. ELECTRICAL SPECS:
VOLTAGE: 250V AC/DC
CURRENT: 4 AMPS
7. PROTECTION: IP67
8. ASSEMBLY IS RoHS COMPLIANT

8	1	INSULATOR O-RING	VITON	BROWN
7	1	PANEL O-RING	VITON	RED
6	1	MATING O-RING	VITON	RED
5	A/R	POTTING COMPOUND	EPOXY	RED
4	1	PANEL NUT	ZINC (DIE-CAST)	CHROME/DUPLEX NICKEL
3	4	CONTACT SOCKET	BRASS	GOLD PLATED
2	1	4/C D-CODE INSULATOR	PUR	BLACK
1	1	RECEPTACLE SHELL, M12	ZINC (DIE-CAST)	WHITE BRONZE PLATING
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

REMOVED CUST SIGN-OFF EC NO: WNA2011-0198 DWRNRSTONE 2010/10/15 CHYKDK, JOZWIK 2010/10/21 APPR: JFMURPHY 2010/12/14	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 3:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY	DATE	TITLE MIC PCB RECEPTACLE 4C, D-CODE, STRAIGHT				
			4 PLACES	±---	±---	RSTONE	2010/05/17					
			3 PLACES	±---	±.005	CHECKED BY	DATE	MOLEX MOLEX INCORPORATED				
			2 PLACES	±0.13	±.010	K. JOZWIK	2010/05/25					
			1 PLACE	±0.3	±---	APPROVED BY	DATE	molex MOLEX INCORPORATED				
			ANGULAR ± 2 °		JFMURPHY	2010/05/20						
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
					SEE CHART		SD-130299-006		1 OF 1			
					SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						