
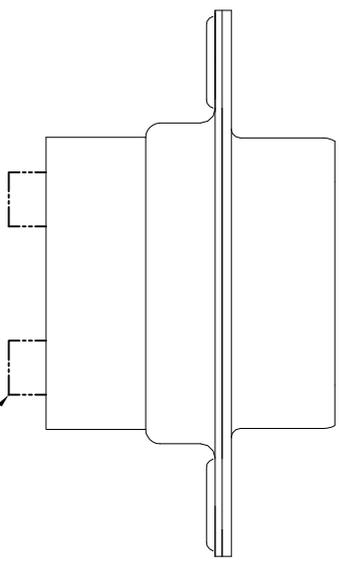
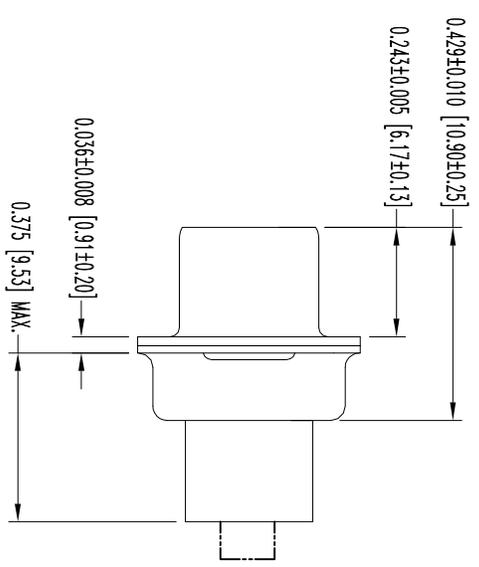


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC INDUSTRIES INC. THE USER AGREES TO HOLD POSITRONIC INDUSTRIES INC. HARMLESS FROM AND TO INDEMNIFY POSITRONIC INDUSTRIES INC. FROM AND AGAINST ALL CLAIMS, DAMAGES, LOSSES AND EXPENSES, INCLUDING REASONABLE ATTORNEY'S FEES, THAT MAY BE ASSERTED AGAINST OR INCURRED BY POSITRONIC INDUSTRIES INC. OR ITS EMPLOYEES, AGENTS, CONTRACTORS, SUBCONTRACTORS, OFFICERS, DIRECTORS, OR SHAREHOLDERS, ARISING OUT OF OR RESULTING FROM THE USER'S EMPLOYMENT OF THIS DRAWING. THE USER AGREES TO BE RELEASED FROM THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION. POSITRONIC INDUSTRIES INC. MAKES NO WARRANTY, REPRESENTATION OR GUARANTEE OF ANY KIND, INCLUDING MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. POSITRONIC INDUSTRIES INC. ASSUMES NO LIABILITY FOR ANY RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK10968

DATE	REV	REVISION RECORD	APP	DR	CK
8-20-09	NC	ECO 31444	RCW	BS	COLB

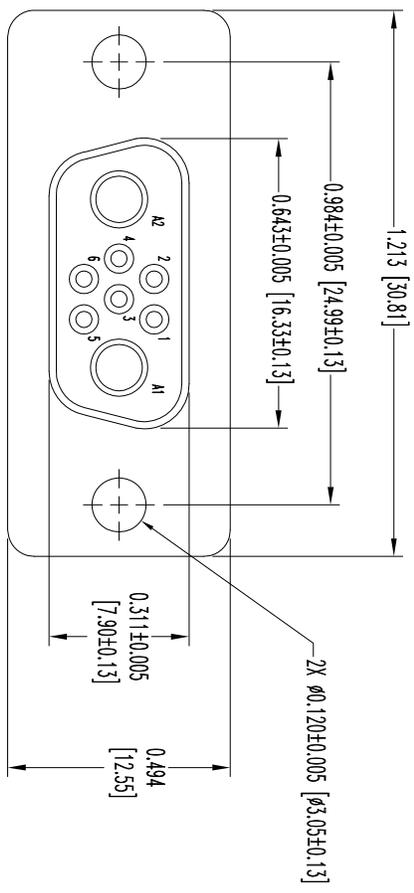

CRIMP CONTACTS
MUST BE ORDERED SEPARATELY

NOTES:

1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, COLOR: BLUE.
SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
2. ELECTRICAL CHARACTERISTICS:
INSULATOR RESISTANCE: 5 G OHMS.
WORKING VOLTAGE: 300 r.m.s.
3. WORKING TEMPERATURE: -55°C TO +125°C
4. FEMALE SIZE 22 SIGNAL CRIMP CONTACTS FOR USE WITH THIS CONNECTOR MAY BE ORDERED AS PART NUMBER FC8022D (FOR REF. ONLY)
5. FEMALE SIZE 16 POWER CRIMP CONTACTS FOR USE WITH THIS CONNECTOR MAY BE ORDERED AS PART NUMBER FC1**NA (FOR REF. ONLY)
6. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

FSC# 28198

DECIMAL TOL. ± 0.015 [0.38]	ANGULAR TOL. ± 5°	CBCD SERIES	SCALE N.T.S.	DRAWN BY B SHELLBUDY	DATE 8-20-09	DRAWING NUMBER SK10968	REV. NC
TITLE CBCD8W2F000000		APPROVED BY R WILLIAMS					