

USB 2.0 PLUGS & SOCKETS

SOCKET SPECIFICATIONS:

Shell: Phosphor Bronze
Insulator: Thermoplastic, UL Rated 94V-0
Contacts: Phosphor Bronze
Contact Area: Gold Flash over Nickel
Solder Trails: Tin over Nickel

PLUG SPECIFICATIONS:

Shell: Steel, Nickel Plate
Insulator: Thermoplastic, Rated UL 94V-0
Contact: Bronze, Gold Flash over Nickel

ELECTRICAL CHARACTERISTICS

Rated Voltage: 30V (RMS)
Contact Current Rating: 1 Amp DC max.
Contact Resistance: 15 mΩ max.
Insulation Resistance: 1000 mΩ min.
Dielectric Withstanding Voltage: 750V AC for 1 minute

MECHANICAL CHARACTERISTICS

Operating Temperature: -13°F (-25°C) to +176°F (+80°C)
Durability: 1500 Cycles min.


DEVICE APPLICATIONS

Ability to daisy chain more than one input device


- Mouse/Keyboards
- MP3 Players
- Printers/Scanners
- Digital Cameras/Video
- Memory Sticks
- PDAs and Cell Phones

TYPE A SOCKETS

SURFACE MOUNT

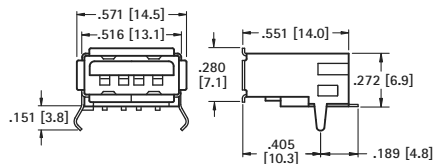


920

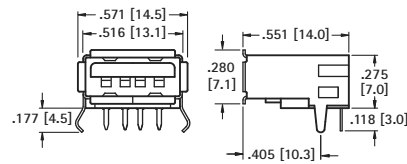


921

Mounting Detail Cat. No. 920




CAT. NO. 920

Mounting Detail Cat. No. 921




CAT. NO. 921

VERTICAL





Mounting Detail




CAT. NO. 923

DUAL STACKING

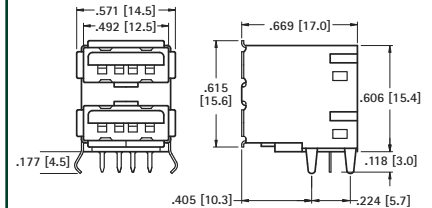

Mounting Detail





CAT. NO. 922

TYPE A PLUGS


FEATURES

- Available for on-board applications such as memory sticks
- Cable clamp style for creating custom cables
- Gold plated contacts for low contact resistance and excellent reliability

SURFACE MOUNT





Mounting Detail




CAT. NO. 931

THRU HOLE MOUNT



Mounting Detail




CAT. NO. 932

CABLE PLUG



- Supplied unassembled

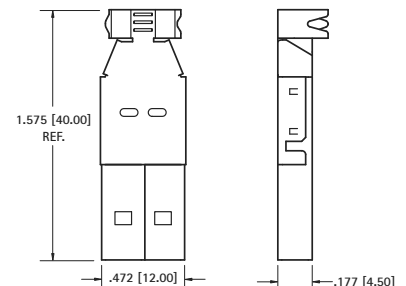

CAT. NO. 925

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keystone Electronics:](#)

[922](#) [923](#) [925](#) [921](#) [920](#) [931](#) [932](#)