


[illegible]


REVISIONS	
14	
15	
16	
17	
18	
19	
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	
30	
31	
32	
33	
34	
35	
36	
37	
38	
39	
40	
41	
42	
43	
44	
45	
46	
47	
48	
49	
50	
51	
52	
53	
54	
55	
56	
57	
58	
59	
60	
61	
62	
63	
64	
65	
66	
67	
68	
69	
70	
71	
72	
73	
74	
75	
76	
77	
78	
79	
80	
81	
82	
83	
84	
85	
86	
87	
88	
89	
90	
91	
92	
93	
94	
95	
96	
97	
98	
99	
100	

DATE	AND
2/25/64	67 DAY

METRIC

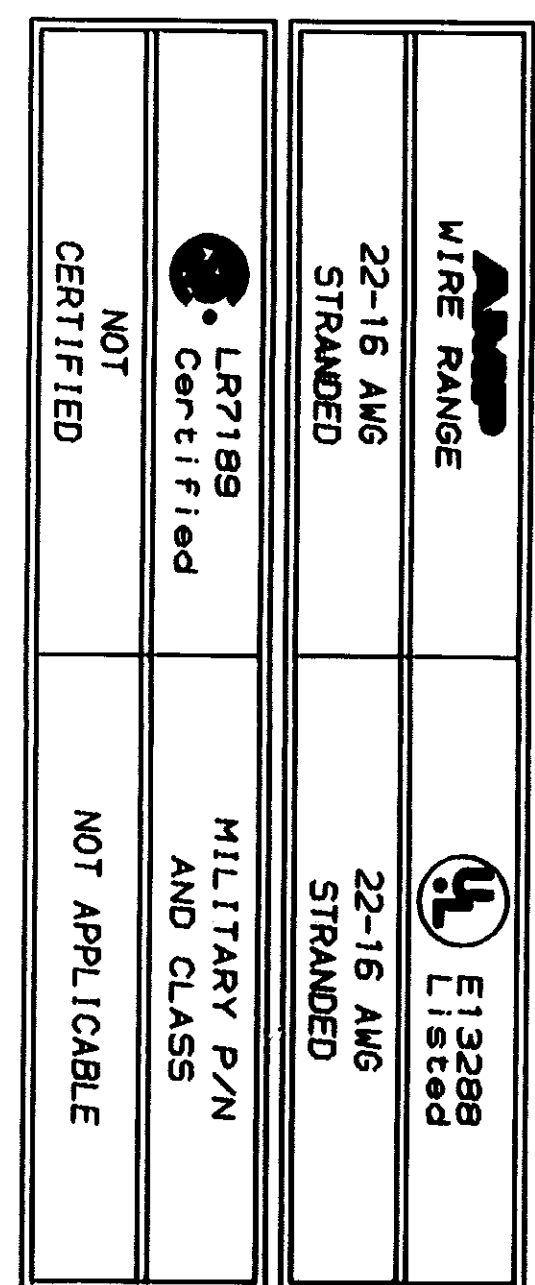

STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16

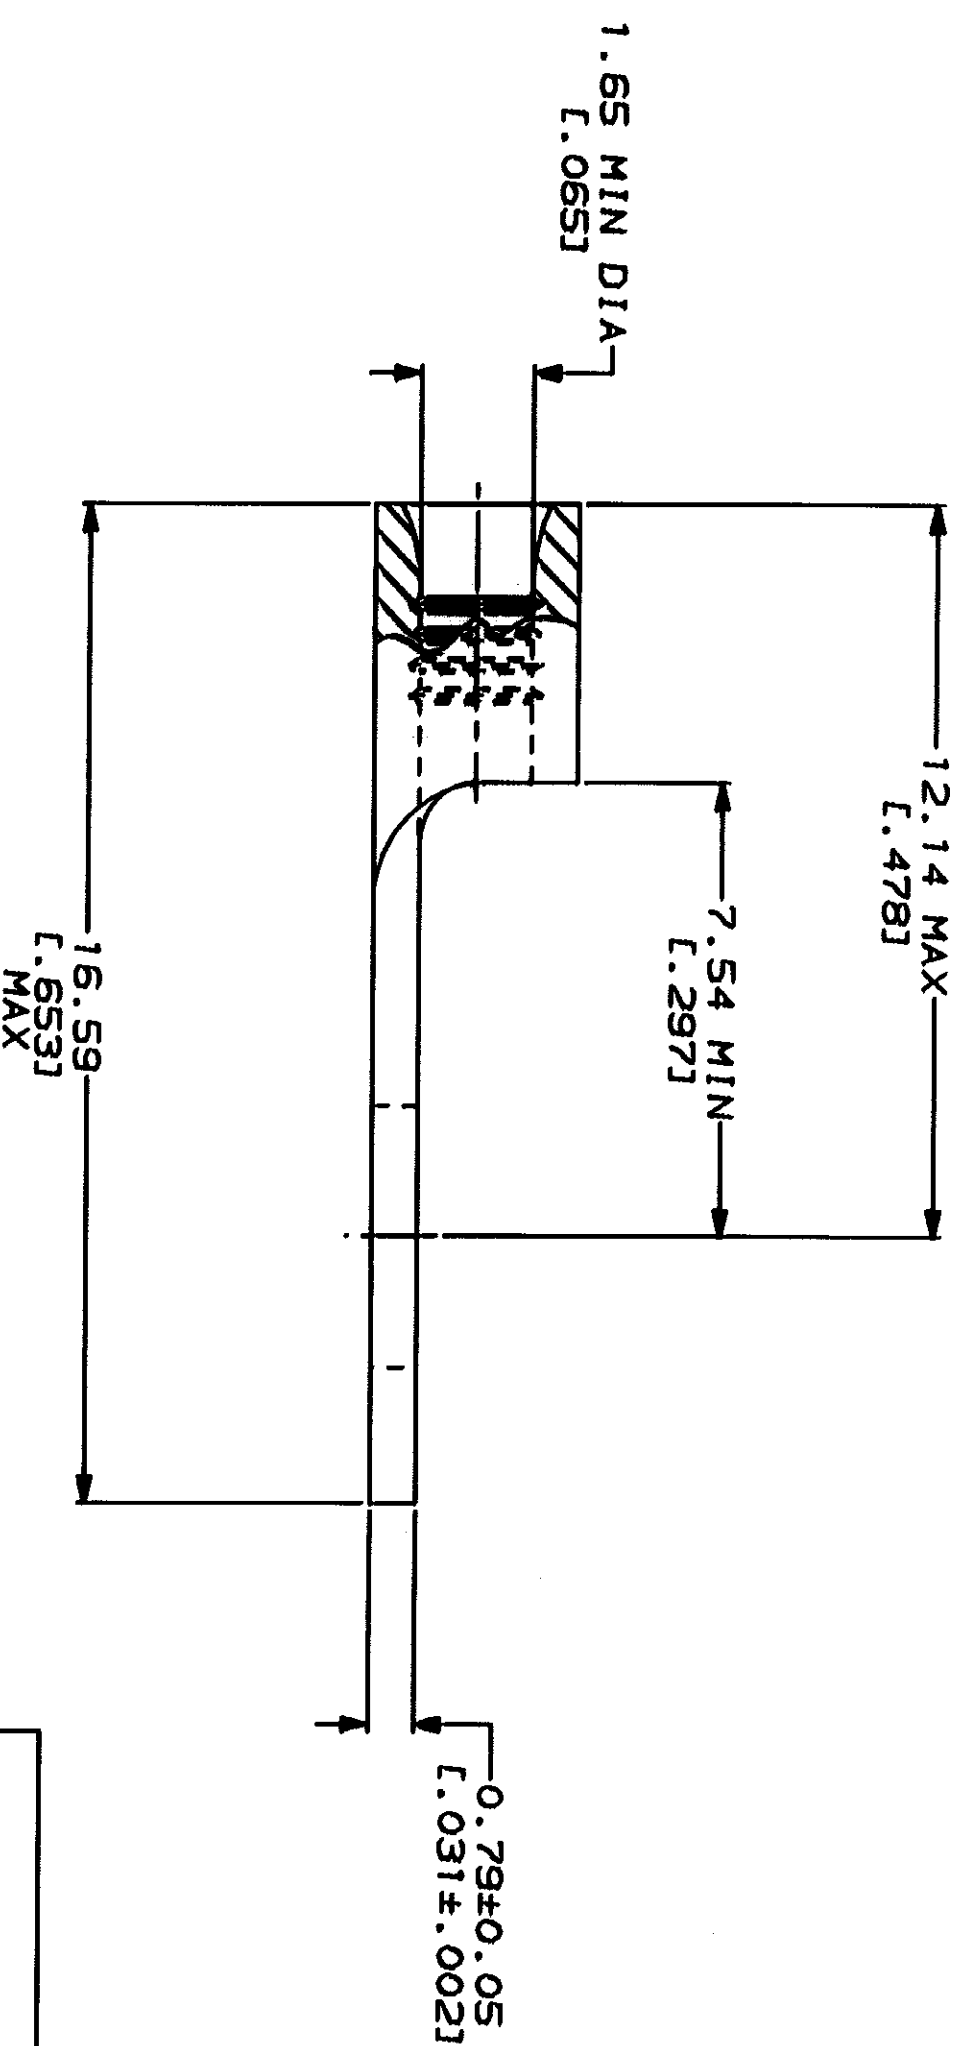

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
--	---

FOR ORDER ENTRY

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C MAX

VOLTAGE RATING:

NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:

V.28-1.000000
L303-3,2
STRANDET

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AIP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLING BUSINESS ORGANIZATION SHOULD BE CONSULTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN mm (INCHES)
TOLERANCES ON ,
2 PLC DEC +
3 PLC DEC +
ANGLES +
MATERIAL

DR	2-26-93
TA	BRINKMAN
CMK	2-26-93
DA	PATTERSON
APPD	2-26-93
DE	MILLER
APPD	2-26-93

AT&T AT&T Incorporated Harrisburg, PA 17105-3508	TERMINAL RING TONGUE
---	-------------------------

BUDGET

CG 00779 CG-32823

SCALE	8.1	ST
-------	-----	----

CUSTOMER DRAWING