




- VDC: 12, 24, 48
- RPM: 1500~5200
- CFM: 6.90~24.22
- Impeller: 7 blades

- Rotational direction CCW view from front face
- PBT94V-0 frame and impeller
- AWG 24; UL 1007 lead wires
- Mass: 55g



## DC FAN

60x60x25mm


### Specification

|           | Bearing                                              | Voltage | Current   | Speed     | Input Power | Air Flow   | Static Pressure       | Noise     | Weight |
|-----------|------------------------------------------------------|---------|-----------|-----------|-------------|------------|-----------------------|-----------|--------|
| MODEL NO  | ○ Sleeve<br>● One ball and one sleeve<br>○ Hydraulic | (Vdc)   | (Amp)     | (Rpm)     | (Watts)     | (CFM)      | (mm/H <sub>2</sub> O) | dB(A)     | Gram   |
| B6025S12E | ○                                                    | 12      | 0.08      | 2600      | 0.96        | 11.50      | 1.90                  | 22.9      | 55     |
| B6025B12L | ●                                                    | 12      | 0.12      | 3300      | 1.44        | 14.97      | 2.96                  | 25.2      | 55     |
| B6025S12L | ○                                                    | 12      | 0.12      | 3300      | 1.44        | 14.97      | 2.96                  | 25.2      | 55     |
| B6025B12M | ●                                                    | 12      | 0.14      | 3900      | 1.68        | 17.66      | 3.95                  | 29.3      | 55     |
| B6025S12M | ○                                                    | 12      | 0.14      | 3900      | 1.68        | 17.66      | 3.95                  | 29.3      | 55     |
| B6025B12H | ●                                                    | 12      | 0.16      | 4500      | 1.92        | 20.69      | 5.36                  | 34.1      | 55     |
| B6025B24L | ●                                                    | 24      | 0.06      | 3300      | 1.44        | 14.97      | 2.96                  | 25.2      | 55     |
| B6025S24L | ○                                                    | 24      | 0.06      | 3300      | 1.44        | 14.97      | 2.96                  | 25.2      | 55     |
| B6025B24M | ●                                                    | 24      | 0.07      | 3900      | 1.68        | 17.66      | 3.95                  | 29.3      | 55     |
| B6025S24M | ○                                                    | 24      | 0.07      | 3900      | 1.68        | 17.66      | 3.95                  | 29.3      | 55     |
| B6025B24H | ●                                                    | 24      | 0.08      | 4500      | 1.92        | 20.69      | 5.36                  | 34.1      | 55     |
| B6025B24U | ●                                                    | 24      | 0.13      | 5200      | 3.12        | 24.22      | 7.21                  | 38.3      | 55     |
| B6025B48L | ●                                                    | 48      | 0.03      | 3300      | 1.44        | 14.97      | 2.96                  | 25.2      | 55     |
| B6025B48M | ●                                                    | 48      | 0.04      | 3900      | 1.92        | 17.66      | 3.95                  | 29.3      | 55     |
| B6025B48H | ●                                                    | 48      | 0.13      | 4500      | 6.24        | 20.69      | 5.36                  | 34.1      | 55     |
| C6025B12E | ●                                                    | 12      | 0.07      | 2600      | 0.84        | 11.50      | 1.90                  | 22.9      | 55     |
| C6025B12L | ●                                                    | 12      | 0.12      | 3300      | 1.44        | 14.97      | 2.96                  | 25.2      | 55     |
| C6025S12L | ○                                                    | 12      | 0.09      | 3300      | 1.08        | 14.97      | 2.96                  | 25.2      | 55     |
| C6025B12M | ●                                                    | 12      | 0.13      | 3900      | 1.56        | 17.66      | 3.95                  | 29.3      | 55     |
| C6025S12M | ○                                                    | 12      | 0.13      | 3900      | 1.56        | 17.66      | 3.95                  | 29.3      | 55     |
| C6025B12H | ●                                                    | 12      | 0.14      | 4500      | 1.68        | 20.69      | 5.36                  | 34.1      | 55     |
| C6025B24L | ●                                                    | 24      | 0.06      | 3300      | 1.44        | 14.97      | 2.96                  | 25.2      | 55     |
| C6025S24L | ○                                                    | 24      | 0.05      | 3300      | 1.20        | 14.97      | 2.96                  | 25.2      | 55     |
| C6025B24M | ●                                                    | 24      | 0.075     | 3900      | 1.80        | 17.66      | 3.95                  | 29.3      | 55     |
| C6025S24M | ○                                                    | 24      | 0.075     | 3900      | 1.80        | 17.66      | 3.95                  | 29.3      | 55     |
| C6025B24H | ●                                                    | 24      | 0.12      | 4500      | 2.88        | 20.69      | 5.36                  | 34.1      | 55     |
| C6025B48L | ●                                                    | 48      | 0.04      | 3300      | 1.92        | 14.97      | 2.96                  | 25.2      | 55     |
| C6025S48L | ○                                                    | 48      | 0.04      | 3300      | 1.92        | 14.97      | 2.96                  | 25.2      | 55     |
| C6025B48M | ●                                                    | 48      | 0.05      | 3900      | 2.40        | 17.66      | 3.95                  | 29.3      | 55     |
| C6025S48M | ○                                                    | 48      | 0.05      | 3900      | 2.40        | 17.66      | 3.95                  | 29.3      | 55     |
| C6025B48H | ●                                                    | 48      | 0.09      | 4500      | 4.32        | 20.69      | 5.36                  | 34.1      | 55     |
| D6025B12E | ●                                                    | 12      | 0.08      | 2600      | 0.96        | 11.50      | 1.90                  | 22.9      | 55     |
| D6025B12L | ●                                                    | 12      | 0.12      | 3300      | 1.44        | 14.97      | 2.96                  | 25.2      | 55     |
| D6025S12L | ○                                                    | 12      | 0.12      | 3300      | 1.44        | 14.97      | 2.96                  | 25.2      | 55     |
| D6025B12M | ●                                                    | 12      | 0.12      | 3900      | 1.44        | 17.66      | 3.95                  | 29.3      | 55     |
| D6025S12M | ○                                                    | 12      | 0.14      | 3900      | 1.68        | 17.66      | 3.95                  | 29.3      | 55     |
| D6025B24L | ●                                                    | 24      | 0.05      | 3300      | 1.20        | 14.97      | 2.96                  | 25.2      | 55     |
| D6025S24L | ○                                                    | 24      | 0.05      | 3300      | 1.20        | 14.97      | 2.96                  | 25.2      | 55     |
| D6025R24L | ◎                                                    | 24      | 0.06      | 3300      | 1.44        | 14.97      | 2.96                  | 25.2      | 55     |
| D6025B24M | ●                                                    | 24      | 0.07      | 3900      | 1.68        | 17.66      | 3.95                  | 29.3      | 55     |
| D6025S24M | ○                                                    | 24      | 0.07      | 3900      | 1.68        | 17.66      | 3.95                  | 29.3      | 55     |
| D6025B24H | ●                                                    | 24      | 0.08      | 4500      | 1.92        | 20.69      | 5.36                  | 34.1      | 55     |
| E6025B12H | ●                                                    | 12      | 0.12~0.23 | 1500~4500 | 1.44~2.76   | 6.90~20.69 | 0.75~5.36             | 23.3~34.1 | 55     |
| E6025R12H | ◎                                                    | 12      | 0.10~0.22 | 1500~4500 | 1.20~2.64   | 6.90~20.69 | 0.75~5.36             | 23.3~34.1 | 55     |
| F6025B12E | ●                                                    | 12      | 0.07      | 2600      | 0.84        | 11.50      | 1.90                  | 22.9      | 55     |
| F6025S12E | ○                                                    | 12      | 0.07      | 2600      | 0.84        | 11.50      | 1.90                  | 22.9      | 55     |
| F6025B12L | ●                                                    | 12      | 0.12      | 3300      | 1.44        | 14.97      | 2.96                  | 25.2      | 55     |

Continue



- VDC: 12, 24, 48
- RPM: 1500~5200
- CFM: 6.90~24.22
- Impeller: 7 blades
- Rotational direction CCW view from front face
- PBT94V-0 frame and impeller
- AWG 24; UL 1007 lead wires
- Mass: 55g




## DC FAN

60x60x25mm

### Specification

|           | Bearing                                              | Voltage | Current | Speed | Input Power | Air Flow | Static Pressure       | Noise | Weight |
|-----------|------------------------------------------------------|---------|---------|-------|-------------|----------|-----------------------|-------|--------|
| MODEL NO  | ○ Sleeve<br>● One ball and one sleeve<br>○ Hydraulic | (Vdc)   | (Amp)   | (Rpm) | (Watts)     | (CFM)    | (mm/H <sub>2</sub> O) | dB(A) | Gram   |
| F6025S12L | ○                                                    | 12      | 0.09    | 3300  | 1.08        | 14.97    | 2.96                  | 25.2  | 55     |
| F6025B12M | ●                                                    | 12      | 0.11    | 3900  | 1.32        | 17.66    | 3.95                  | 29.3  | 55     |
| F6025S12M | ○                                                    | 12      | 0.11    | 3900  | 1.32        | 17.66    | 3.95                  | 29.3  | 55     |
| F6025B12H | ●                                                    | 12      | 0.15    | 4500  | 1.80        | 20.69    | 5.36                  | 34.1  | 55     |
| F6025B24L | ●                                                    | 24      | 0.06    | 3300  | 1.44        | 14.97    | 2.96                  | 25.2  | 55     |
| F6025S24L | ○                                                    | 24      | 0.06    | 3300  | 1.44        | 14.97    | 2.96                  | 25.2  | 55     |
| F6025B24M | ●                                                    | 24      | 0.07    | 3900  | 1.68        | 17.66    | 3.95                  | 29.3  | 55     |
| F6025S24M | ○                                                    | 24      | 0.07    | 3900  | 1.68        | 17.66    | 3.95                  | 29.3  | 55     |
| F6025B24H | ●                                                    | 24      | 0.10    | 4500  | 2.40        | 20.69    | 5.36                  | 34.1  | 55     |
| F6025B24U | ●                                                    | 24      | 0.12    | 5200  | 2.88        | 24.22    | 7.21                  | 38.3  | 55     |
| F6025B48L | ●                                                    | 48      | 0.04    | 3300  | 1.92        | 14.97    | 2.96                  | 25.2  | 55     |
| F6025S48L | ○                                                    | 48      | 0.04    | 3300  | 1.92        | 14.97    | 2.96                  | 25.2  | 55     |
| F6025B48M | ●                                                    | 48      | 0.05    | 3900  | 2.40        | 17.66    | 3.95                  | 29.3  | 55     |
| F6025S48M | ○                                                    | 48      | 0.05    | 3900  | 2.40        | 17.66    | 3.95                  | 29.3  | 55     |
| F6025B48H | ●                                                    | 48      | 0.13    | 4500  | 6.24        | 20.69    | 5.36                  | 34.1  | 55     |

Design specifics subject to change without notice.

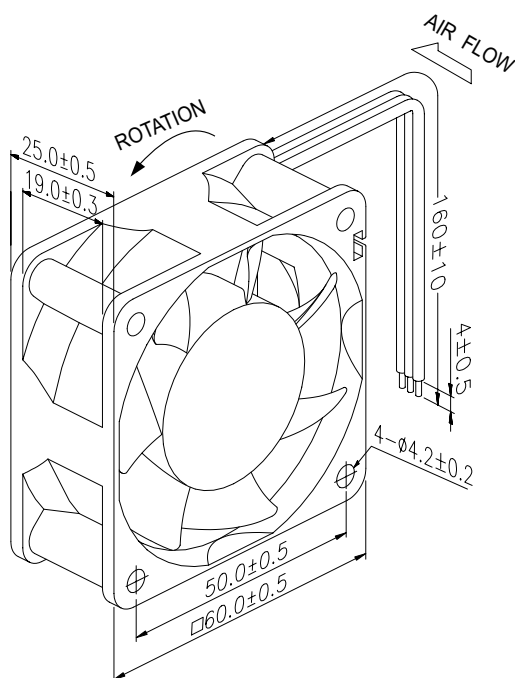

### STATIC PRESSURE

