



DESCRIPTION

The H11DX and 4N38 are phototransistor-type optically coupled optoisolators. An infrared emitting diode manufactured from specially grown gallium arsenide is selectively coupled with a high voltage NPN silicon phototransistor. The device is supplied in a standard plastic six-pin dual-in-line package.

**H11D1
H11D2
H11D3
H11D4
4N38**

FEATURES

- High Voltage
 - H11D1, H11D2, $BV_{CER} = 300\text{ V}$
 - H11D3, H11D4, $BV_{CER} = 200\text{ V}$
- High isolation voltage
 - 5300 VAC RMS - 1 minute
 - 7500 VAC PEAK - 1 minute
- Underwriters Laboratory (UL) recognized File# E90700

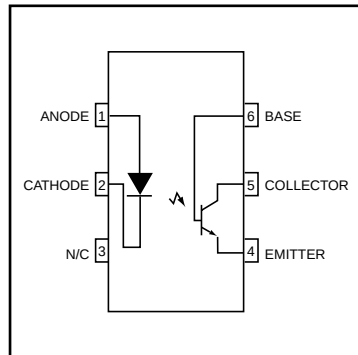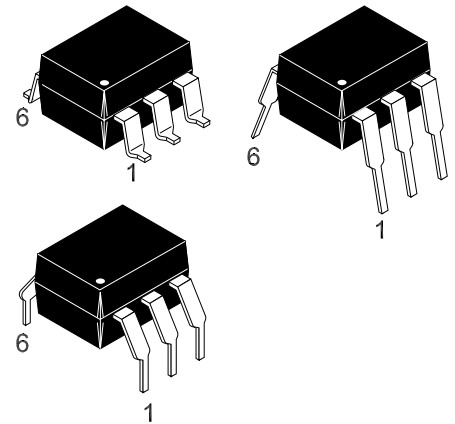

APPLICATIONS

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs
- Appliance sensor systems
- Industrial controls

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Units
TOTAL DEVICE			
Storage Temperature	T_{STG}	-55 to +150	°C
Operating Temperature	T_{OPR}	-55 to +100	°C
Lead Solder Temperature	T_{SOL}	260 for 10 sec	°C
Total Device Power Dissipation @ $T_A = 25^\circ\text{C}$	P_D	260	mW
Derate above 25°C		3.5	mW/°C
EMITTER			
*Forward DC Current	I_F	80	mA
*Reverse Input Voltage	V_R	6.0	V
*Forward Current - Peak (1μs pulse, 300pps)	$I_F(pk)$	3.0	A
*LED Power Dissipation @ $T_A = 25^\circ\text{C}$	P_D	150	mW
Derate above 25°C		1.41	mW/°C

H11D1, H11D2, H11D3, H11D4, 4N38

ABSOLUTE MAXIMUM RATINGS (Cont.)

Parameter	Symbol	Value	Units
DETECTOR			
*Power Dissipation @ $T_A = 25^\circ\text{C}$	P_D	300	mW
Derate linearly above 25°C		4.0	mW/ $^\circ\text{C}$
*Collector to Emitter Voltage	V_{CER}	H11D1 - H11D2 H11D3 - H11D4 4N38	300 200 80
*Collector Base Voltage		H11D1 - H11D2 H11D3 - H11D4 4N38	300 200 80
*Emitter to Collector Voltage		H11D1 - H11D2 H11D3 - H11D4	7
Collector Current (Continuous)		100	mA

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise specified.)

INDIVIDUAL COMPONENT CHARACTERISTICS

Characteristic	Test Conditions	Symbol	Device	Min	Typ**	Max	Unit
EMITTER							
*Forward Voltage	($I_F = 10\text{ mA}$)	V_F	ALL		1.15	1.5	V
Forward Voltage Temp. Coefficient		$\frac{\Delta V_F}{\Delta T_A}$	ALL		-1.8		mV/ $^\circ\text{C}$
Reverse Breakdown Voltage	($I_R = 10\text{ }\mu\text{A}$)	BV_R	ALL	6	25		V
Junction Capacitance	($V_F = 0\text{ V}$, $f = 1\text{ MHz}$)	C_J	ALL		50		pF
	($V_F = 1\text{ V}$, $f = 1\text{ MHz}$)		ALL		65		pF
*Reverse Leakage Current	($V_R = 6\text{ V}$)	I_R	ALL		0.05	10	μA
DETECTOR	($R_{BE} = 1\text{ M}\Omega$)						
*Breakdown Voltage Collector to Emitter	(No R_{BE}) ($I_C = 1.0\text{ mA}$)	BV_{CER}	H11D1/2	300			V
			H11D3/4	200			
		BV_{CEO}	4N38	80			
*Collector to Base	($I_C = 100\text{ }\mu\text{A}$, $I_F = 0$)	BV_{CBO}	H11D1/2	300			
			H11D3/4	200			
			4N38	80			
Emitter to Base	($I_E = 100\text{ }\mu\text{A}$, $I_F = 0$)	BV_{EBO}	4N38	7			
Emitter to Collector		BV_{ECO}	ALL	7	10		
*Leakage Current Collector to Emitter ($R_{BE} = 1\text{ M}\Omega$)	($V_{CE} = 200\text{ V}$, $I_F = 0$, $T_A = 25^\circ\text{C}$)	I_{CER}	H11D1/2			100	nA
	($V_{CE} = 200\text{ V}$, $I_F = 0$, $T_A = 100^\circ\text{C}$)					250	μA
	($V_{CE} = 100\text{ V}$, $I_F = 0$, $T_A = 25^\circ\text{C}$)		H11D3/4			100	nA
	($V_{CE} = 100\text{ V}$, $I_F = 0$, $T_A = 100^\circ\text{C}$)					250	μA
	(No R_{BE}) ($V_{CE} = 60\text{ V}$, $I_F = 0$, $T_A = 25^\circ\text{C}$)	I_{CEO}	4N38			50	nA

Notes

* Parameters meet or exceed JEDEC registered data (for 4N38 only)

** All typical values at $T_A = 25^\circ\text{C}$

H11D1, H11D2, H11D3, H11D4, 4N38

TRANSFER CHARACTERISTICS

DC Characteristic	Test Conditions	Symbol	Device	Min	Typ**	Max	Unit	
EMITTER Current Transfer Ratio Collector to Emitter	(I _F = 10 mA, V _{CE} = 10 V) (R _{BE} = 1 MΩ)	CTR	H11D1 H11D2 H11D3	2 (20)			mA (%)	
			H11D4	1 (10)				
	(I _F = 10 mA, V _{CE} = 10 V)		4N38	2 (20)				
	*Saturation Voltage	(I _F = 10 mA, I _C = 0.5 mA) (R _{BE} = 1 MΩ)	V _{CE (SAT)}	H11D1/2/3/4		0.1	0.40	V
(I _F = 20 mA, I _C = 4 mA)		4N38				1.0		

TRANSFER CHARACTERISTICS

Characteristic	Test Conditions	Symbol	Device	Min	Typ**	Max	Unit
SWITCHING TIMES Non-Saturated Turn-on Time Turn-off Time	$(V_{CE} = 10 \text{ V}, I_{CE} = 2 \text{ mA})$	t_{on}	ALL		5		μs
	$(R_L = 100 \Omega)$	t_{off}	ALL		5		

ISOLATION CHARACTERISTICS

Characteristic	Test Conditions	Symbol	Device	Min	Typ**	Max	Unit
Isolation Voltage	$(I_{I-O} \leq 1 \mu\text{A}, 1 \text{ min.})$	V_{ISO}	ALL	5300			$(V_{AC(RMS)})$
				7500			$(V_{AC(PEAK)})$
Isolation Resistance	$(V_{I-O} = 500 \text{ VDC})$	R_{ISO}	ALL	10^{11}			Ω
Isolation Capacitance	$(f = 1 \text{ MHz})$	C_{ISO}	ALL		0.5		pF

Notes

* Parameters meet or exceed JEDEC registered data (for 4N38 only)

** All typical values at $T_A = 25^\circ\text{C}$

Fig.1 LED Forward Voltage vs. Forward Current


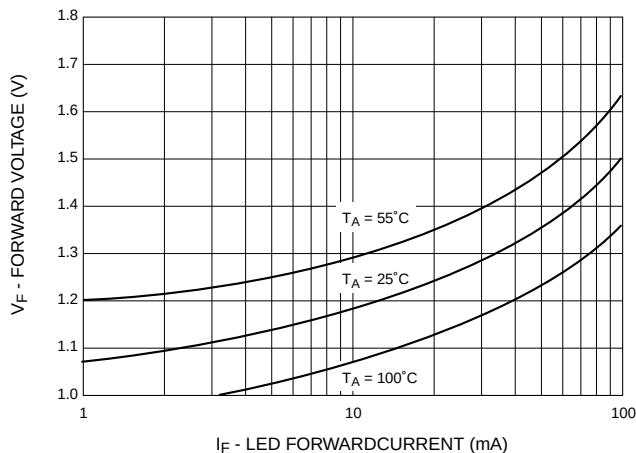


Fig.2 Normalized Output Characteristics

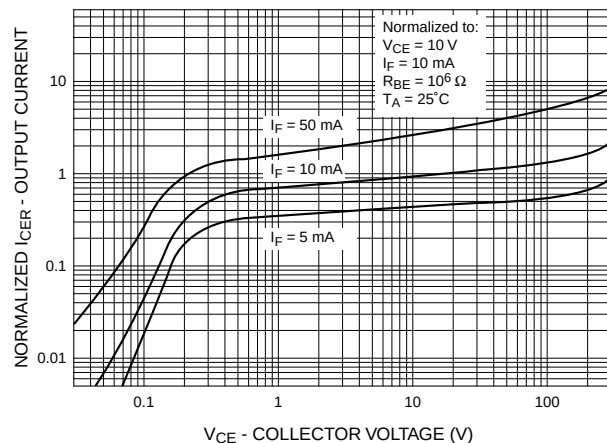

H11D1, H11D2, H11D3, H11D4, 4N38

Fig.3 Normalized Output Current vs. LED Input Current

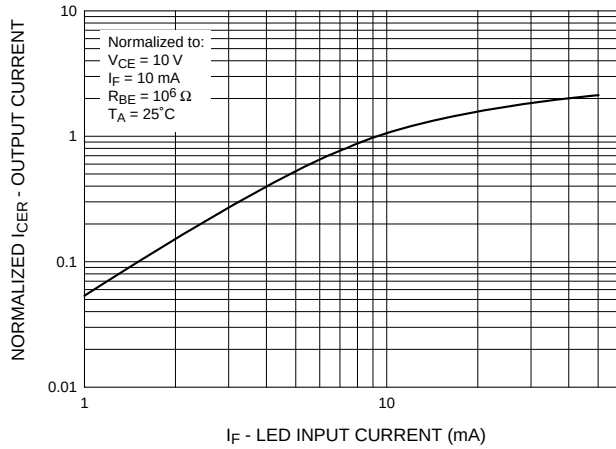


Fig.4 Normalized Output Current vs. Temperature



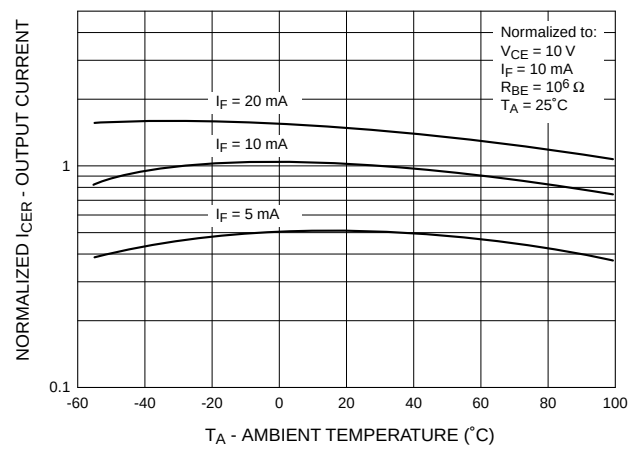



Fig.5 Normalized Dark Current vs. Ambient Temperature

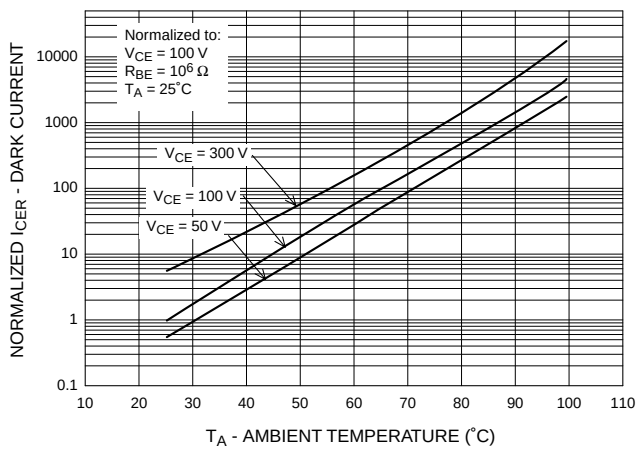

Normalized Collector-Base Current vs. Temperature

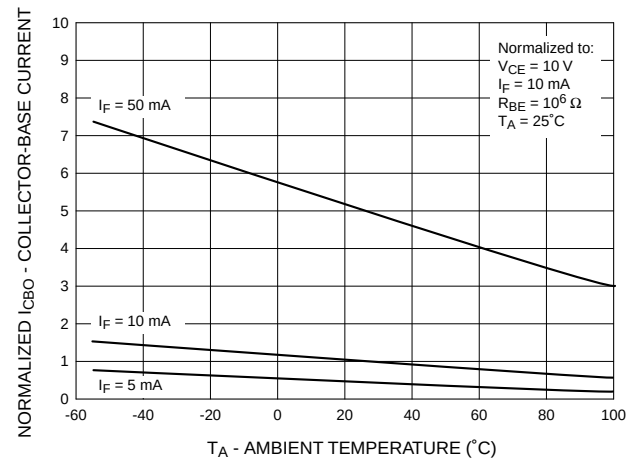

Package Dimensions (Through Hole)

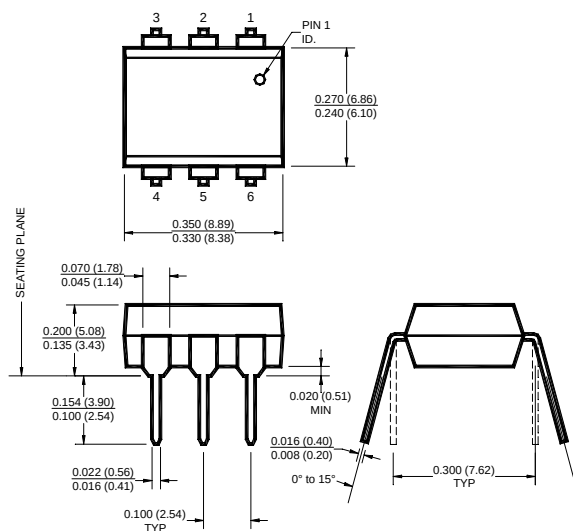

The drawing illustrates the mechanical specifications of a 6-pin connector. It includes three views: a top view, a side view, and a cross-sectional view.

Top View Dimensions:

- Overall width: 0.350 (8.89) / 0.330 (8.38)
- Pin pitch (center-to-center): 0.070 (1.78) / 0.045 (1.14)
- Overall height: 0.270 (6.86) / 0.240 (6.10)
- Pin 1 ID. (Internal Diameter) is indicated.

Side View Dimensions:

- Overall height: 0.200 (5.08) / 0.165 (4.18)
- Lead height: 0.022 (0.56) / 0.016 (0.41)
- Lead width: 0.020 (0.51) MIN
- Lead pitch: 0.100 (2.54) TYP

Cross-sectional View Dimensions:

- Overall width: 0.300 (7.62) TYP
- Lead height: 0.016 (0.41) / 0.008 (0.20)
- Lead width: 0.016 (0.40) MIN
- Lead pitch: 0.315 (8.00) MIN
- Overall width: 0.405 (10.30) MAX

Lead Coplanarity: 0.004 (0.10) MAX

The drawing illustrates the mechanical specifications of a 6-pin connector. The top view shows a rectangular body with a central opening and six pins arranged in two rows of three. The pins are numbered 1 through 6. The front view shows the profile of the connector, including the seating plane and the pin heights. The side view shows the angled pins and the overall width.

Top View Dimensions:

- Pin 1 ID: 0.270 (6.86)
- Pin 2 ID: 0.240 (6.10)
- Pin 3 ID: 0.350 (8.89)
- Pin 4 ID: 0.330 (8.38)
- Pin 5 ID: 0.350 (8.89)
- Pin 6 ID: 0.330 (8.38)

Front View Dimensions:

- Seating Plane: 0.200 (5.08)
- Pin 1 Height: 0.135 (3.43)
- Pin 2 Height: 0.154 (3.90)
- Pin 3 Height: 0.100 (2.54)
- Pin 4 Height: 0.022 (0.56)
- Pin 5 Height: 0.016 (0.41)
- Pin 6 Height: 0.016 (0.41)
- Pin 7 Height: 0.016 (0.41)
- Pin 8 Height: 0.016 (0.41)
- Pin 9 Height: 0.016 (0.41)
- Pin 10 Height: 0.016 (0.41)
- Pin 11 Height: 0.016 (0.41)
- Pin 12 Height: 0.016 (0.41)
- Pin 13 Height: 0.016 (0.41)
- Pin 14 Height: 0.016 (0.41)
- Pin 15 Height: 0.016 (0.41)
- Pin 16 Height: 0.016 (0.41)
- Pin 17 Height: 0.016 (0.41)
- Pin 18 Height: 0.016 (0.41)
- Pin 19 Height: 0.016 (0.41)
- Pin 20 Height: 0.016 (0.41)
- Pin 21 Height: 0.016 (0.41)
- Pin 22 Height: 0.016 (0.41)
- Pin 23 Height: 0.016 (0.41)
- Pin 24 Height: 0.016 (0.41)
- Pin 25 Height: 0.016 (0.41)
- Pin 26 Height: 0.016 (0.41)
- Pin 27 Height: 0.016 (0.41)
- Pin 28 Height: 0.016 (0.41)
- Pin 29 Height: 0.016 (0.41)
- Pin 30 Height: 0.016 (0.41)
- Pin 31 Height: 0.016 (0.41)
- Pin 32 Height: 0.016 (0.41)
- Pin 33 Height: 0.016 (0.41)
- Pin 34 Height: 0.016 (0.41)
- Pin 35 Height: 0.016 (0.41)
- Pin 36 Height: 0.016 (0.41)
- Pin 37 Height: 0.016 (0.41)
- Pin 38 Height: 0.016 (0.41)
- Pin 39 Height: 0.016 (0.41)
- Pin 40 Height: 0.016 (0.41)
- Pin 41 Height: 0.016 (0.41)
- Pin 42 Height: 0.016 (0.41)
- Pin 43 Height: 0.016 (0.41)
- Pin 44 Height: 0.016 (0.41)
- Pin 45 Height: 0.016 (0.41)
- Pin 46 Height: 0.016 (0.41)
- Pin 47 Height: 0.016 (0.41)
- Pin 48 Height: 0.016 (0.41)
- Pin 49 Height: 0.016 (0.41)
- Pin 50 Height: 0.016 (0.41)
- Pin 51 Height: 0.016 (0.41)
- Pin 52 Height: 0.016 (0.41)
- Pin 53 Height: 0.016 (0.41)
- Pin 54 Height: 0.016 (0.41)
- Pin 55 Height: 0.016 (0.41)
- Pin 56 Height: 0.016 (0.41)
- Pin 57 Height: 0.016 (0.41)
- Pin 58 Height: 0.016 (0.41)
- Pin 59 Height: 0.016 (0.41)
- Pin 60 Height: 0.016 (0.41)
- Pin 61 Height: 0.016 (0.41)
- Pin 62 Height: 0.016 (0.41)
- Pin 63 Height: 0.016 (0.41)
- Pin 64 Height: 0.016 (0.41)
- Pin 65 Height: 0.016 (0.41)
- Pin 66 Height: 0.016 (0.41)
- Pin 67 Height: 0.016 (0.41)
- Pin 68 Height: 0.016 (0.41)
- Pin 69 Height: 0.016 (0.41)
- Pin 70 Height: 0.016 (0.41)
- Pin 71 Height: 0.016 (0.41)
- Pin 72 Height: 0.016 (0.41)
- Pin 73 Height: 0.016 (0.41)
- Pin 74 Height: 0.016 (0.41)
- Pin 75 Height: 0.016 (0.41)
- Pin 76 Height: 0.016 (0.41)
- Pin 77 Height: 0.016 (0.41)
- Pin 78 Height: 0.016 (0.41)
- Pin 79 Height: 0.016 (0.41)
- Pin 80 Height: 0.016 (0.41)
- Pin 81 Height: 0.016 (0.41)
- Pin 82 Height: 0.016 (0.41)
- Pin 83 Height: 0.016 (0.41)
- Pin 84 Height: 0.016 (0.41)
- Pin 85 Height: 0.016 (0.41)
- Pin 86 Height: 0.016 (0.41)
- Pin 87 Height: 0.016 (0.41)
- Pin 88 Height: 0.016 (0.41)
- Pin 89 Height: 0.016 (0.41)
- Pin 90 Height: 0.016 (0.41)
- Pin 91 Height: 0.016 (0.41)
- Pin 92 Height: 0.016 (0.41)
- Pin 93 Height: 0.016 (0.41)
- Pin 94 Height: 0.016 (0.41)
- Pin 95 Height: 0.016 (0.41)
- Pin 96 Height: 0.016 (0.41)
- Pin 97 Height: 0.016 (0.41)
- Pin 98 Height: 0.016 (0.41)
- Pin 99 Height: 0.016 (0.41)
- Pin 100 Height: 0.016 (0.41)
- Pin 101 Height: 0.016 (0.41)
- Pin 102 Height: 0.016 (0.41)
- Pin 103 Height: 0.016 (0.41)
- Pin 104 Height: 0.016 (0.41)
- Pin 105 Height: 0.016 (0.41)
- Pin 106 Height: 0.016 (0.41)
- Pin 107 Height: 0.016 (0.41)
- Pin 108 Height: 0.016 (0.41)
- Pin 109 Height: 0.016 (0.41)
- Pin 110 Height: 0.016 (0.41)
- Pin 111 Height: 0.016 (0.41)
- Pin 112 Height: 0.016 (0.41)
- Pin 113 Height: 0.016 (0.41)
- Pin 114 Height: 0.016 (0.41)
- Pin 115 Height: 0.016 (0.41)
- Pin 116 Height: 0.016 (0.41)
- Pin 117 Height: 0.016 (0.41)
- Pin 118 Height: 0.016 (0.41)
- Pin 119 Height: 0.016 (0.41)
- Pin 120 Height: 0.016 (0.41)
- Pin 121 Height: 0.016 (0.41)
- Pin 122 Height: 0.016 (0.41)
- Pin 123 Height: 0.016 (0.41)
- Pin 124 Height: 0.016 (0.41)
- Pin 125 Height: 0.016 (0.41)
- Pin 126 Height: 0.016 (0.41)
- Pin 127 Height: 0.016 (0.41)
- Pin 128 Height: 0.016 (0.41)
- Pin 129 Height: 0.016 (0.41)
- Pin 130 Height: 0.016 (0.41)
- Pin 131 Height: 0.016 (0.41)
- Pin 132 Height: 0.016 (0.41)
- Pin 133 Height: 0.016 (0.41)
- Pin 134 Height: 0.016 (0.41)
- Pin 135 Height: 0.016 (0.41)
- Pin 136 Height: 0.016 (0.41)
- Pin 137 Height: 0.016 (0.41)
- Pin 138 Height: 0.016 (0.41)
- Pin 139 Height: 0.016 (0.41)
- Pin 140 Height: 0.016 (0.41)
- Pin 141 Height: 0.016 (0.41)
- Pin 142 Height: 0.016 (0.41)
- Pin 143 Height: 0.016 (0.41)
- Pin 144 Height: 0.016 (0.41)
- Pin 145 Height: 0.016 (0.41)
- Pin 146 Height: 0.016 (0.41)
- Pin 147 Height: 0.016 (0.41)
- Pin 148 Height: 0.016 (0.41)
- Pin 149 Height: 0.016 (0.41)
- Pin 150 Height: 0.016 (0.41)
- Pin 151 Height: 0.016 (0.41)
- Pin 152 Height: 0.016 (0.41)
- Pin 153 Height: 0.016 (0.41)
- Pin 154 Height: 0.016 (0.41)
- Pin 155 Height: 0.016 (0.41)
- Pin 156 Height: 0.016 (0.41)
- Pin 157 Height: 0.016 (0.41)
- Pin 158 Height: 0.016 (0.41)
- Pin 159 Height: 0.016 (0.41)
- Pin 160 Height: 0.016 (0.41)
- Pin 161 Height: 0.016 (0.41)
- Pin 162 Height: 0.016 (0.41)
- Pin 163 Height: 0.016 (0.


All dimensions are in inches (millimeters)

H11D1, H11D2, H11D3, H11D4, 4N38

ORDERING INFORMATION

Option	Order Entry Identifier	Description
S	.S	Surface Mount Lead Bend
SD	.SD	Surface Mount; Tape and reel
W	.W	0.4" Lead Spacing
300	.300	VDE 0884
300W	.300W	VDE 0884, 0.4" Lead Spacing
3S	.3S	VDE 0884, Surface Mount
3SD	.3SD	VDE 0884, Surface Mount, Tape & Reel


QT Carrier Tape Specifications ("D" Taping Orientation)

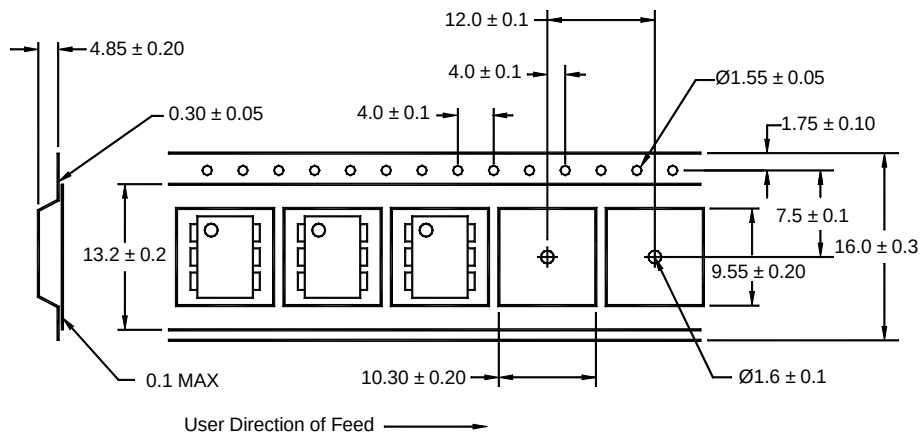

NOTE


All dimensions are in millimeters

MARKING INFORMATION

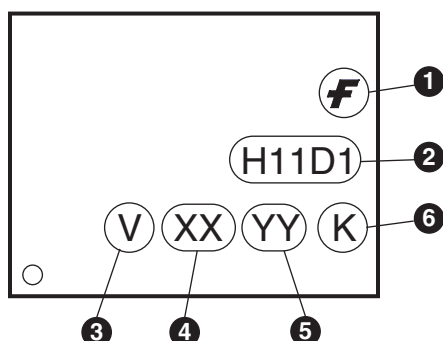

Definitions	
1	Fairchild logo
2	Device number
3	VDE mark (Note: Only appears on parts ordered with VDE option – See order entry table)
4	Two digit year code, e.g., '03'
5	Two digit work week ranging from '01' to '53'
6	Assembly package code

Reflow Profile (Black Package, No Suffix)

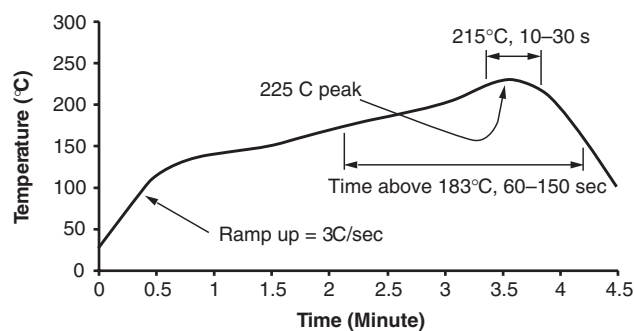

- Peak reflow temperature: 225°C (package surface temperature)
- Time of temperature higher than 183°C for 60–150 seconds
- One time soldering reflow is recommended

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FAST®	ISOPLANAR™	Power247™	Stealth™
ActiveArray™	FASTr™	LittleFET™	PowerEdge™	SuperFET™
Bottomless™	FPS™	MICROCOUPLER™	PowerSaver™	SuperSOT™-3
CoolFET™	FRFET™	MicroFET™	PowerTrench®	SuperSOT™-6
CROSSVOLT™	GlobalOptoisolator™	MicroPak™	QFET®	SuperSOT™-8
DOMETM	GTO™	MICROWIRE™	QST™	SyncFET™
EcoSPARK™	HiSeC™	MSX™	QT Optoelectronics™	TinyLogic®
E ² CMOS™	IC™	MSXPro™	Quiet Series™	TINYOPTO™
EnSigna™	i-Lo™	OCX™	RapidConfigure™	TruTranslation™
FACT™	ImpliedDisconnect™	OCXPro™	RapidConnect™	UHC™
FACT Quiet Series™		OPTOLOGIC®	µSerDes™	UltraFET®
Across the board. Around the world.™		OPTOPLANAR™	SILENT SWITCHER®	VCX™
The Power Franchise®		PACMAN™	SMART START™	
Programmable Active Droop™		POP™	SPM™	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.