

Specification Status: Released

Maximum Electrical Rating

Voltage: 30V_{DC}
Current: 10A

Notes:

1. All terminations are tin/lead plated.
2. Devices can be wave soldered.
3. Drawing not to scale

Marking:



PART IDENTIFICATION

MANUFACTURER'S MARK

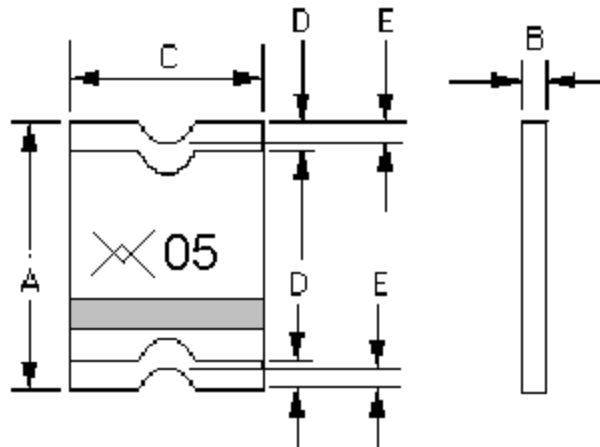


TABLE I. DIMENSIONS:

	A		B		C		D	E
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MIN
mm:	3.00	3.43	0.50	0.85	2.35	2.80	0.25	0.20
in.*	(0.118)	(0.135)	(0.019)	(0.034)	(0.092)	(0.111)	(0.010)	(0.008)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

CURRENT RATINGS**						TIME TO TRIP **	RESISTANCE VALUES		TRIPPED-STATE POWER DISSIPATION**
AMPERES AT 0°C		AMPERES AT 20°C		AMPERES AT 60°C		SECONDS AT 20°C, 0.25A MAX	OHMS AT 20°C		WATTS AT 20°C, 30V MAX
HOLD	TRIP	HOLD	TRIP	HOLD	TRIP		MIN	MAX*	
0.060	0.180	0.050	0.150	0.030	0.090	1.5	3.6	50.0	1.0

*Maximum resistance is measured 1 hour after reflow.

** Values specified were determined using PCB's with 0.030"X1.5 ounce copper traces.

Reference Documents: PS300, E. N. SMD1.0x

Precedence: This specification takes precedence over documents referenced herein.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.