MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
V3L–2170
CQ–X1434

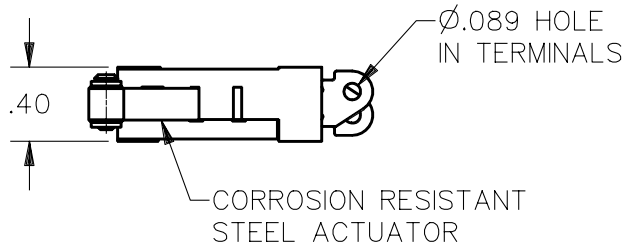

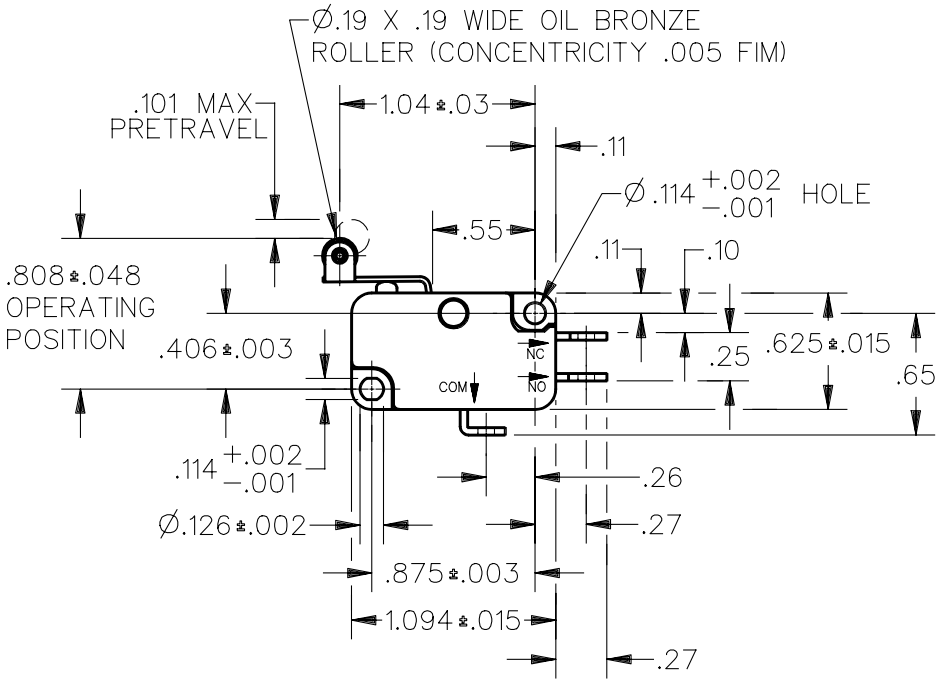

NOTE
1 – RESTRICTED LISTING

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL / DO NOT SCALE PRINT
OPERATING FORCE – – – 45 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
RELEASE FORCE – – – 4 GRAMS MIN	L131 10A 1/4HP 125 OR 250 VAC 1/2A 125 VDC, 1/4A 250 VDC 3A 125 VAC "L"	ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL – – – .024 MAX		TWO PLACE (.00) ±.015
OVERTRAVEL – – – – – – .058 MIN		THREE PLACE (.000) ±.005
RELEASE TRAVEL – – – – – .014 MIN		ANGLES ±
		WEIGHT

CATALOG LISTING V3L–2170 PAGE 1 OF 1
RELEASE NO. PR–4011
REPLACES
ISSUE 3
CHECK
CHECK
CHECK
CHECK
DRAWN DCS 15 MAR 96
DDM/CAD

REVISIONS
A CO 82571 DCS 15 MAR 96