



No. of contacts	Contact arrangement	Press-fit technology – Performance level II	
		PCB thckn. 1.6 – 2.8	PCB thickness > 2.8
		Part number	
176		245-11010-05	245-11010-15
220		245-11310-05	245-11310-15

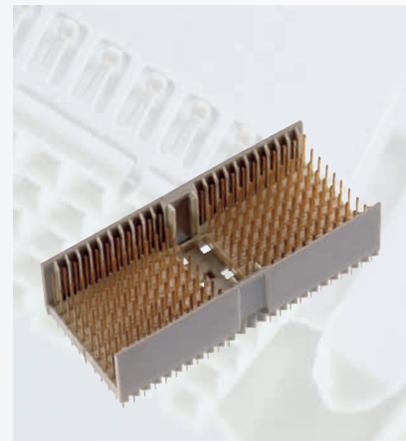


<p>On request</p> <ul style="list-style-type: none"> – Performance level I or customer-specific – Contact arrangement (see page 77) 	<p>Accessories</p> <ul style="list-style-type: none"> – Press-fit tool (see page 198) – Support tool (see page 199) – Coding keys (see page 68)
--	---

<p>Cross reference</p> <ul style="list-style-type: none"> – Pin lengths (see page 34)

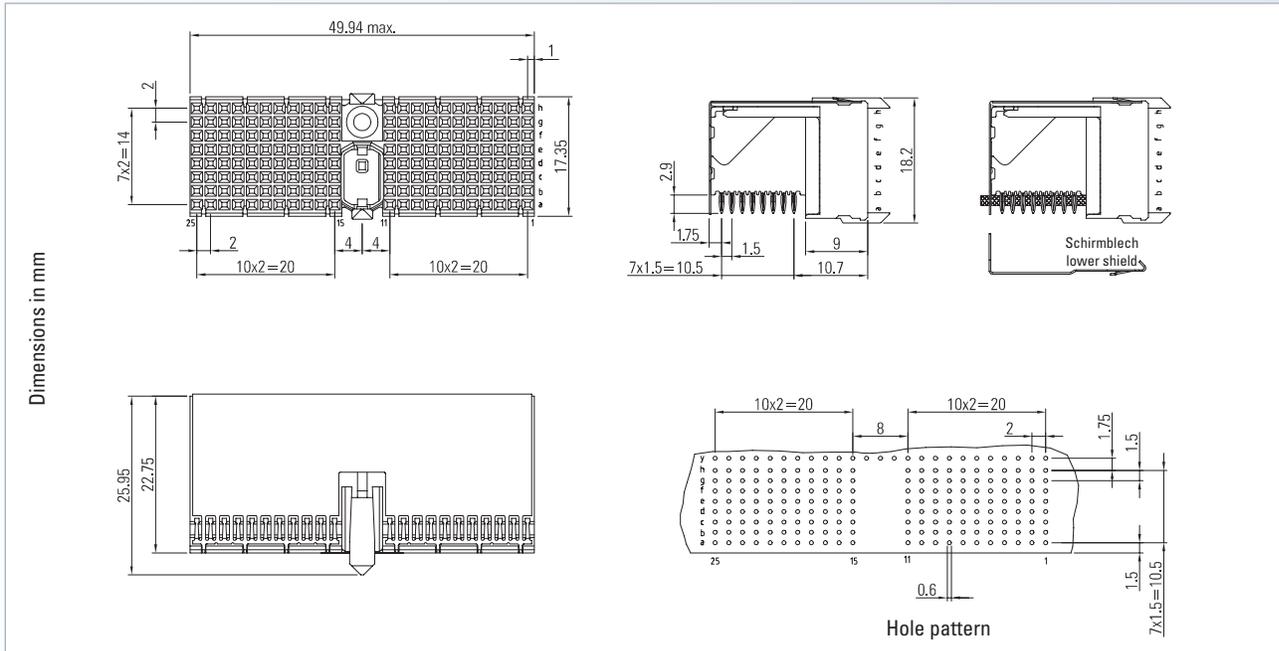

No. of contacts	Description	Press-fit technology
		Performance level II
		Part number
176	Without shielding	246-11000-15
176	With shielding	246-11300-15
–	Lower shield	246-11600-1

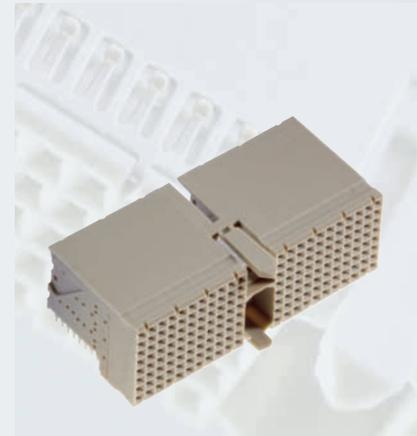

On request

- Performance level I or customer-specific

Accessories

- Press-fit tool (see page 202)
- Support tool (see page 203)
- Coding keys (see page 68)