MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING

2NT1-TM SERIES CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN △4 SIDE (1-2, 4-5)	(1-2, 4-5)	KEYWAY (2-3, 5-6)	ELECTRICAL DATA
2NT1-1-TM	ON	OFF	ON	L191 15A 125, 250, 277 VAC 1/2HP 125 VAC 1HP 250, 277 VAC 5A 125 VAC "L"
2NT1-2-TM	OFF	NONE	ON	
2NT1-3-TM	ON	NONE	ON	
2NT1-21-TM	NONE	OFF	ON	
2NT1-4-TM	MOM OFF	NONE	ON	L192 10A 125, 250, 277 VAC 1/4HP 125 VAC, 1/2HP 250, 277 VAC 3A 125 VAC "L"
2NT1-5-TM	MOM ON	OFF	ON	
2NT1-6-TM	MOM ON	NONE	OFF	
2NT1-7-TM	MOM ON	OFF	MOM ON	
2NT1-8-TM	MOM ON	NONE	ON	
2NT1-51-TM	NONE	ON	MOM ON	
2NT1-61-TM	MOM ON	OFF	NONE	



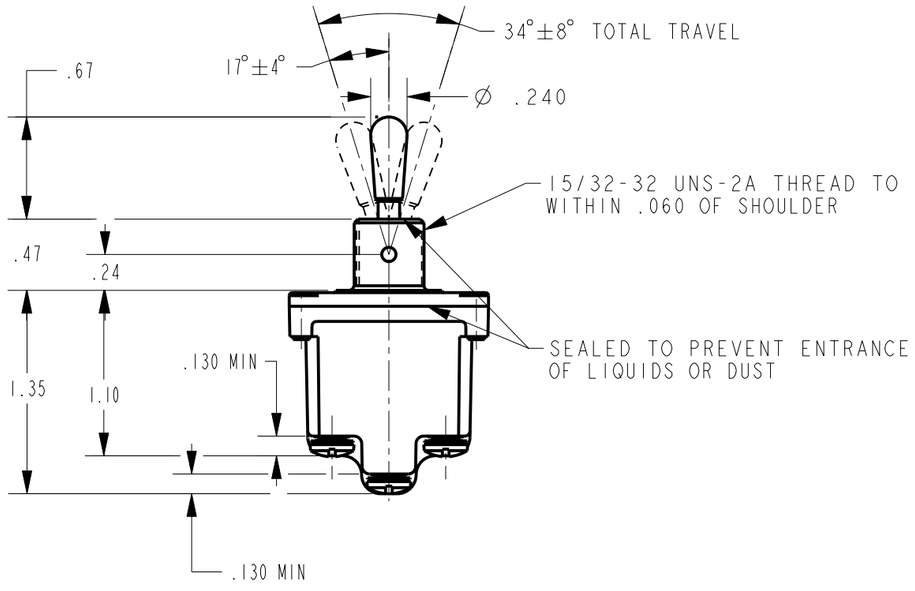

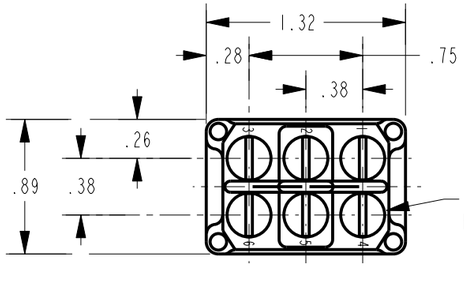

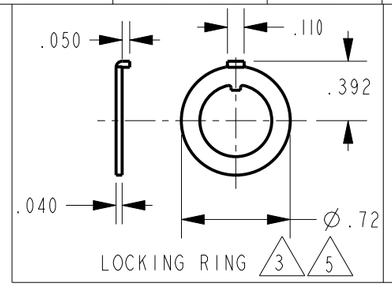

LOCKING RING △3 △5



LOCKWASHER △3 △5



2X HEX NUT △3 △5

NOTES
1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
△3 FURNISHED UNASSEMBLED
△4 APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
△5 NH SUFFIX MUST BE ADDED TO SPECIFY NO HARDWARE (EX 2NT1-1-TM-NH

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .12 LBS APPROX

ANSI Y14.5M-1982 APPLIES

CATALOG LIST 2NT1-TM SERIES CHART 1
PAGE 1 OF 1
ISSUE 1
REVISIONS
REPLACES
RELEASE NO. 203206
CHECK
11JUN01
SAV
CHECK
11JUN01
PTC/CAD 2D
DRAWN GJW 11JUN01