



### FEATURES

- RoHS compliant
- 2:1 Wide range voltage input
- Continuous short circuit protection with current foldback
- Operating temperature range  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$
- 0.2% Typical load regulation
- 1kVDC Isolation
- Efficiency from 67%
- 5V, 12V, 24V & 48V Nominal input
- 5V, 12V & 15V outputs
- Power density  $0.94\text{W}/\text{cm}^3$
- Optional remote On/Off
- UL 94V-0 Package materials
- No electrolytic capacitors
- Low noise
- Custom solutions available

### PRODUCT OVERVIEW

The NDX series of DC/DC converters provide up to 7.5W of output power with single or dual outputs. Unbalanced loading capability with an optional input control pin. Input voltages of 5V (4.5V to 9V), 12V (9V to 18V), 24V (18V to 36V), and 48V (36V to 75V) with outputs of 5V, 12V or 15V provided. The device is housed in a 5 sided metal case potted with UL 94V-0 rated material. The pinout is an industry standard 5 pin arrangement with an additional optional control pin.

### SELECTION GUIDE

| Order Code <sup>1</sup> | Nominal Input Voltage | Output Voltage | Output Current at 25% Load <sup>2</sup> | Output Current at 100% Load <sup>2</sup> | Input Current at 0% Load | Input Current at 100% Load | Input Current at shutdown | Ripple & Noise <sup>3</sup> (Typ.) | Ripple & Noise <sup>3</sup> (Max.) | Efficiency (Min.) | Isolation Capacitance | Closest Alternative (click for data sheet) |
|-------------------------|-----------------------|----------------|-----------------------------------------|------------------------------------------|--------------------------|----------------------------|---------------------------|------------------------------------|------------------------------------|-------------------|-----------------------|--------------------------------------------|
|                         | V                     | V              | mA                                      | mA                                       | mA                       | A                          | mA                        | mVp-p                              | mVp-p                              | %                 | pF                    | NCS6 Series                                |
| NDXS0512C               | 5                     | 12             | 156                                     | 625                                      | 42                       | 2.02                       |                           | 79                                 | 110                                | 68                | 55                    |                                            |
| NDXS0512EC              | 5                     | 12             | 156                                     | 625                                      | 42                       | 2.02                       | 0.48                      | 79                                 | 110                                | 68                | 55                    |                                            |
| NDXS0515C               | 5                     | 15             | 125                                     | 500                                      | 46.2                     | 2.02                       |                           | 55                                 | 80                                 | 67                | 49                    |                                            |
| NDXS0515EC              | 5                     | 15             | 125                                     | 500                                      | 46.2                     | 2.02                       | 0.46                      | 55                                 | 80                                 | 67                | 49                    |                                            |
| NDXS1212C               | 12                    | 12             | 156                                     | 625                                      | 19.4                     | 0.77                       |                           | 31                                 | 50                                 | 77                | 56                    | NCS6S1212C                                 |
| NDXS1212EC              | 12                    | 12             | 156                                     | 625                                      | 19.4                     | 0.77                       | 0.51                      | 31                                 | 50                                 | 77                | 56                    | NCS6S1212C                                 |
| NDXS1215C               | 12                    | 15             | 125                                     | 500                                      | 27                       | 0.77                       |                           | 23                                 | 40                                 | 77                | 53                    | NCS6S1215C                                 |
| NDXS1215EC              | 12                    | 15             | 125                                     | 500                                      | 27                       | 0.77                       | 0.51                      | 23                                 | 40                                 | 77                | 53                    | NCS6S1215C                                 |
| NDXS2412C               | 24                    | 12             | 156                                     | 625                                      | 13.8                     | 0.38                       |                           | 24                                 | 50                                 | 80                | 55                    | NCS6S1212C                                 |
| NDXS2412EC              | 24                    | 12             | 156                                     | 625                                      | 13.8                     | 0.38                       | 0.53                      | 24                                 | 50                                 | 80                | 55                    | NCS6S1212C                                 |
| NDXS2415C               | 24                    | 15             | 125                                     | 500                                      | 20.6                     | 0.37                       |                           | 24                                 | 45                                 | 80                | 56                    | NCS6S1215C                                 |
| NDXS2415EC              | 24                    | 15             | 125                                     | 500                                      | 20.6                     | 0.37                       | 0.53                      | 24                                 | 45                                 | 80                | 56                    | NCS6S1215C                                 |
| NDXS4812C               | 48                    | 12             | 156                                     | 625                                      | 8.8                      | 0.187                      |                           | 20                                 | 40                                 | 81                | 58                    | NCS6S4812C                                 |
| NDXS4812EC              | 48                    | 12             | 156                                     | 625                                      | 8.8                      | 0.187                      | 0.47                      | 20                                 | 40                                 | 81                | 58                    | NCS6S4812C                                 |
| NDXS4815C               | 48                    | 15             | 125                                     | 500                                      | 10.2                     | 0.187                      |                           | 20                                 | 40                                 | 82                | 58                    | NCS6S4815C                                 |
| NDXS4815EC              | 48                    | 15             | 125                                     | 500                                      | 10.2                     | 0.187                      | 0.48                      | 20                                 | 40                                 | 82                | 58                    | NCS6S4815C                                 |
| NDXD0505C               | 5                     | $\pm 5$        | $\pm 150$                               | $\pm 600$                                | 19.4                     | 1.83                       |                           | 20                                 | 40                                 | 67                | 40                    |                                            |
| NDXD0505EC              | 5                     | $\pm 5$        | $\pm 150$                               | $\pm 600$                                | 19.4                     | 1.83                       | 0.075                     | 20                                 | 40                                 | 67                | 40                    |                                            |
| NDXD0512C               | 5                     | $\pm 12$       | $\pm 78.1$                              | $\pm 312$                                | 33.4                     | 2.15                       |                           | 21                                 | 45                                 | 69                | 42                    |                                            |
| NDXD0512EC              | 5                     | $\pm 12$       | $\pm 78.1$                              | $\pm 312$                                | 33.4                     | 2.15                       | 0.075                     | 21                                 | 45                                 | 69                | 42                    |                                            |
| NDXD0515C               | 5                     | $\pm 15$       | $\pm 62.5$                              | $\pm 250$                                | 41.8                     | 2.69                       |                           | 15                                 | 35                                 | 71                | 43                    |                                            |
| NDXD0515EC              | 5                     | $\pm 15$       | $\pm 62.5$                              | $\pm 250$                                | 41.8                     | 2.69                       | 0.075                     | 15                                 | 35                                 | 71                | 43                    |                                            |
| NDXD1205C               | 12                    | $\pm 5$        | $\pm 187$                               | $\pm 750$                                | 13.2                     | 0.89                       |                           | 20                                 | 45                                 | 73                | 36                    | NCS6D1205C                                 |
| NDXD1205EC              | 12                    | $\pm 5$        | $\pm 187$                               | $\pm 750$                                | 13.2                     | 0.89                       | 0.176                     | 20                                 | 45                                 | 73                | 36                    | NCS6D1205C                                 |
| NDXD1212C               | 12                    | $\pm 12$       | $\pm 78.1$                              | $\pm 312$                                | 15                       | 0.86                       |                           | 25                                 | 55                                 | 78                | 41                    | NCS6D1212C                                 |
| NDXD1212EC              | 12                    | $\pm 12$       | $\pm 78.1$                              | $\pm 312$                                | 15                       | 0.86                       | 0.159                     | 25                                 | 55                                 | 78                | 41                    | NCS6D1212C                                 |
| NDXD1215C               | 12                    | $\pm 15$       | $\pm 62.5$                              | $\pm 250$                                | 17                       | 0.86                       |                           | 30                                 | 60                                 | 79                | 41                    | NCS6D1215C                                 |
| NDXD1215EC              | 12                    | $\pm 15$       | $\pm 62.5$                              | $\pm 250$                                | 17                       | 0.86                       | 0.175                     | 30                                 | 60                                 | 79                | 41                    | NCS6D1215C                                 |
| NDXD2405C               | 24                    | $\pm 5$        | $\pm 187$                               | $\pm 750$                                | 4.2                      | 0.402                      |                           | 35                                 | 60                                 | 75                | 58                    | NCS6D1205C                                 |
| NDXD2405EC              | 24                    | $\pm 5$        | $\pm 187$                               | $\pm 750$                                | 4.2                      | 0.402                      | 0.15                      | 35                                 | 60                                 | 75                | 58                    | NCS6D1205C                                 |
| NDXD2412C               | 24                    | $\pm 12$       | $\pm 78.1$                              | $\pm 312$                                | 6.3                      | 0.38                       |                           | 25                                 | 55                                 | 81                | 56                    | NCS6D1212C                                 |
| NDXD2412EC              | 24                    | $\pm 12$       | $\pm 78.1$                              | $\pm 312$                                | 6.3                      | 0.38                       | 0.4                       | 25                                 | 55                                 | 81                | 56                    | NCS6D1212C                                 |
| NDXD2415C               | 24                    | $\pm 15$       | $\pm 62.5$                              | $\pm 250$                                | 7                        | 0.38                       |                           | 30                                 | 60                                 | 82                | 56                    | NCS6D1215C                                 |
| NDXD2415EC              | 24                    | $\pm 15$       | $\pm 62.5$                              | $\pm 250$                                | 7                        | 0.38                       | 0.4                       | 30                                 | 60                                 | 82                | 56                    | NCS6D1215C                                 |
| NDXD4805C               | 48                    | $\pm 5$        | $\pm 187$                               | $\pm 750$                                | 3.6                      | 0.198                      |                           | 20                                 | 40                                 | 77                | 61                    | NCS6D4805C                                 |
| NDXD4805EC              | 48                    | $\pm 5$        | $\pm 187$                               | $\pm 750$                                | 3.6                      | 0.198                      | 0.08                      | 20                                 | 40                                 | 77                | 61                    | NCS6D4805C                                 |
| NDXD4812C               | 48                    | $\pm 12$       | $\pm 78.1$                              | $\pm 312$                                | 5.9                      | 0.19                       |                           | 25                                 | 45                                 | 82                | 57                    | NCS6D4812C                                 |
| NDXD4812EC              | 48                    | $\pm 12$       | $\pm 78.1$                              | $\pm 312$                                | 5.9                      | 0.19                       | 0.5                       | 25                                 | 45                                 | 82                | 57                    | NCS6D4812C                                 |
| NDXD4815C               | 48                    | $\pm 15$       | $\pm 62.5$                              | $\pm 250$                                | 5.9                      | 0.19                       |                           | 22                                 | 55                                 | 82                | 58                    | NCS6D4815C                                 |
| NDXD4815EC              | 48                    | $\pm 15$       | $\pm 62.5$                              | $\pm 250$                                | 5.9                      | 0.19                       | 0.5                       | 22                                 | 55                                 | 82                | 58                    | NCS6D4815C                                 |

1. Suffix 'EC' indicates optional CTRL pin is fitted, as indicated in the mechanical dimensions section.

2. Please refer to minimum load application notes section on page 4.

3. See ripple & noise characterisation method.

All specifications typical at  $T_A = 25^{\circ}\text{C}$ , with recommended input/output capacitors (refer to application note), nominal input voltage and rated output current unless otherwise specified.



| INPUT CHARACTERISTICS       |                                                          |                                     |      |      |      |        |
|-----------------------------|----------------------------------------------------------|-------------------------------------|------|------|------|--------|
| Parameter                   | Conditions                                               |                                     | Min. | Typ. | Max. | Units  |
| Voltage range               | 5V input types                                           |                                     | 4.5  | 5    | 9    | V      |
|                             | 12V input types                                          |                                     | 9    | 12   | 18   |        |
|                             | 24V input types                                          |                                     | 18   | 24   | 36   |        |
|                             | 48V input types                                          |                                     | 36   | 48   | 75   |        |
| Reflected ripple current    | Dual outputs                                             | 5V input types with 100μF at input  |      | 70   |      | mA p-p |
|                             |                                                          | 12V input types with 100μF at input |      | 18   |      |        |
|                             |                                                          | 24V input types with 10μF at input  |      | 90   |      |        |
|                             |                                                          | 48V input types with 10μF at input  |      | 80   |      |        |
|                             | Single outputs                                           | 5V input types with 100μF at input  |      | 115  |      |        |
|                             |                                                          | 12V input types with 100μF at input |      | 60   |      |        |
|                             |                                                          | 24V input types with 10μF at input  |      | 50   |      |        |
|                             |                                                          | 48V input types with 10μF at input  |      | 54   |      |        |
| Ripple & noise <sup>1</sup> | BW=20Hz to 300kHz, with external input/output capacitors |                                     |      | 5    | 10   | mVrms  |

| OUTPUT CHARACTERISTICS             |                                                                                                                      |                 |                 |      |      |      |       |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|------|------|------|-------|
| Parameter                          | Conditions                                                                                                           |                 |                 | Min. | Typ. | Max. | Units |
| Rated power                        | NDXx0505 types                                                                                                       |                 |                 |      |      | 6.0  | W     |
|                                    | All other types                                                                                                      |                 |                 |      |      | 7.5  |       |
| Voltage set point accuracy         | With external input/output capacitors                                                                                |                 | 5V & 12V Input  |      | ±3   | ±5   | %     |
|                                    |                                                                                                                      |                 | 24V & 48V Input |      | ±2   | ±5   |       |
| Line regulation                    | Low line to high line, with external input/output capacitors                                                         | Dual output     | 5V & 12V Input  |      | 0.1  | 0.9  | %     |
|                                    |                                                                                                                      |                 | 24V & 48V Input |      | 0.04 | 0.4  |       |
|                                    |                                                                                                                      | Single output   | All types       |      | 0.04 | 0.4  |       |
| Load regulation                    | 25% total load to 100% total load<br>With external input/output capacitors                                           | Dual output     | 5V & 12V input  |      | 0.2  | 0.9  | %     |
|                                    |                                                                                                                      |                 | 24V & 48V input |      | 0.2  | 0.75 |       |
|                                    |                                                                                                                      | Single output   | All types       |      | 0.07 | 0.20 |       |
| Cross regulation<br>(dual outputs) | % voltage change on negative output<br>when positive load varies from 25%<br>to 75% with negative load fixed at 100% | 5V & 12V input  | 5V output       |      | 3.8  | 6    | %     |
|                                    |                                                                                                                      |                 | 12V, 15V output |      | 1.5  | 5    |       |
|                                    |                                                                                                                      | 24V & 48V input | 5V output       |      | 2.5  | 7    |       |
|                                    |                                                                                                                      |                 | 12V, 15V output |      | 2.5  | 5    |       |

| ABSOLUTE MAXIMUM RATINGS                                                     |                                |                                  |
|------------------------------------------------------------------------------|--------------------------------|----------------------------------|
| Short-circuit protection<br>(Max. case temperature rise 95°C above ambient)  | 12V, 15V outputs               | Continuous                       |
|                                                                              | 5V output, VIN = nominal, 25°C | Continuous                       |
| Lead temperature 1.0mm from case for 10 seconds (to JEDEC JESD22-B106 ISS C) |                                | 260°C                            |
| Minimum output load for specification <sup>2</sup>                           |                                | 25% of rated load on each output |
| Control pin input voltage                                                    |                                | 7V                               |
| Input voltage, NDXD05,                                                       |                                | 10V                              |
| Input voltage, NDXD12, NDXS12 types                                          |                                | 20V                              |
| Input voltage, NDXD24, NDXS24 types                                          |                                | 40V                              |
| Input voltage, NDXD48, NDXS48 types                                          |                                | 80V                              |

| ISOLATION CHARACTERISTICS |                           |      |      |      |       |
|---------------------------|---------------------------|------|------|------|-------|
| Parameter                 | Conditions                | Min. | Typ. | Max. | Units |
| Isolation test voltage    | Flash tested for 1 second | 1000 |      |      | VDC   |
| Resistance                | Viso = 1kVDC              | 1    |      |      | GΩ    |

1. See ripple & noise characterisation method

2. Please refer to minimum load application notes section on page 4.

### GENERAL CHARACTERISTICS

| Parameter           | Conditions                                                 |                                |                       | Min. | Typ. | Max. | Units |
|---------------------|------------------------------------------------------------|--------------------------------|-----------------------|------|------|------|-------|
| Switching frequency | 100% total load to 25% total load<br>(Dual Output Types)   | 5V & 12V input                 | 5V, 12V & 15V outputs | 100  |      | 900  | kHz   |
|                     |                                                            | 24V & 48V input                | 5V outputs            | 100  |      | 680  |       |
|                     | 12V & 15V outputs                                          |                                |                       |      | 620  |      |       |
|                     | 100% total load to 25% total load<br>(Single Output Types) | 5V, 12V & 24V input            | 12V & 15V output      | 90   |      | 850  |       |
|                     |                                                            | 48V input                      | 12V & 15V output      | 90   |      | 600  |       |
|                     | Control pin input <sup>1</sup>                             | Module ON (or pin unconnected) | Single outputs        |      | -0.6 |      |       |
| 0                   |                                                            |                                |                       |      |      | 0.1  | mA    |
| Dual outputs        |                                                            |                                | -0.6                  |      | 0.8  | V    |       |
|                     |                                                            |                                | -0.1                  |      | 0.2  | mA   |       |
| Module OFF          |                                                            | Single outputs                 |                       | 3.0  |      | 7.0  | V     |
|                     |                                                            |                                |                       | 0.7  |      | 3.0  | mA    |
|                     |                                                            | Dual outputs                   |                       | 3.0  |      | 7.0  | V     |
|                     |                                                            |                                |                       | 0.3  |      | 3.0  | mA    |

### TEMPERATURE CHARACTERISTICS

| Parameter                           | Conditions                                 | Min.                               | Typ. | Max. | Units |
|-------------------------------------|--------------------------------------------|------------------------------------|------|------|-------|
| Operation                           |                                            | -40                                |      | 85   | °C    |
| Storage                             |                                            | -50                                |      | 130  |       |
| Case temperature rise above ambient | 100% Load, Nom V <sub>IN</sub> , Still Air | 1212, 1215, 2412, 2415, 4812, 4815 | 35   |      |       |
|                                     |                                            | 0512, 2405, 4805                   | 43   |      |       |
|                                     |                                            | 0505, 0515, 1205                   | 48   |      |       |

### MEAN TIME TO FAILURE (MTTF)<sup>2</sup>

| Part Number | 0°C  | 25°C | Units |
|-------------|------|------|-------|
| NDXD2412C   | 2590 | 1528 | kHrs  |
| NDXD2415C   | 2492 | 1462 |       |
| NDXD4812C   | 2587 | 1558 |       |
| NDXD4815C   | 2351 | 1379 |       |

1. See application notes on page 4.

2. Calculated using MIL-HDBK-217F with nominal input voltage at full load.

All specifications typical at T<sub>A</sub>=25°C, nominal input voltage and rated output current unless otherwise specified.

### RoHS COMPLIANCE INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. The pin termination finish on this product series is a Gold flash (0.05-0.10 micron) over Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems. For further information, please visit [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)


## APPLICATION NOTES

### External Capacitance

Although these converters will work without external capacitors, they are necessary in order to guarantee the full parametric performance over the full line and load range. All parts have been tested and characterised using the following values and test circuit.

| Input Voltage | C <sub>IN</sub> | Value                          |                      |
|---------------|-----------------|--------------------------------|----------------------|
|               |                 | C <sub>OUT1</sub>              | C <sub>OUT2</sub>    |
| 5V & 12V      | 100µF, 100V     | 0.1µF, 25V multi-layer ceramic | 100µF, 25V (low ESR) |
| 24V & 48V     | 10µF, 200V      |                                |                      |

### Recommended Input & Output Capacitors

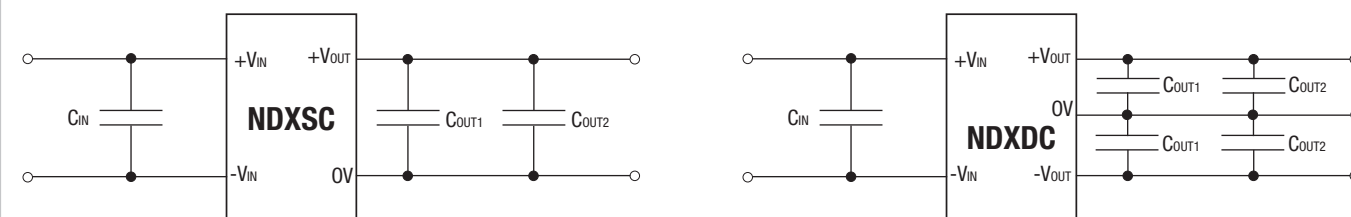

### Control Pin

**Dual Output:** This provides an OFF function, which puts the converter into a low power mode. When the pin is high the converter is OFF. Standard TTL levels can be used but the maximum high level must not exceed 7.0V. The pin can be left open for normal operation or at voltage below 0.8V with respect to the -V<sub>IN</sub> pin.

**Single Output:** As per dual output, however a series diode must be fitted when the control pin is used on the single output variants. Recommended diode 1N4148 or similar (direction of fitting is cathode to control pin).

### Cross Regulation

Load regulation is at its best when the positive and negative loads are balanced. When the loads are asymmetric, the negative output is not as tightly regulated as the positive output. To meet ripple specification a total minimum load of 25% full load is required, however, the NDX can be used with much lighter loading at the expense of increased ripple. A small load of 150mW is required on the negative output to ensure the maximum negative output voltage is not exceeded. NDX cross regulation is defined on page 2.

### Minimum load

The minimum load for correct operation is 25% of the full rated load across the specified input voltage range. Lower loads may cause a significant increase in output ripple and may cause the output voltage to exceed its specification transiently during power-down when the input voltage also falls below its rated minimum. A minimum loading of 30% load is required on NDXD4805 to prevent output voltage rise above specification during power-down.

## TECHNICAL NOTES

### ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NDX series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the NDX series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

### REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NDX series has an EI ferrite core, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

## CHARACTERISATION TEST METHODS


### Ripple & Noise Characterisation Method

Ripple and noise measurements are performed with the following test configuration with the inclusion of recommended input and output capacitors.

|       |                                                                                                                                                                        |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| C1    | 1 $\mu$ F X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC/DC converter                                        |
| C2    | 10 $\mu$ F tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC/DC converter with an ESR of less than 100m $\Omega$ at 100 kHz |
| C3    | 100nF multilayer ceramic capacitor, general purpose                                                                                                                    |
| R1    | 450 $\Omega$ resistor, carbon film, +/-1% tolerance                                                                                                                    |
| R2    | 50 $\Omega$ BNC termination                                                                                                                                            |
| T1    | 3T of the coax cable through a ferrite toroid                                                                                                                          |
| RLOAD | Resistive load to the maximum power rating of the DC/DC converter. Connections should be made via twisted wires                                                        |

Measured values are multiplied by 10 to obtain the specified values.


### Differential Mode Noise Test Schematic

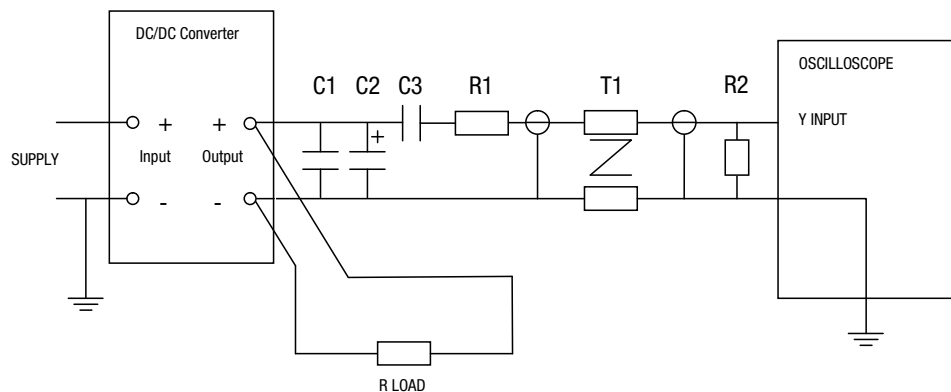

### Input Reflected Ripple Current Test Method


Input reflected ripple current measurements are performed with the following test configuration with the inclusion of recommended input and output capacitors.

|    |                                                                            |
|----|----------------------------------------------------------------------------|
| C1 | 220 $\mu$ F with ESR of <0.1 $\Omega$ at 100kHz, rated at supply voltage   |
| L1 | 12 $\mu$ H rated at 150% minimum of the DC current taken by the converter. |
| C2 | The recommended input capacitor for the DC/DC converter.                   |

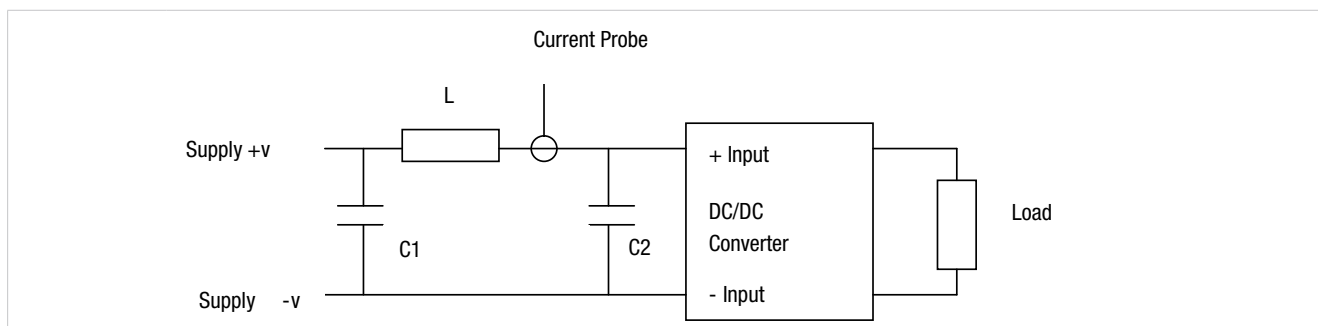

## PACKAGE SPECIFICATIONS

### MECHANICAL DIMENSIONS

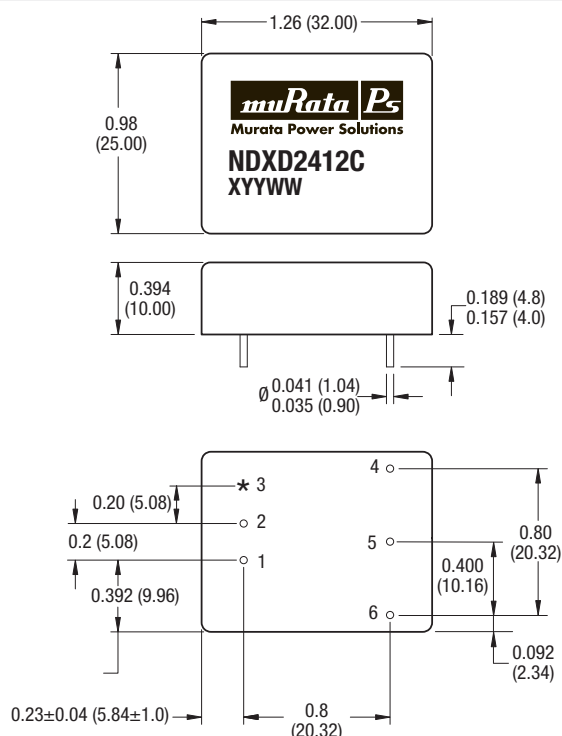

\* Optional pin

All dimensions in inches  $\pm 0.010$  (mm 0.25mm) except where stated otherwise.

All pins on a 0.100 (2.54) pitch and within 0.010 (0.25) of true position.

The copper case is connected to the output (-V<sub>OUT</sub>) pin. Care is needed in the design of this circuit board on which the converter is mounted. Top side tracks must not contact the edge of the case on the underside of the unit.

Please note that from 2010 onwards you may receive either a blue or a black case finish.


Weight: 20g

### PIN CONNECTIONS

| Pin | Function          |                   |
|-----|-------------------|-------------------|
|     | Duals             | Singles           |
| 1   | -V <sub>IN</sub>  | -V <sub>IN</sub>  |
| 2   | +V <sub>IN</sub>  | +V <sub>IN</sub>  |
| 3*  | CTRL              | CTRL              |
| 4   | +V <sub>OUT</sub> | +V <sub>OUT</sub> |
| 5   | OV                | No pin            |
| 6   | -V <sub>OUT</sub> | OV                |

\* Optional pin


### RECOMMENDED FOOTPRINT DETAILS

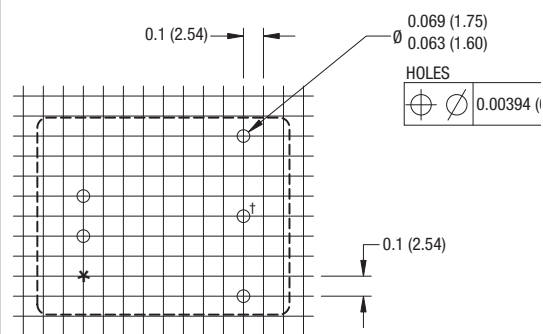

† Hole not required for single output variants.

All dimensions in inches  $\pm 0.010$  (mm 0.25mm).

### TUBE OUTLINE DIMENSIONS

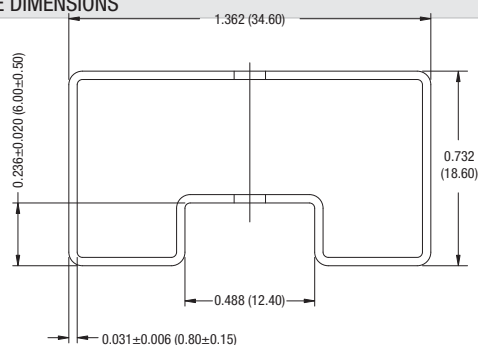

All dimensions in inches  $\pm 0.010$  (mm 0.25mm).

Quantity: 15