



STATUS INDICATOR 15° - 50° VIEWING ANGLE

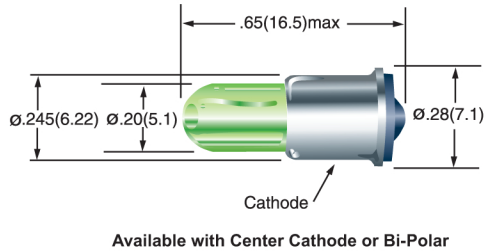


BACKLIGHT 75° VIEWING ANGLE

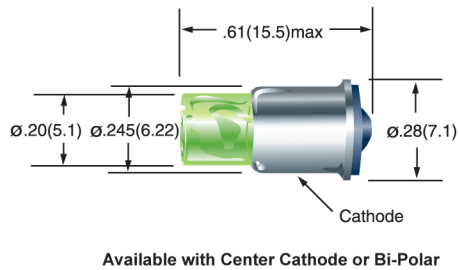


	LED Color	Voltage	Design Current
	Red	5VDC	15-22mA
	Amber	6VDC	15-21mA
	Green	12VDC	15-20mA
	Blue	15VDC	15-20mA
	Cool White	24VDC	15-17mA
	Warm White	28VDC	15-16.5mA
		48VDC	9mA
		60VDC	7mA
		120VDC	3.5mA



BASE OPTIONS



BP202




MB200



MF200



MG200



MS200



WB201

All dimensions are in inches (mm)

Tolerances: .xx"(.x) ±.025"(.63)/.xxx"(.xx)±.010"(.25)
Specifications are subject to change without notice.