

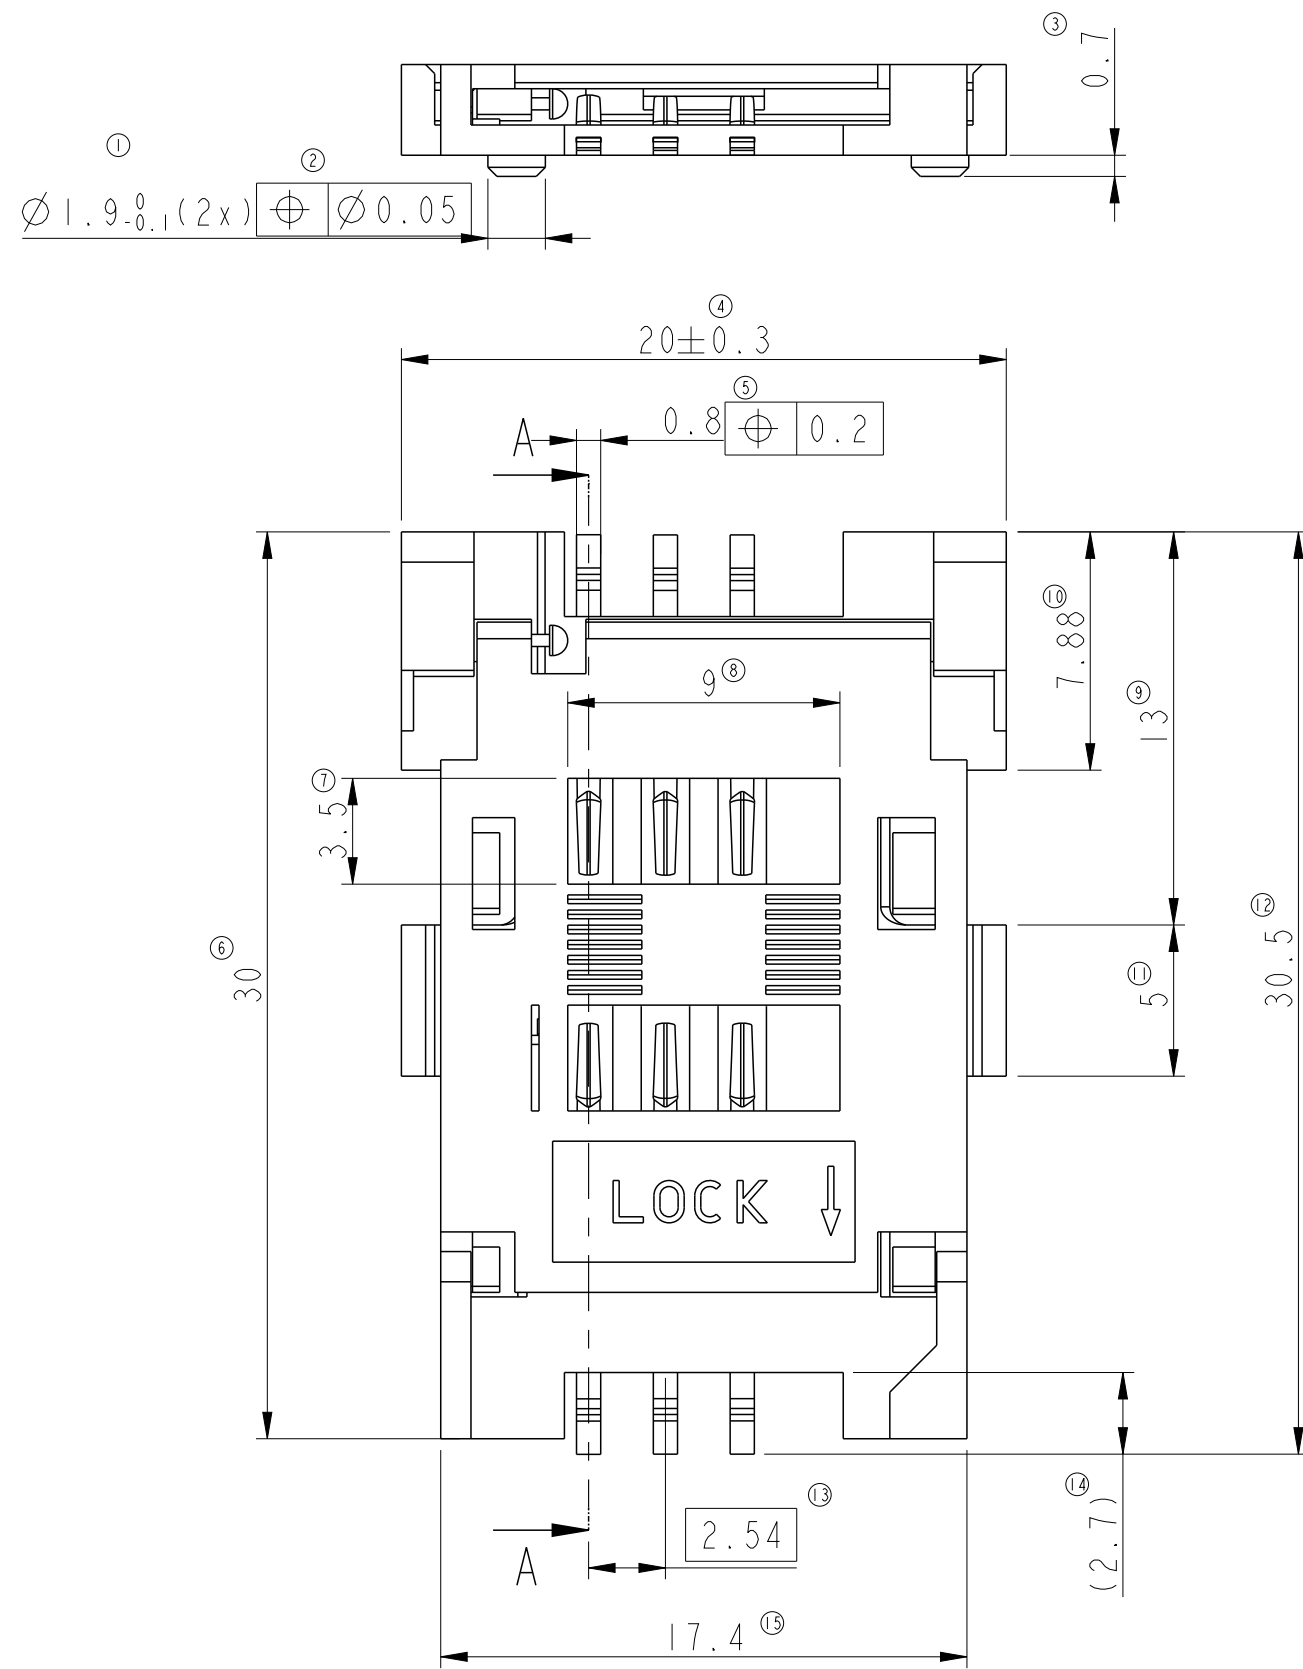


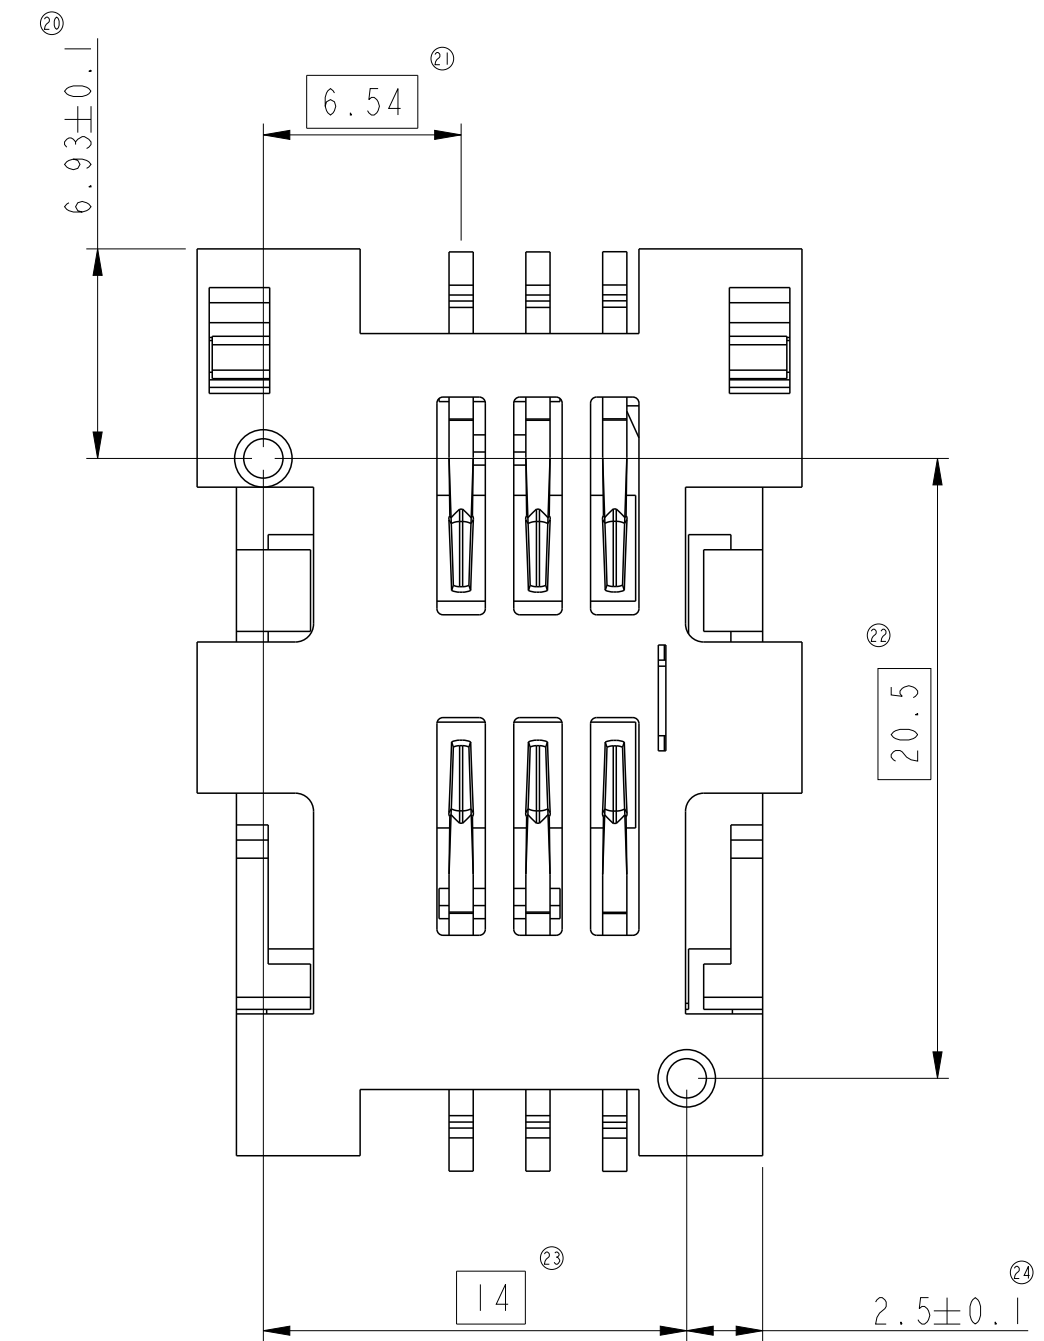

SECTION A-A

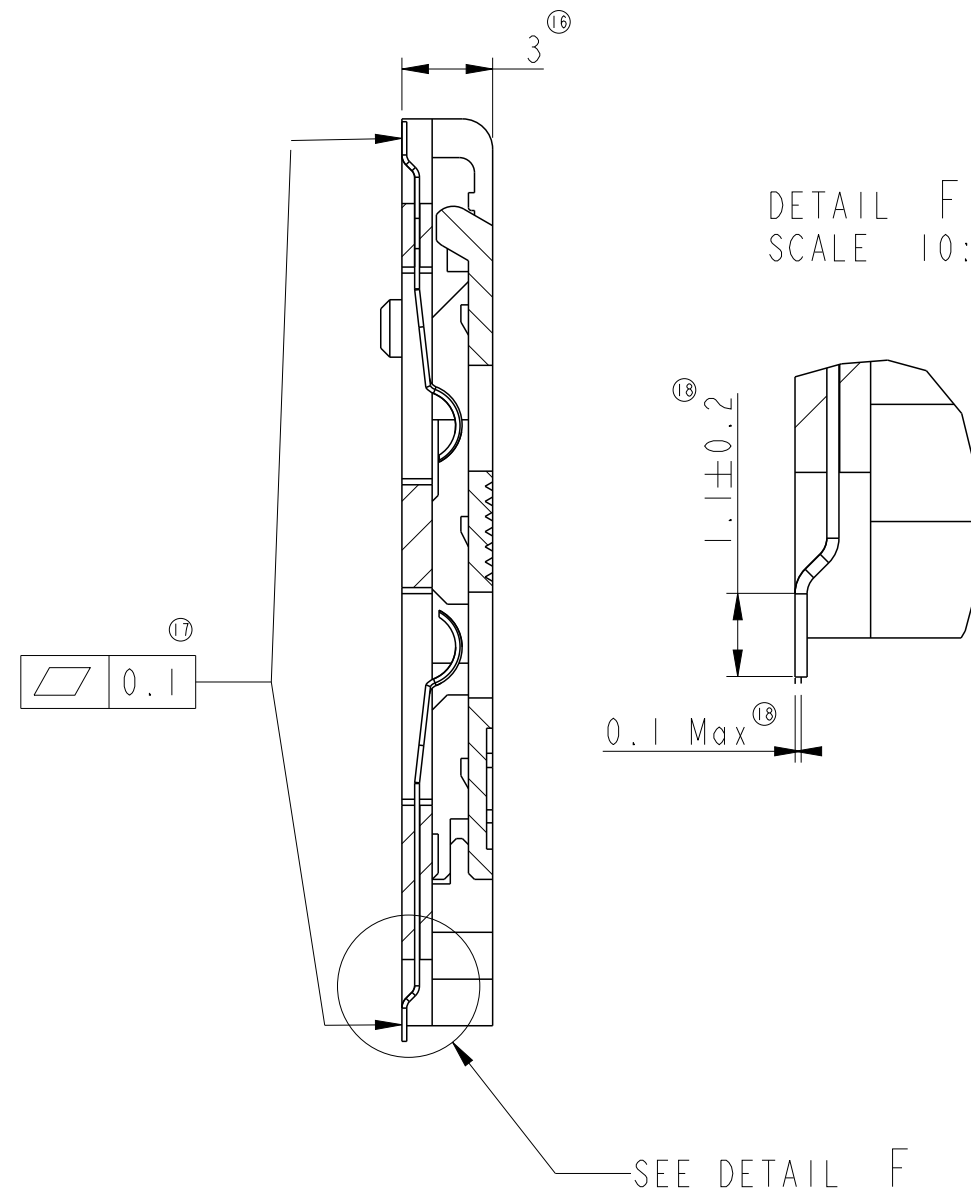

7X12S08XXX29LF


LEAD FREE

5: DURABILITY 10,000 OPERATIONS

1: 6 CONTACTS
2: 8 CONTACTS

1: TAPE N REEL PACKAGING
3: TRAY PACKAGING

General Tolerances	
0 to 10mm: ±0.1mm	
10 to 30mm: ±0.15mm	
30 to 60mm: ±0.2mm	
60 and more: ±0.3mm	

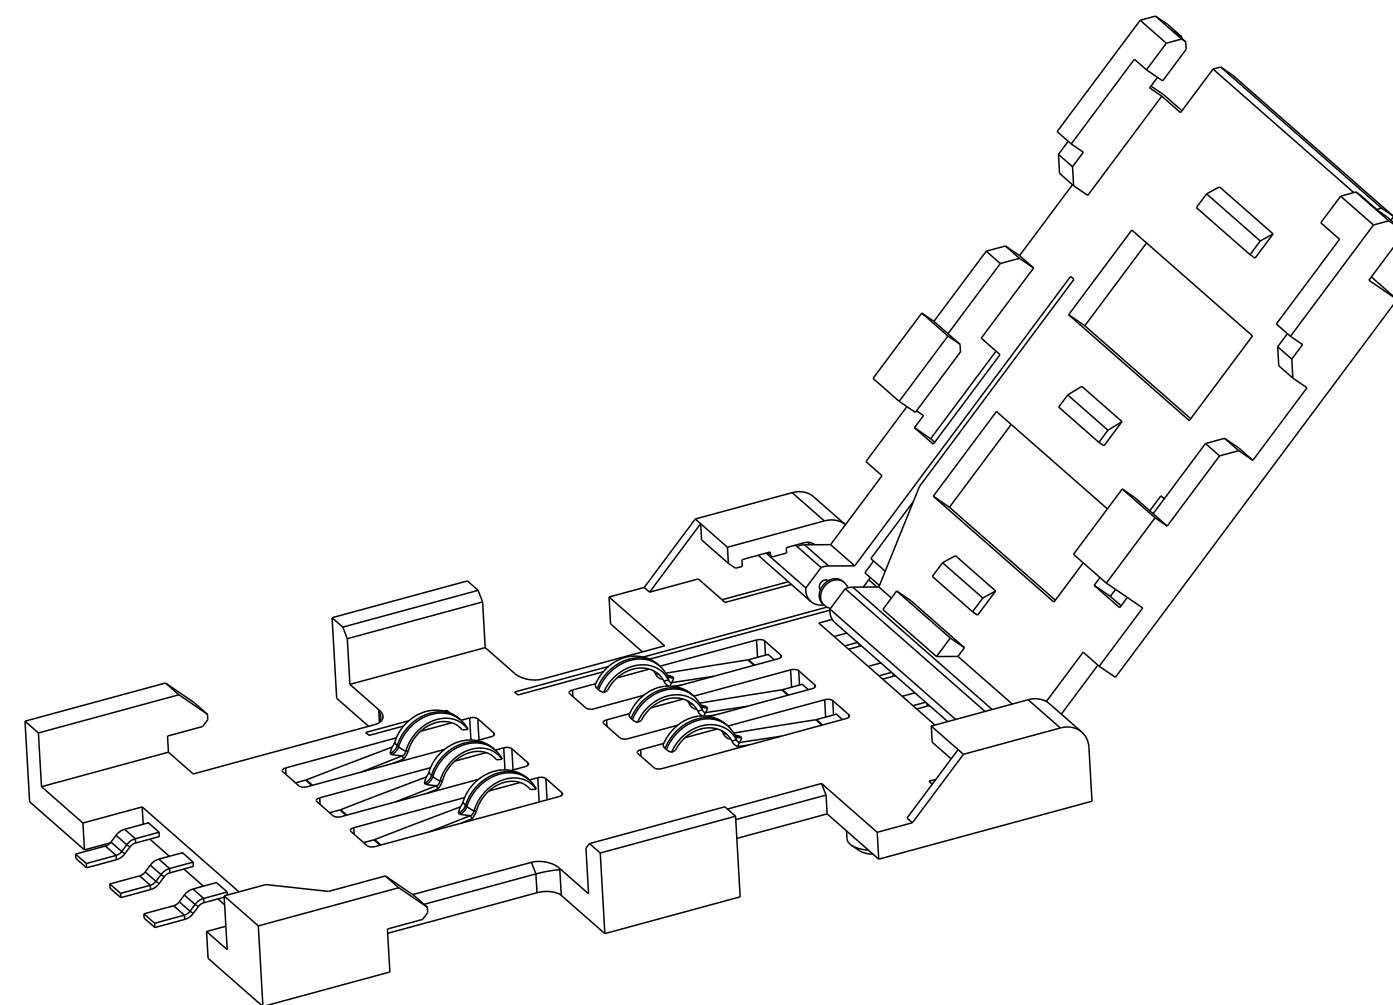

spec ref		--		dr		P-Matthew Nebu		2012/05/08		projection		mm		size		A2		scale		4:1							
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		P-Matthew Nebu		2013/08/08						ecn no		ELX-I-15417-2											
ISO 406				chr		-		-						rel level		Released											
ISO 1101				appr		K-Paul Biju		2013/08/20						product family		MOBILE I/O											
surface				linear		0.X		±				title		ASSY PERFORATED COVER		dwg no		VRW11880		rev		F					
																								0.XX		±	
																								0.XXX		±	
																								angular		0°	
ISO 1302										www.fci.com		cat. no.		see table		Product - Customer Drw		sheet 1 of 2									

PDS: Rev :F

STATUS:Released

Printed: Aug 20, 2013

