


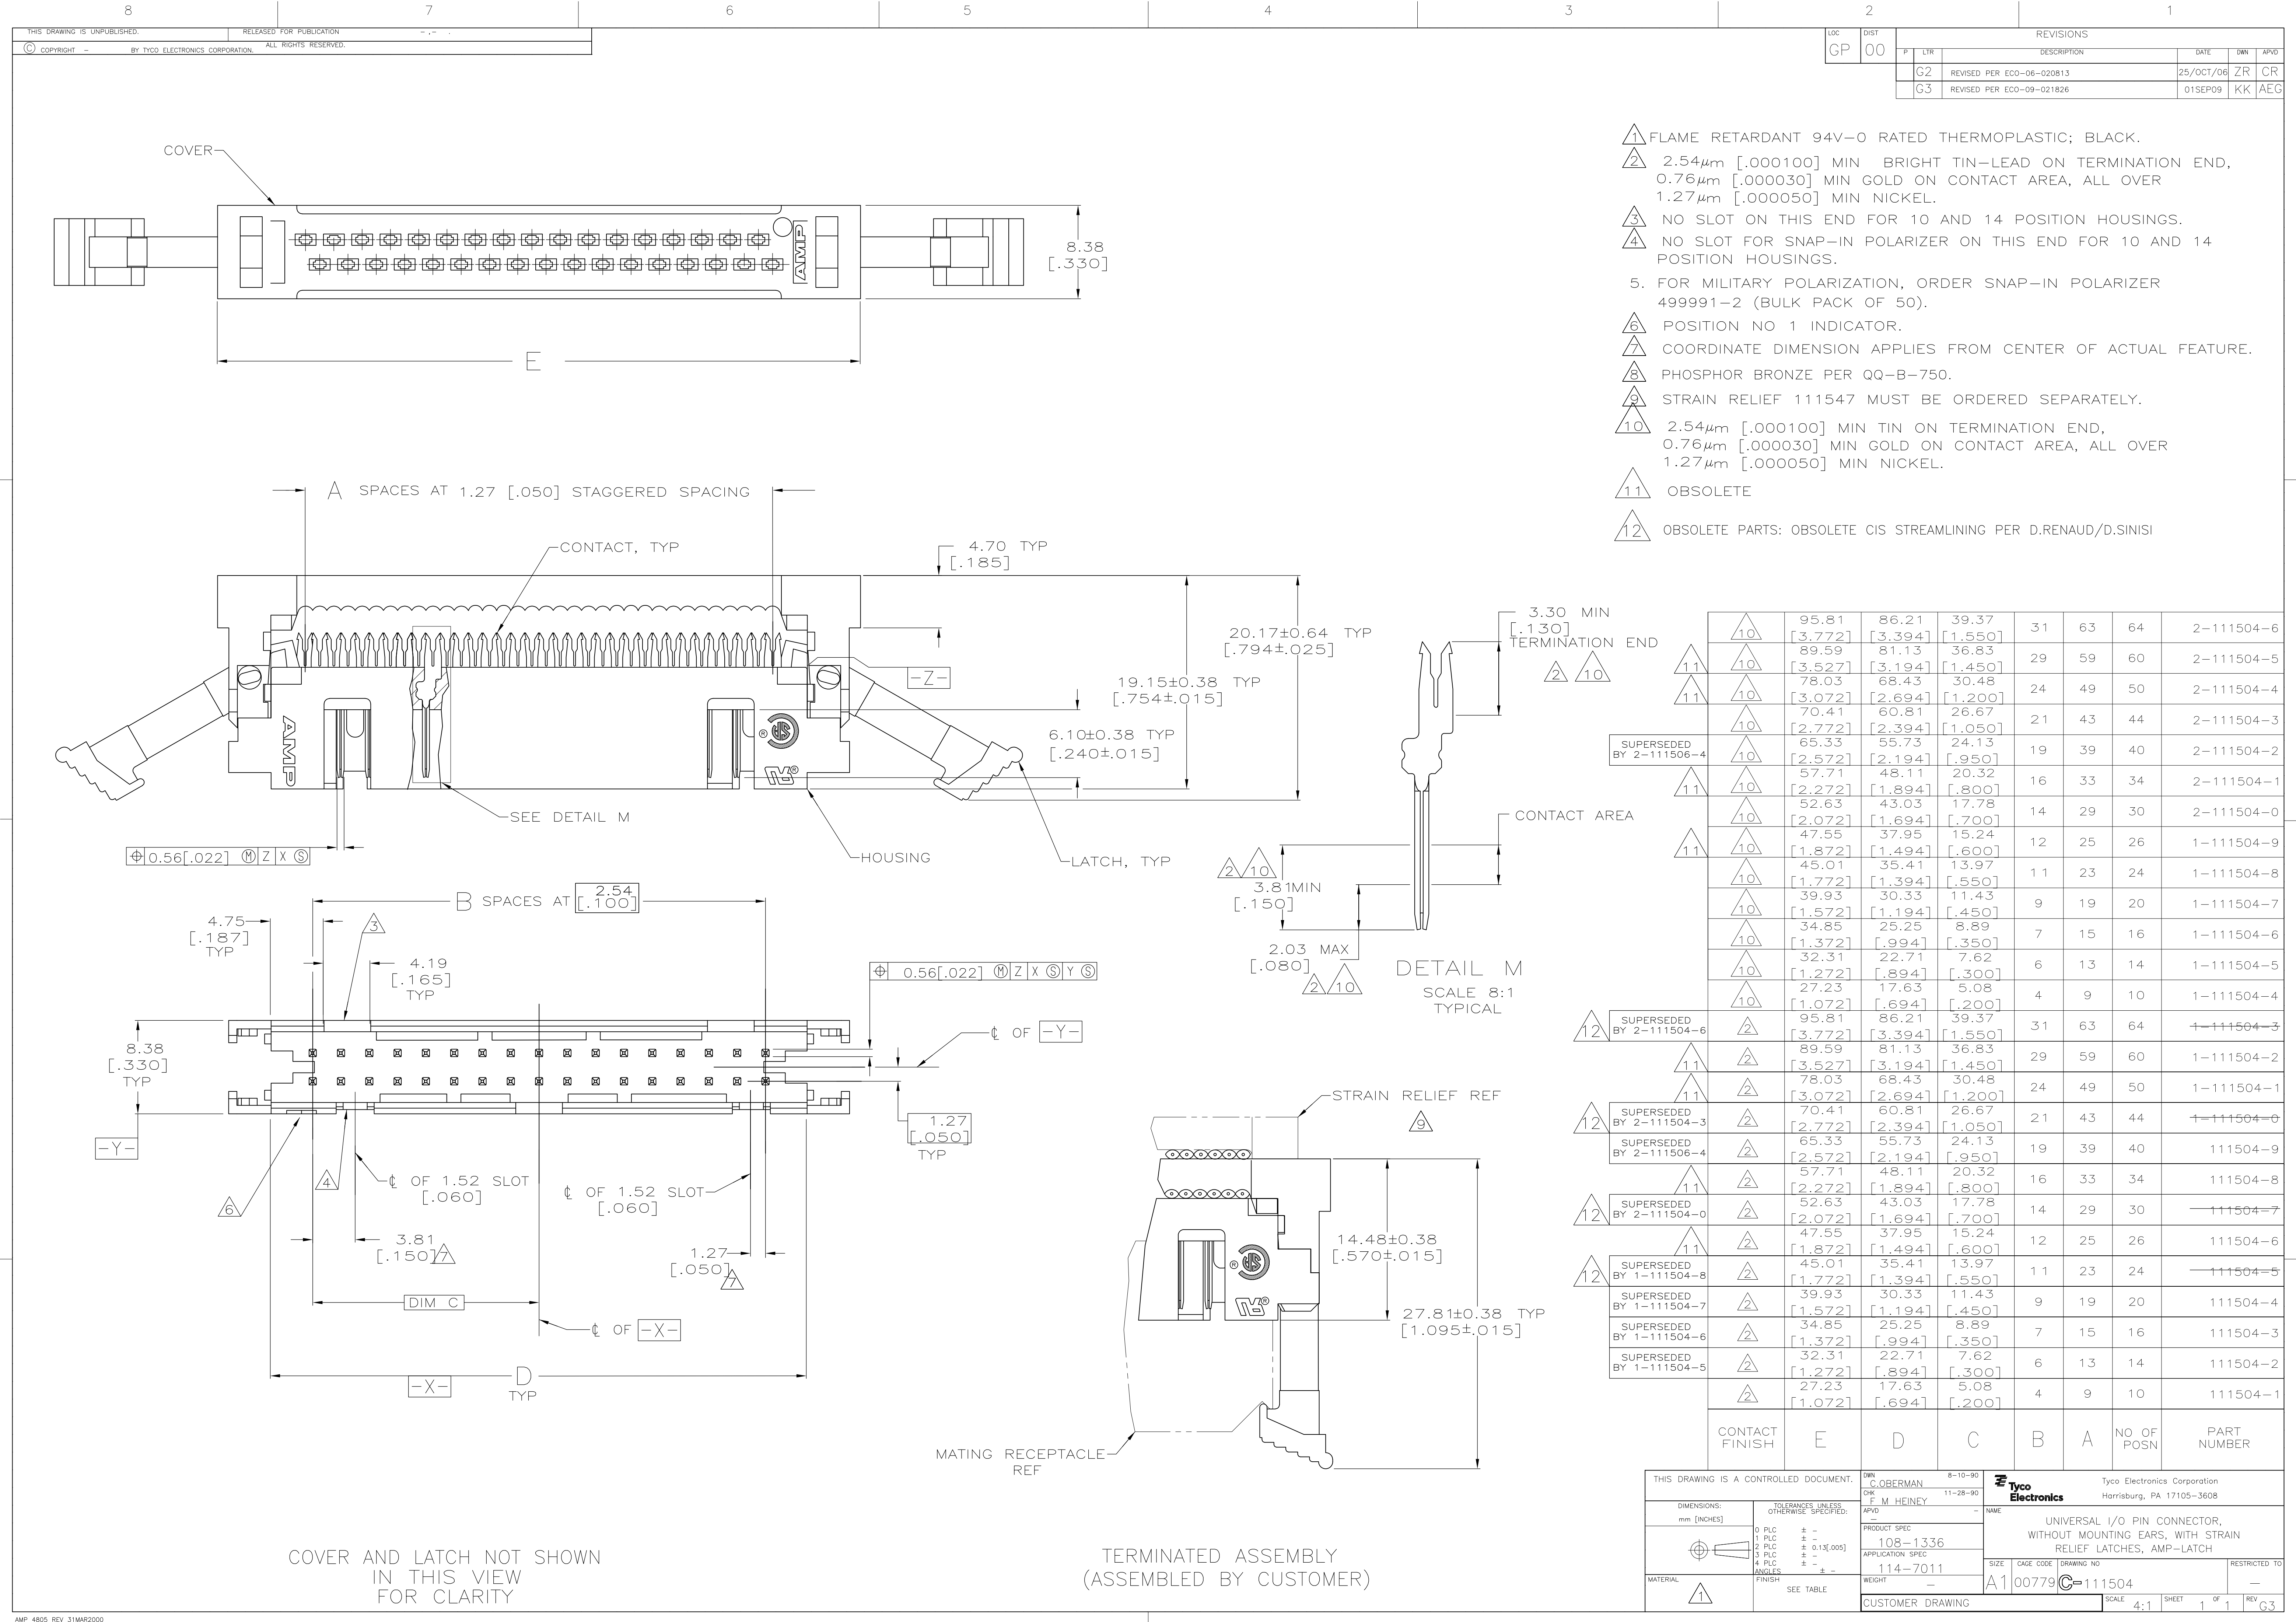

- 1 FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; BLACK.
- 2 2.54µm [.000100] MIN BRIGHT TIN-LEAD ON TERMINATION END, 0.76µm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27µm [.000050] MIN NICKEL.
- 3 NO SLOT ON THIS END FOR 10 AND 14 POSITION HOUSINGS.
- 4 NO SLOT FOR SNAP-IN POLARIZER ON THIS END FOR 10 AND 14 POSITION HOUSINGS.
- 5. FOR MILITARY POLARIZATION, ORDER SNAP-IN POLARIZER 499991-2 (BULK PACK OF 50).
- 6 POSITION NO 1 INDICATOR.
- 7 COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- 8 PHOSPHOR BRONZE PER QQ-B-750.
- 9 STRAIN RELIEF 111547 MUST BE ORDERED SEPARATELY.
- 10 2.54µm [.000100] MIN TIN ON TERMINATION END, 0.76µm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27µm [.000050] MIN NICKEL.
- 11 OBSOLETE
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

MAIN		END		REVISIONS															
GP		00		F		LTR		DESCRIPTION		DATE		DWN		APVD					
				G2		REVISED PER ECO-06-020813		25/OCT/06		ZR		CR							
				G3		REVISED PER ECO-09-021826		01SEP09		KK		AEG							
				10		95.81		86.21		39.37		31		63		64		2-111504-6	
				11		[3.772]		[3.394]		[1.550]		29		59		60		2-111504-5	
				11		[3.527]		[3.194]		[1.450]		24		49		50		2-111504-4	
				11		[3.072]		[2.694]		[1.200]		21		43		44		2-111504-3	
				11		[2.772]		[2.394]		[1.050]		19		39		40		2-111504-2	
				11		[2.572]		[2.194]		[.950]		16		33		34		2-111504-1	
				11		[2.272]		[1.894]		[.800]		14		29		30		2-111504-0	
				11		[2.072]		[1.694]		[.700]		12		25		26		1-111504-9	
				11		[1.872]		[1.494]		[.600]		11		23		24		1-111504-8	
				11		[1.772]		[1.394]		[.550]		9		19		20		1-111504-7	
				11		[1.572]		[1.194]		[.450]		7		15		16		1-111504-6	
				11		[1.372]		[.994]		[.350]		6		13		14		1-111504-5	
				11		[1.272]		[.894]		[.300]		4		9		10		1-111504-4	
				11		[1.072]		[.694]		[.200]		31		63		64		1-111504-3	
				11		[3.772]		[3.394]		[1.550]		29		59		60		1-111504-2	
				11		[3.527]		[3.194]		[1.450]		24		49		50		1-111504-1	
				11		[3.072]		[2.694]		[1.200]		21		43		44		1-111504-0	
				11		[2.772]		[2.394]		[1.050]		19		39		40		111504-9	
				11		[2.572]		[2.194]		[.950]		16		33		34		111504-8	
				11		[2.272]		[1.894]		[.800]		14		29		30		111504-7	
				11		[2.072]		[1.694]		[.700]		12		25		26		111504-6	
				11		[1.872]		[1.494]		[.600]		11		23		24		111504-5	
				11		[1.772]		[1.394]		[.550]		9		19		20		111504-4	
				11		[1.572]		[1.194]		[.450]		7		15		16		111504-3	
				11		[1.372]		[.994]		[.350]		6		13		14		111504-2	
				11		[1.272]		[.894]		[.300]		4		9		10		111504-1	
				11		[1.072]		[.694]		[.200]									
CONTACT FINISH		E		D		C		B		A		NO. OF POSN		PART NUMBER					

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN C. OBERMAN 8-10-90		Tyco Electronics Corporation	
				CHK F. M. HEINEY 11-28-90		Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		UNIVERSAL I/O PIN CONNECTOR, WITHOUT MOUNTING EARS, WITH STRAIN RELIEF LATCHES, AMP-LATCH	
		0 PLC ± -		PRODUCT SPEC		108-1336	
		1 PLC ± -		APPLICATION SPEC		114-7011	
		2 PLC ± 0.13[.005]		SIZE		A1 00779	
		3 PLC ± -		CAGE CODE		DRAWING NO 111504	
		4 PLC ± -		WEIGHT		RESTRICTED TO	
		ANGLES		MATERIAL		CUSTOMER DRAWING	
		SEE TABLE		SCALE		4:1	
				SHEET		1 OF 1	
				REV		G3	