

# SUPER MICRO CONNECTORS

SERIES



# 5046

## プラグ(H=3.0mm)


## Plug (H=3.0mm)

金具無 without metal


金具付 with metal

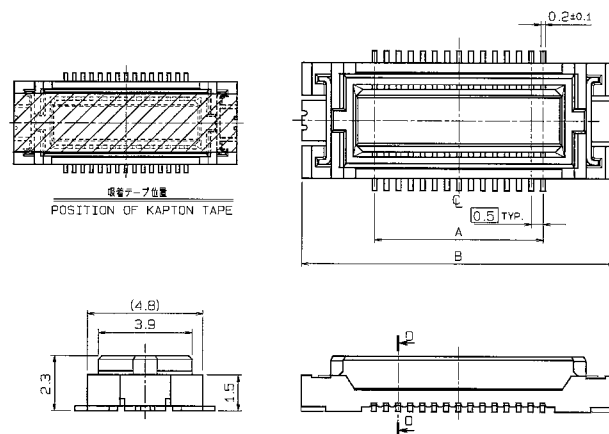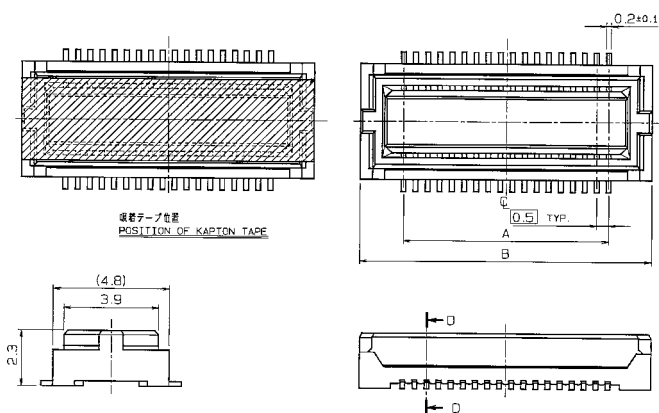



| 極数<br>NO. OF<br>POS. | A    | B    |
|----------------------|------|------|
| 20                   | 4.5  | 8.1  |
| 30                   | 7.0  | 10.6 |
| 40                   | 9.5  | 13.1 |
| 50                   | 12.0 | 15.6 |
| 60                   | 14.5 | 18.1 |
| 70                   | 17.0 | 20.6 |
| 80                   | 19.5 | 23.1 |
| 90                   | 22.0 | 25.6 |
| 100                  | 24.0 | 28.1 |
| 110                  | 27.0 | 30.6 |
| 120                  | 29.5 | 33.1 |

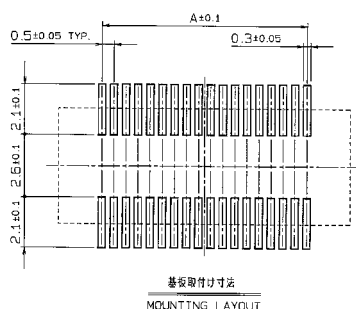

| 極数<br>NO. OF<br>POS. | A    | B    | C    |
|----------------------|------|------|------|
| 20                   | 4.5  | 10.5 | 7.7  |
| 30                   | 7.0  | 13.0 | 10.2 |
| 40                   | 9.5  | 15.5 | 12.7 |
| 50                   | 12.0 | 18.0 | 15.2 |
| 60                   | 14.5 | 20.5 | 17.7 |
| 70                   | 17.0 | 23.0 | 20.2 |
| 80                   | 19.5 | 25.5 | 22.7 |
| 90                   | 22.0 | 28.0 | 25.2 |
| 100                  | 24.5 | 30.5 | 27.7 |
| 110                  | 27.0 | 33.0 | 30.2 |
| 120                  | 29.5 | 35.5 | 32.7 |

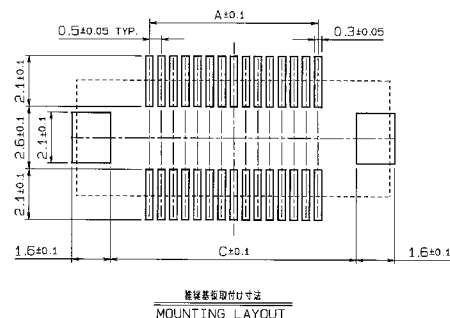

嵌合高さ  
STACKING HEIGHT  
H=3mm TYPE

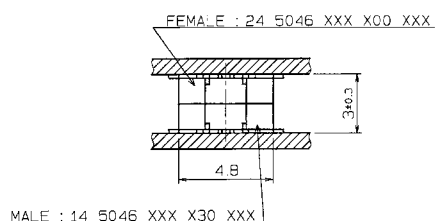

## 注文コード Ordering Code

| 嵌合高さ<br>STACKING HEIGHT | 型番<br>P/N |    |      |     |     |     |
|-------------------------|-----------|----|------|-----|-----|-----|
| 3.0mm                   | FEMALE    | 24 | 5046 | XXX | X00 | 829 |
|                         | MALE      | 14 | 5046 | XXX | X30 | 829 |

| 極数<br>NO. OF<br>POS. | 寸法<br>DIMENSION<br>B |
|----------------------|----------------------|
| 020                  | 10.5                 |
| 030                  | 13.0                 |
| 040                  | 15.5                 |
| 050                  | 18.0                 |
| 060                  | 20.5                 |
| 070                  | 23.0                 |
| 080                  | 25.5                 |
| 090                  | 28.0                 |
| 100                  | 30.5                 |
| 110                  | 33.0                 |
| 120                  | 35.5                 |

## VARIATION CODE

|   |                                                  |
|---|--------------------------------------------------|
| 0 | 金具無 WITHOUT METAL                                |
| 1 | 金具付 WITH METAL                                   |
| 5 | 金具無 吸着テープ付<br>WITHOUT METAL,<br>WITH VACUUM TAPE |
| 6 | 金具付 吸着テープ付<br>WITH METAL,<br>WITH VACUUM TAPE    |

# SUPER MICRO CONNECTORS


SERIES

# 5046


## プラグ(H=3.5mm)

## Plug (H=3.5mm)

**金具無** without metal

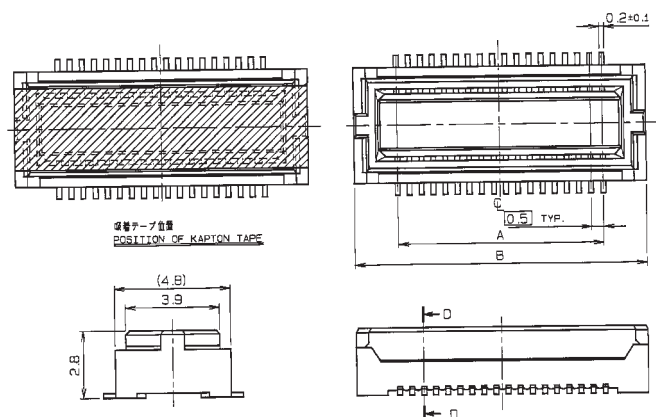


| 極数<br>NO. OF<br>POS. | A    | B    |
|----------------------|------|------|
| 20                   | 4.5  | 8.1  |
| 30                   | 7.0  | 10.6 |
| 40                   | 9.5  | 13.1 |
| 50                   | 12.0 | 15.6 |
| 60                   | 14.5 | 18.1 |
| 70                   | 17.0 | 20.6 |
| 80                   | 19.5 | 23.1 |
| 90                   | 22.0 | 25.6 |
| 100                  | 24.0 | 28.1 |
| 110                  | 27.0 | 30.6 |
| 120                  | 29.5 | 33.1 |

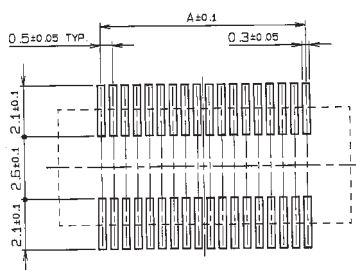


基板取付け寸法  
MOUNTING LAYOUT

**金具付** with metal

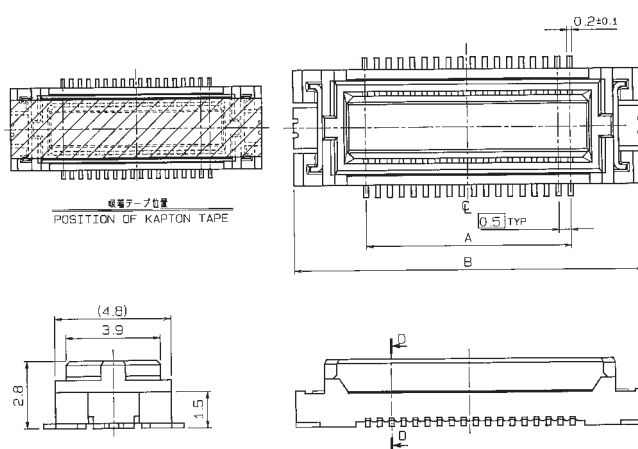



| 極数<br>NO. OF<br>POS. | A    | B    | C    |
|----------------------|------|------|------|
| 20                   | 4.5  | 10.5 | 7.7  |
| 30                   | 7.0  | 13.0 | 10.2 |
| 40                   | 9.5  | 15.5 | 12.7 |
| 50                   | 12.0 | 18.0 | 15.2 |
| 60                   | 14.5 | 20.5 | 17.7 |
| 70                   | 17.0 | 23.0 | 20.2 |
| 80                   | 19.5 | 25.5 | 22.7 |
| 90                   | 22.0 | 28.0 | 25.2 |
| 100                  | 24.5 | 30.5 | 27.7 |
| 110                  | 27.0 | 33.0 | 30.2 |
| 120                  | 29.5 | 35.5 | 32.7 |

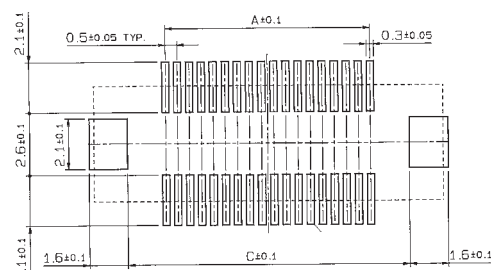

基板取付け寸法  
MOUNTING LAYOUT

## 注文コード Ordering Code

嵌合高さ  
STACKING HEIGHT  
H=3.5mm TYPE

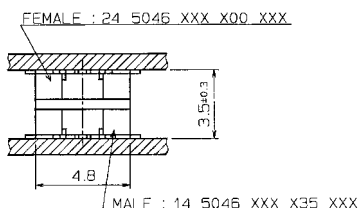

| 嵌合高さ<br>STACKING HEIGHT | 型番<br>P/N |    |      |     |     |     |
|-------------------------|-----------|----|------|-----|-----|-----|
| 3.5mm                   | FEMALE    | 24 | 5046 | XXX | X00 | 829 |
|                         | MALE      | 14 | 5046 | XXX | X35 | 829 |

| 極数<br>NO. OF<br>POS. | 寸法<br>DIMENSION<br>B |
|----------------------|----------------------|
| 020                  | 10.5                 |
| 030                  | 13.0                 |
| 040                  | 15.5                 |
| 050                  | 18.0                 |
| 060                  | 20.5                 |
| 070                  | 23.0                 |
| 080                  | 25.5                 |
| 090                  | 28.0                 |
| 100                  | 30.5                 |
| 110                  | 33.0                 |
| 120                  | 35.5                 |

## VARIATION CODE

|   |                                                  |
|---|--------------------------------------------------|
| 0 | 金具無 WITHOUT METAL                                |
| 1 | 金具付 WITH METAL                                   |
| 5 | 金具無 吸着テープ付<br>WITHOUT METAL,<br>WITH VACUUM TAPE |
| 6 | 金具付 吸着テープ付<br>WITH METAL,<br>WITH VACUUM TAPE    |

# SUPER MICRO CONNECTORS


SERIES

# 5046


## プラグ(H=4.0mm)

## Plug (H=4.0mm)

金具無 without metal

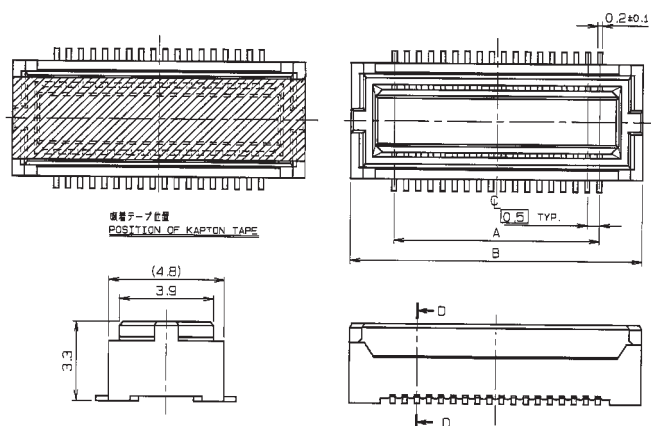


| 極数<br>NO. OF<br>POS. | A    | B    |
|----------------------|------|------|
| 20                   | 4.5  | 8.1  |
| 30                   | 7.0  | 10.6 |
| 40                   | 9.5  | 13.1 |
| 50                   | 12.0 | 15.6 |
| 60                   | 14.5 | 18.1 |
| 70                   | 17.0 | 20.6 |
| 80                   | 19.5 | 23.1 |
| 90                   | 22.0 | 25.6 |
| 100                  | 24.0 | 28.1 |
| 110                  | 27.0 | 30.6 |
| 120                  | 29.5 | 33.1 |

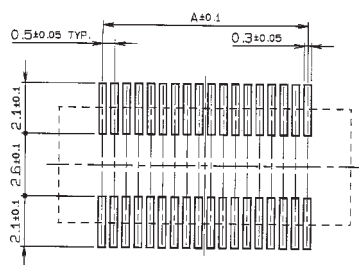


基板取り付け寸法  
MOUNTING LAYOUT

金具付 with metal

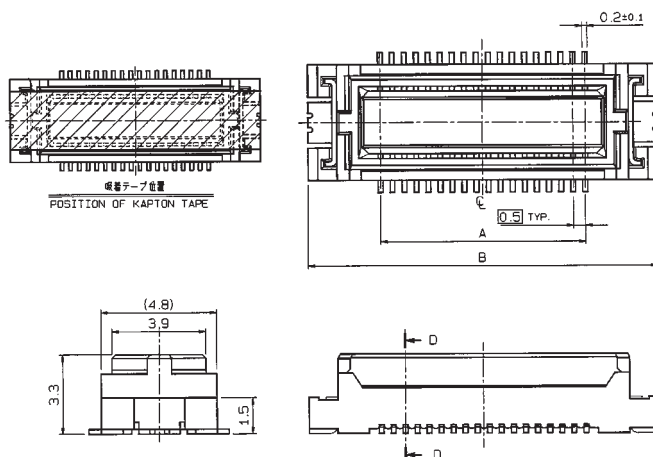



| 極数<br>NO. OF<br>POS. | A    | B    | C    |
|----------------------|------|------|------|
| 20                   | 4.5  | 10.5 | 7.7  |
| 30                   | 7.0  | 13.0 | 10.2 |
| 40                   | 9.5  | 15.5 | 12.7 |
| 50                   | 12.0 | 18.0 | 15.2 |
| 60                   | 14.5 | 20.5 | 17.7 |
| 70                   | 17.0 | 23.0 | 20.2 |
| 80                   | 19.5 | 25.5 | 22.7 |
| 90                   | 22.0 | 28.0 | 25.2 |
| 100                  | 24.5 | 30.5 | 27.7 |
| 110                  | 27.0 | 33.0 | 30.2 |
| 120                  | 29.5 | 35.5 | 32.7 |

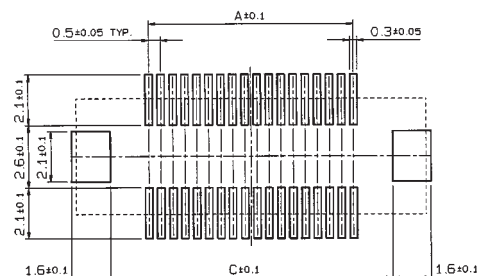

基板取り付け寸法  
RECOMMENDED LAYOUT

## 注文コード Ordering Code

嵌合高さ  
STACKING HEIGHT  
H=4mm TYPE

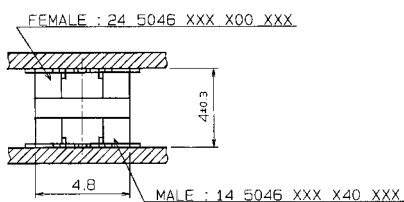

| 嵌合高さ<br>STACKING HEIGHT | 型番<br>P/N |    |      |     |     |     |
|-------------------------|-----------|----|------|-----|-----|-----|
| 4.0mm                   | FEMALE    | 24 | 5046 | XXX | X00 | 829 |
|                         | MALE      | 14 | 5046 | XXX | X40 | 829 |

| 極数<br>NO. OF<br>POS. | 寸法<br>DIMENSION<br>B |
|----------------------|----------------------|
| 020                  | 10.5                 |
| 030                  | 13.0                 |
| 040                  | 15.5                 |
| 050                  | 18.0                 |
| 060                  | 20.5                 |
| 070                  | 23.0                 |
| 080                  | 25.5                 |
| 090                  | 28.0                 |
| 100                  | 30.5                 |
| 110                  | 33.0                 |
| 120                  | 35.5                 |

## VARIATION CODE

|   |                                                  |
|---|--------------------------------------------------|
| 0 | 金具無 WITHOUT METAL                                |
| 1 | 金具付 WITH METAL                                   |
| 5 | 金具無 吸着テープ付<br>WITHOUT METAL,<br>WITH VACUUM TAPE |
| 6 | 金具付 吸着テープ付<br>WITH METAL,<br>WITH VACUUM TAPE    |

# SUPER MICRO CONNECTORS


SERIES

# 5046


## プラグ(H=4.5mm)

## Plug (H=4.5mm)

**金具無** without metal

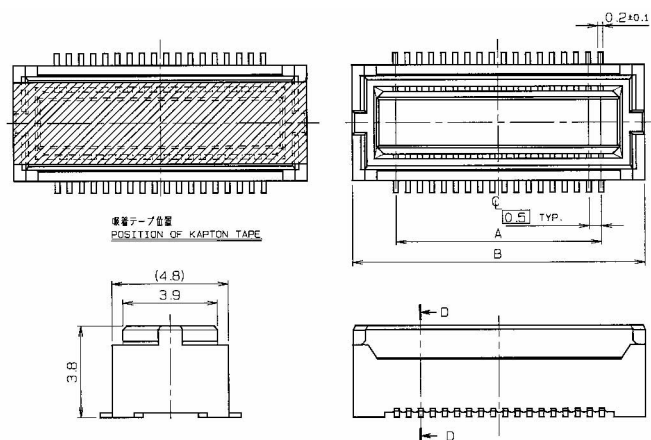


| 極数<br>NO. OF<br>POS. | A    | B    |
|----------------------|------|------|
| 20                   | 4.5  | 8.1  |
| 30                   | 7.0  | 10.5 |
| 40                   | 9.5  | 13.1 |
| 50                   | 12.0 | 15.6 |
| 60                   | 14.5 | 18.1 |
| 70                   | 17.0 | 20.6 |
| 80                   | 19.5 | 23.1 |
| 90                   | 22.0 | 25.6 |
| 100                  | 24.0 | 28.1 |
| 110                  | 27.0 | 30.6 |
| 120                  | 29.5 | 33.1 |

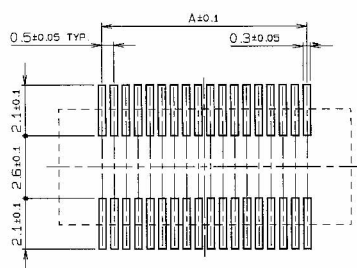


基板取付け寸法  
MOUNTING LAYOUT

**金具付** with metal

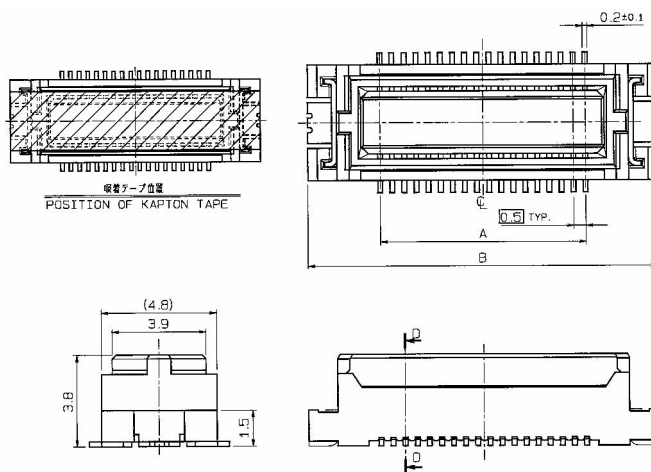


| 極数<br>NO. OF<br>POS. | A    | B    | C    |
|----------------------|------|------|------|
| 20                   | 4.5  | 10.5 | 7.7  |
| 30                   | 7.0  | 13.0 | 10.2 |
| 40                   | 9.5  | 15.5 | 12.7 |
| 50                   | 12.0 | 18.0 | 15.2 |
| 60                   | 14.5 | 20.5 | 17.7 |
| 70                   | 17.0 | 23.0 | 20.2 |
| 80                   | 19.5 | 25.5 | 22.7 |
| 90                   | 22.0 | 28.0 | 25.2 |
| 100                  | 24.5 | 30.5 | 27.7 |
| 110                  | 27.0 | 33.0 | 30.2 |
| 120                  | 29.5 | 35.5 | 32.7 |

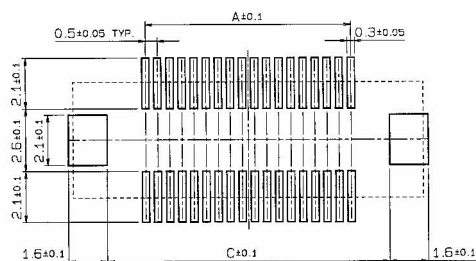


基板取付け寸法  
MOUNTING LAYOUT

## 注文コード Ordering Code

嵌合高さ  
STACKING HEIGHT  
H=4.5mm TYPE



FEMALE : 24 5046 XXX X00 XXX



MALE : 14 5046 XXX X45 XXX

| 嵌合高さ<br>STACKING HEIGHT | 型番<br>P/N |    |      |     |     |     |
|-------------------------|-----------|----|------|-----|-----|-----|
| 4.5mm                   | FEMALE    | 24 | 5046 | XXX | X00 | 829 |
|                         | MALE      | 14 | 5046 | XXX | X45 | 829 |

| 極数<br>NO. OF<br>POS. | 寸法<br>DIMENSION<br>B |
|----------------------|----------------------|
| 020                  | 10.5                 |
| 030                  | 13.0                 |
| 040                  | 15.5                 |
| 050                  | 18.0                 |
| 060                  | 20.5                 |
| 070                  | 23.0                 |
| 080                  | 25.5                 |
| 090                  | 28.0                 |
| 100                  | 30.5                 |
| 110                  | 33.0                 |
| 120                  | 35.5                 |

## VARIATION CODE



|   |                                                  |
|---|--------------------------------------------------|
| 0 | 金具無 WITHOUT METAL                                |
| 1 | 金具付 WITH METAL                                   |
| 5 | 金具無 吸着テープ付<br>WITHOUT METAL,<br>WITH VACUUM TAPE |
| 6 | 金具付 吸着テープ付<br>WITH METAL,<br>WITH VACUUM TAPE    |

# SUPER MICRO CONNECTORS

SERIES


# 5046

**プラグ エンボス(H=3.0, 3.5, 4.0, 4.5mm)**  
**Plug Tape and Reel Package (H=3.0, 3.5, 4.0, 4.5mm)**

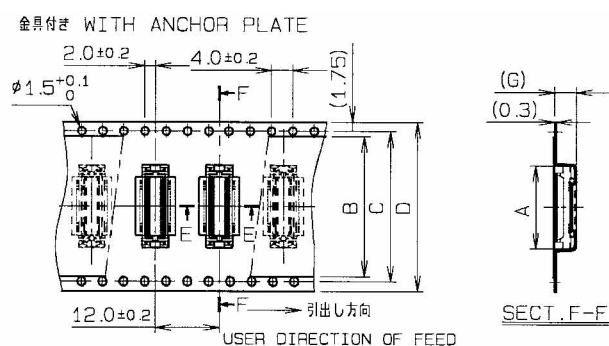

| HEIGHT | G   |
|--------|-----|
| H=3.0  | 4.1 |
| H=3.5  | 4.1 |
| H=4.0  | 4.6 |
| H=4.5  | 4.6 |

|           | 極数<br>NO. OF POS. | A    | B    | C    | D    |
|-----------|-------------------|------|------|------|------|
| 32mm TAPE | 20                | 8.1  | 26.5 | 28.4 | 32.0 |
|           | 30                | 10.6 |      |      |      |
|           | 40                | 13.1 |      |      |      |
|           | 50                | 15.6 |      |      |      |
|           | 60                | 18.1 |      |      |      |
| 44mm TAPE | 70                | 20.6 | 38.5 | 40.4 | 44.0 |
|           | 80                | 23.1 |      |      |      |
|           | 90                | 25.6 |      |      |      |
|           | 100               | 28.1 |      |      |      |
| 56mm TAPE | 110               | 30.6 | 50.5 | 52.4 | 56.0 |
|           | 120               | 33.1 |      |      |      |

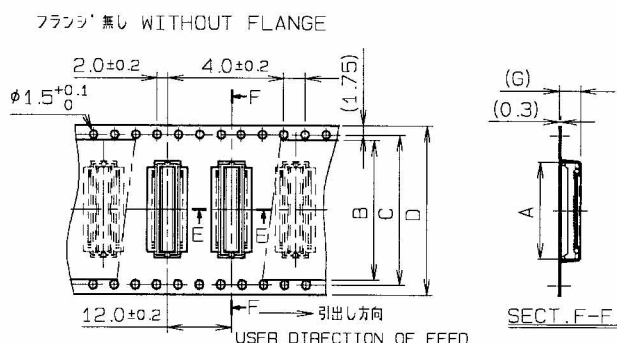

| HEIGHT | G   |
|--------|-----|
| H=3.0  | 4.1 |
| H=3.5  | 4.1 |
| H=4.0  | 4.6 |
| H=4.5  | 4.6 |

|           | 極数<br>NO. OF POS. | A    | B    | C    | D    |
|-----------|-------------------|------|------|------|------|
| 32mm TAPE | 20                | 8.1  | 26.5 | 28.4 | 32.0 |
|           | 30                | 10.6 |      |      |      |
|           | 40                | 13.1 |      |      |      |
|           | 50                | 15.6 |      |      |      |
|           | 60                | 18.1 |      |      |      |
| 44mm TAPE | 70                | 20.6 | 38.5 | 40.4 | 44.0 |
|           | 80                | 23.1 |      |      |      |
|           | 90                | 25.6 |      |      |      |
|           | 100               | 28.1 |      |      |      |
| 56mm TAPE | 110               | 30.6 | 50.5 | 52.4 | 56.0 |
|           | 120               | 33.1 |      |      |      |


# SUPER MICRO CONNECTORS

SERIES


# 5046

リセ  
Receptacle

## 金具無 without metal

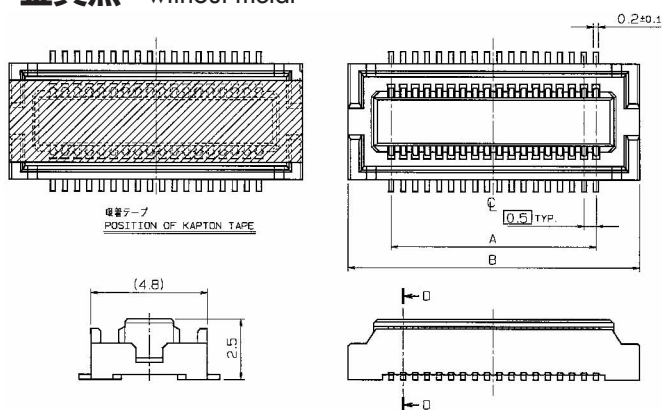


| 極数<br>NO. OF<br>POS. | A    | B    |
|----------------------|------|------|
| 20                   | 4.5  | 8.1  |
| 30                   | 7.0  | 10.6 |
| 40                   | 9.5  | 13.1 |
| 50                   | 12.0 | 15.6 |
| 60                   | 14.5 | 18.1 |
| 70                   | 17.0 | 20.6 |
| 80                   | 19.5 | 23.1 |
| 90                   | 22.0 | 25.6 |
| 100                  | 24.5 | 28.1 |
| 110                  | 27.0 | 30.6 |
| 120                  | 29.5 | 33.1 |




基板取付け寸法  
MOUNTING LAYOUT

## 金具付 with metal

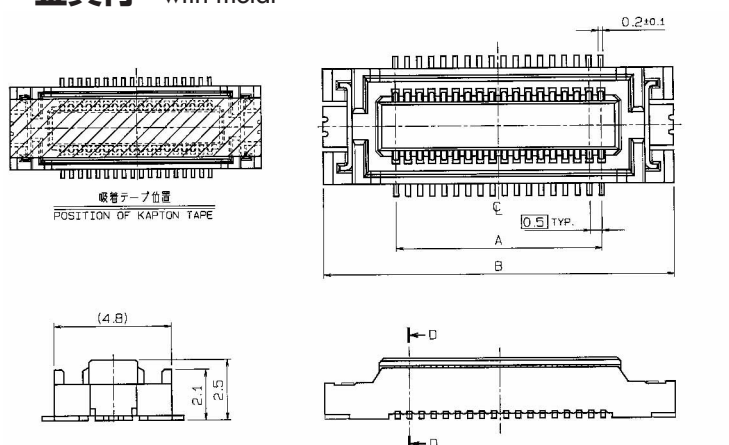

| 極数<br>NO. OF<br>POS. | A    | B    | C    |
|----------------------|------|------|------|
| 20                   | 4.5  | 10.5 | 7.7  |
| 30                   | 7.0  | 13.0 | 10.2 |
| 40                   | 9.5  | 15.5 | 12.7 |
| 50                   | 12.0 | 18.0 | 15.2 |
| 60                   | 14.5 | 20.5 | 17.7 |
| 70                   | 17.0 | 23.0 | 20.2 |
| 80                   | 19.5 | 25.5 | 22.7 |
| 90                   | 22.0 | 28.0 | 25.2 |
| 100                  | 24.5 | 30.5 | 27.7 |
| 110                  | 27.0 | 33.0 | 30.2 |
| 120                  | 29.5 | 35.5 | 32.7 |

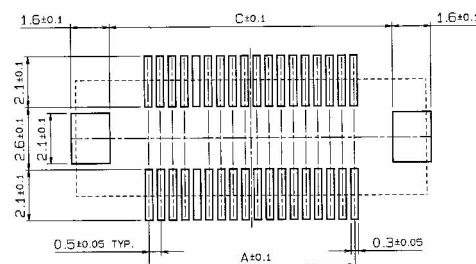

基板取付け寸法  
MOUNTING LAYOUT

## 注文コード Ordering Code

| 嵌合高さ<br>STACKING HEIGHT |        | 型番<br>P/N           |
|-------------------------|--------|---------------------|
| 4.5mm                   | FEMALE | 24 5046 XXX X00 829 |
|                         | MALE   | 14 5046 XXX X45 829 |
| 4.0mm                   | FEMALE | 24 5046 XXX X00 829 |
|                         | MALE   | 14 5046 XXX X40 829 |
| 3.5mm                   | FEMALE | 24 5046 XXX X00 829 |
|                         | MALE   | 14 5046 XXX X35 829 |
| 3.0mm                   | FEMALE | 24 5046 XXX X00 829 |
|                         | MALE   | 14 5046 XXX X30 829 |

| 極数<br>NO. OF<br>POS. | 寸法<br>DIMENSION<br>B |
|----------------------|----------------------|
| 020                  | 10.5                 |
| 030                  | 13.0                 |
| 040                  | 15.5                 |
| 050                  | 18.0                 |
| 060                  | 20.5                 |
| 070                  | 23.0                 |
| 080                  | 25.5                 |
| 090                  | 28.0                 |
| 100                  | 30.5                 |
| 110                  | 33.0                 |
| 120                  | 35.5                 |

## VARIATION CODE

|   |                                                  |
|---|--------------------------------------------------|
| 0 | 金具無 WITHOUT METAL                                |
| 1 | 金具付 WITH METAL                                   |
| 5 | 金具無 吸着テープ付<br>WITHOUT METAL.<br>WITH VACUUM TAPE |
| 6 | 金具付 吸着テープ付<br>WITH METAL.<br>WITH VACUUM TAPE    |



# SUPER MICRO CONNECTORS

SERIES



# 5046

## リセ エンボス

## Receptacle Tape and Reel Package

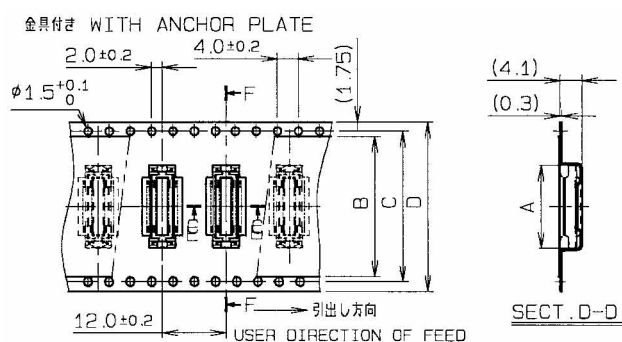

|           | 極数<br>NO. OF POS. | A     | B    | C    | D    |
|-----------|-------------------|-------|------|------|------|
| 32mm TAPE | 20                | 10.65 |      |      |      |
|           | 30                | 13.15 |      |      |      |
|           | 40                | 15.65 | 26.5 | 28.4 | 32.0 |
|           | 50                | 18.15 |      |      |      |
|           | 60                | 20.65 |      |      |      |
| 44mm TAPE | 70                | 23.15 |      |      |      |
|           | 80                | 25.65 | 38.5 | 40.4 | 44.0 |
|           | 90                | 28.15 |      |      |      |
|           | 100               | 30.65 |      |      |      |
| 56mm TAPE | 110               | 33.15 | 50.5 | 52.4 | 56.0 |
|           | 120               | 35.65 |      |      |      |

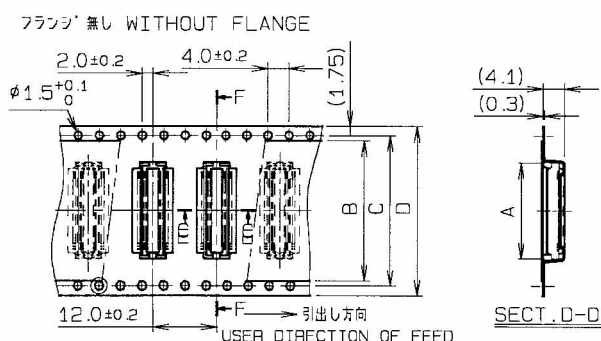

|           | 極数<br>NO. OF POS. | A     | B    | C    | D    |
|-----------|-------------------|-------|------|------|------|
| 32mm TAPE | 20                | 10.65 |      |      |      |
|           | 30                | 13.15 |      |      |      |
|           | 40                | 15.65 | 26.5 | 28.4 | 32.0 |
|           | 50                | 18.15 |      |      |      |
|           | 60                | 20.65 |      |      |      |
| 44mm TAPE | 70                | 23.15 |      |      |      |
|           | 80                | 25.65 | 38.5 | 40.4 | 44.0 |
|           | 90                | 28.15 |      |      |      |
|           | 100               | 30.65 |      |      |      |
| 56mm TAPE | 110               | 33.15 | 50.5 | 52.4 | 56.0 |
|           | 120               | 35.65 |      |      |      |