


FEATURES

- Current Limit Protection
- I/O Isolation, 3000 V_{RMS}
- Typical R_{ON} 20 Ω
- Load Voltage 350 V
- Load Current 120 mA
- High Surge Capability
- Linear, AC/DC Operation
- Clean Bounce Free Switching
- Low Power Consumption
- High Reliability Monolithic Receptor
- SMD Lead Available on Tape and Reel
- Equivalent to CPC1035N
- UL 52744 Recognition
- BABT/BSI Certified


APPLICATIONS

- General Telecom Switching
 - On/off Hook Control
 - Ring Delay
 - Dial Pulse
 - Ground Start
 - Ground Fault Protection
- Instrumentation
- Industrial Controls

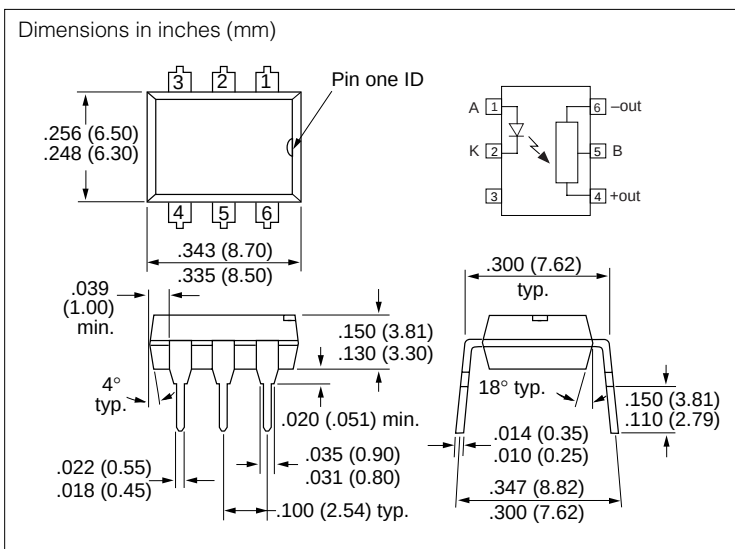

DESCRIPTION

Recommended Operating Conditions

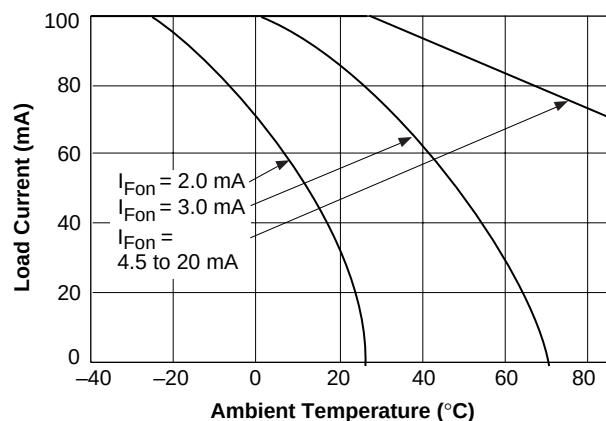

Absolute Maximum Ratings $T_A=25^{\circ}\text{C}$

Ambient Temperature Range (T_A)		-40 to +85°C
Storage Temperature Range (T_{stg})		-40 to +150°C
Pin Soldering Temperature ($t=10$ s max) (T_S)		260°C
Input/Output Isolation Voltage		
(V_{RMS} $t=1.0$ s, $I_{ISO}=10$ μA max) (V_{ISO})		3750 V_{RMS}
LED Continuous Forward Current (I_F)		50 mA
LED Reverse Voltage ($I_R \leq 10$ μA) (V_R)		8.0 V
DC or Peak AC Load Voltage ($I_L \leq 50$ μA) (V_L)		350 V
Continuous DC Load Current (I_L)		
Bidirectional Operation		100 mA
Unidirectional Operation		— mA
Peak Load Current ($t=100$ ms) (single shot) (I_P)		†
Output Power Dissipation (continuous) (P_{DISS})		550 mW

† Refer to Current Limit Performance Application Note 58 for a discussion on relay operation during transient currents.

Note:

Stresses in excess of the absolute Maximum Ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute Maximum Ratings for extended periods of time can adversely affect reliability.

Electrical Characteristics $T_A=25^{\circ}\text{C}$

Minimum and maximum values are testing requirements. Typical values are characteristics of the device and are the result of engineering evaluations. Typical values are for information only and are not part of the testing requirements.

Parameter	Sym.	Min.	Typ.	Max.	Units	Test Conditions
Input						
LED Forward Current, Switch Turn-on	I_{Fon}	—	1.2	2.5	mA	$I_L=100$ mA, $t=10$ ms
LED Forward Current, Switch Turn-off	I_{Foff}	0.01	1.1	—	mA	$V_L \pm 300$ V
LED Forward Voltage	V_F	1.10*	1.19*	1.45*	V	$I_F=10$ mA
Output						
ON-resistance ac/dc: Pin 4 ($\pm$) to 6 ($\pm$) dc: Pin 4, 6 (+) to 5 ($\pm$)	R_{ON}	25†	37†	50†	Ω	$I_F=5.0$ mA, $I_L=50$ mA
		3.0	5.0	6.25		$I_F=5.0$ mA, $I_L=100$ mA
OFF-resistance	R_{OFF}	0.5	5000	—	G Ω	$I_F=0$ mA, $V_L=\pm 100$ V
Current Limit ac/dc: Pin 4 ($\pm$) to 6 ($\pm$) dc: Pin 4, 6 (+) to 5 ($\pm$)	I_{LMT}	150	200	270	mA	$I_F=5.0$ mA, $t=5.0$ ms $V_L=\pm 13.0$ V
		—	—	—		$I_F=5.0$ mA, $t=5.0$ ms $V_L=\pm 4.0$ V
Off-state Leakage Current	—	—	0.2	200	nA	$I_F=0$ mA, $V_L=\pm 100$ V
		—	—	1.0	μA	$I_F=0$ mA, $V_L=\pm 350$ V
Output Capacitance Pin 4 to 6	—	—	40	—	pF	$I_F=0$ mA, $V_L=1.0$ V
		—	8.0	—		$I_F=0$ mA, $V_L=50$ V
Switch Offset	—	—	0.15	—	V	$I_F=5.0$ mA
Transfer						
Input/Output Capacitance	C_{ISO}	—	0.8	—	pF	$V_{ISO}=1.0$ V
Turn-on Time	t_{on}	—	1.4	3.0	ms	$I_F=5.0$ mA, $I_L=50$ mA
Turn-off Time	t_{off}	—	0.5	3.0	ms	$I_F=5.0$ mA, $I_L=50$ mA

* $I_F=5.0$ mA

† $I_L=100$ mA, $t=10$ ms

Figure 1. LED Voltage vs. Temperature

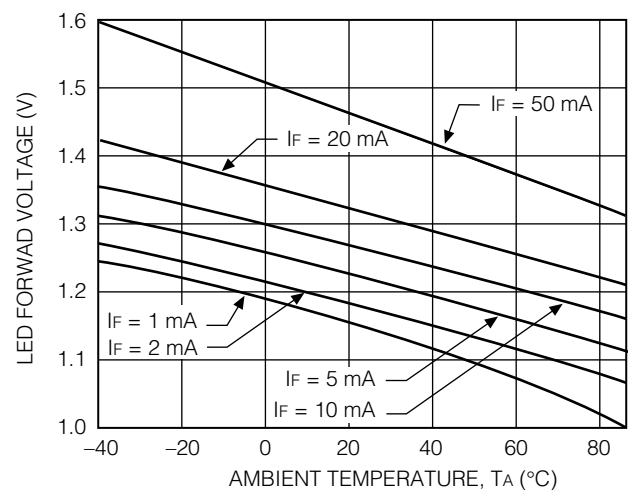


Figure 4. LED Current for Switch Turn-on/off vs. Temperature

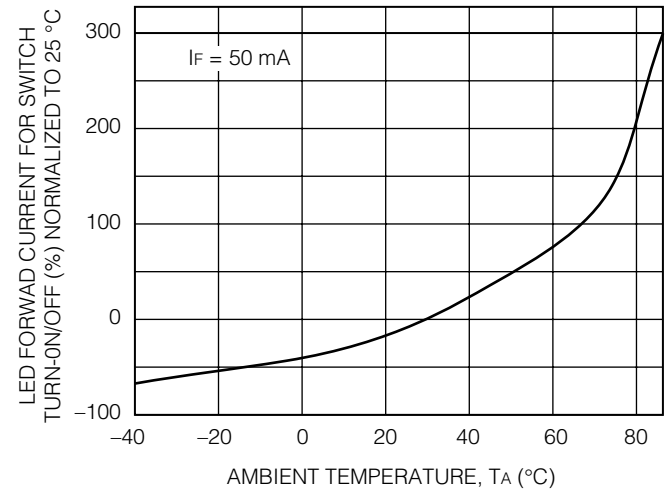


Figure 2. Current Limit vs. Temperature

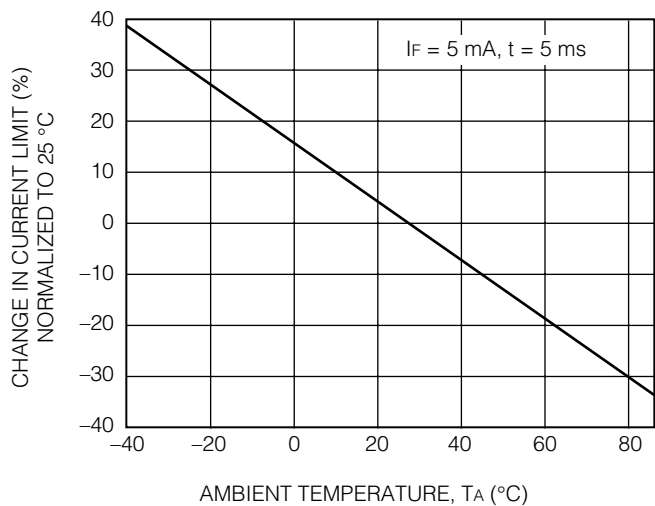


Figure 5. ON-resistance vs. Temperature

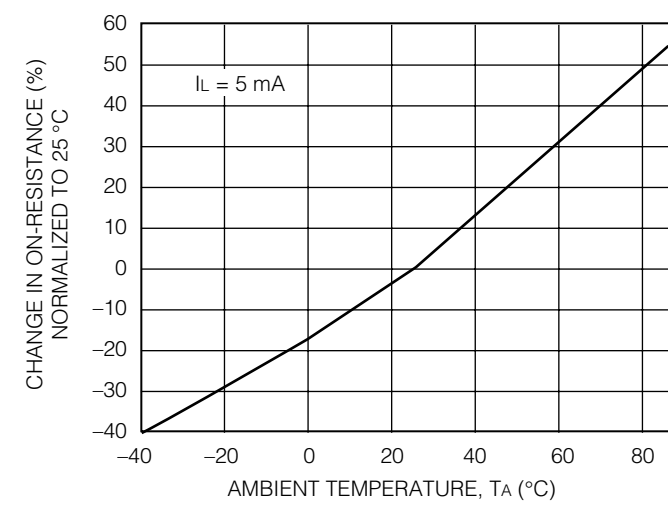


Figure 3. Turn-on Time vs. Temperature

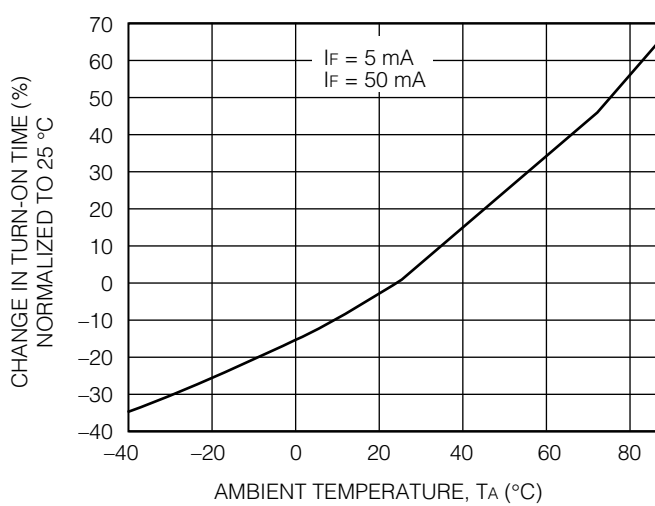


Figure 6. Turn-off Time vs. Temperature

