
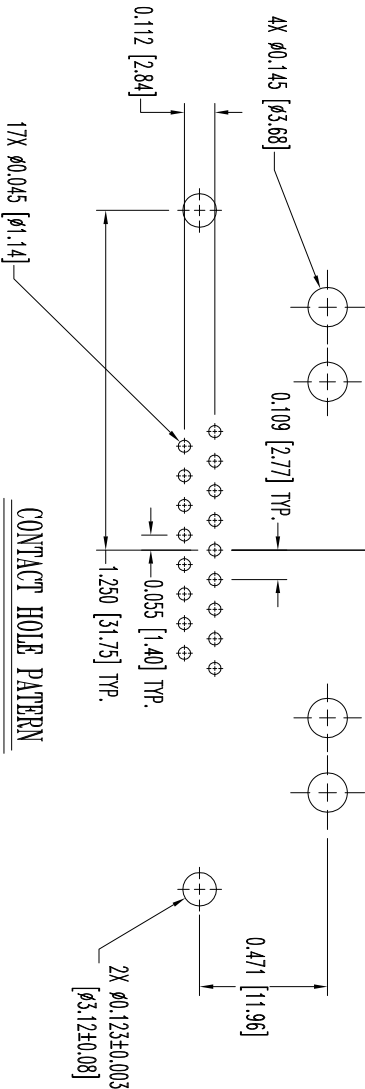
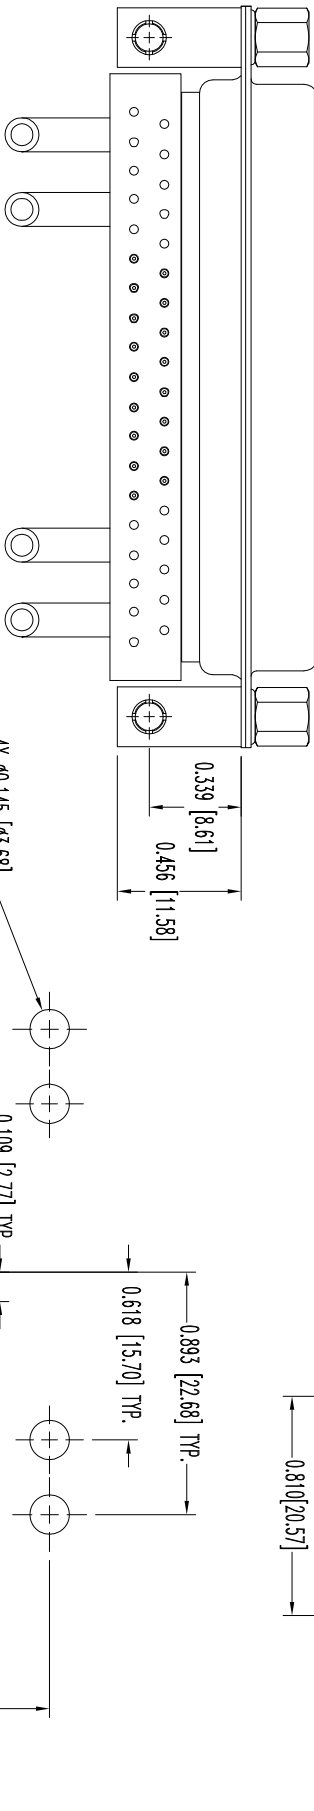


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO CONNECT POSITRONIC, INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION. CONNECT POSITRONIC, INC. ASSUMES NO LIABILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK10742

DATE	REV	REVISION/RECORD	APP	DR	CK
7-30-09	NC	ECO 31054	RCW	BS	COLB
3-19-10	A	ECO 32267	COLB	BE	COLB

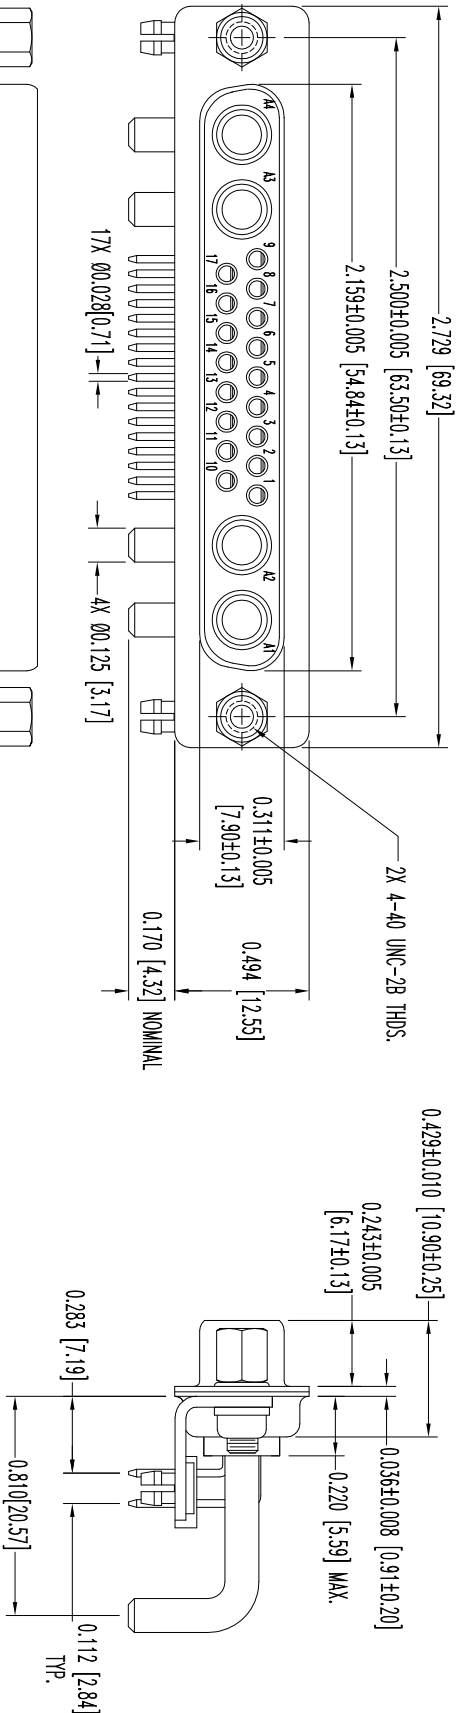

CONTACT HOLE PATTERN

- NOTES:
1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLUE COLOR.
SIGNAL CONTACTS: COPPER ALLOY WITH BERYLLIUM COPPER CLIP, 0.000050 [1.25μ] GOLD OVER NICKEL PLATE.
POWER CONTACTS: COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
SHELLS: STEEL, TIN PLATE.
MOUNTING BRACKETS: BRASS, TIN PLATE.
PUSH-ON FASTENERS: BERYLLIUM COPPER, TIN PLATE.
 2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY COMBO-D PRODUCT PUBLICATION.
VISIT CONNECTPOSITRONIC.COM/PRODUCTS/1/STANDARDENSITYCOMBO-D-OR-CONNECTPOSITRONIC.COM.
 3. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

FSCM 28198

DECIMAL TOL.	SCALE	DRAWN BY	APPROVED BY
± 0.015 [0.38]	N.T.S.	B SHELLBUDY	R WILLIAMS

DATE	DRAWING NUMBER	REV.
7-30-09	SK10742	A