


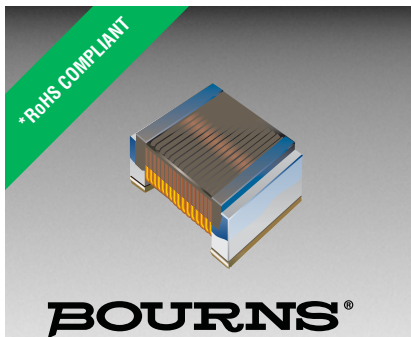

Features

- 1008 size
- Available in E12 series
- High Q - up to 80 typ.
- High operating temperature of 125 °C
- RoHS compliant*

Applications

- Mobile phones
- Cellular phones
- CTV, VCR, HIC, FDD


CW252016 Series - High Q Chip Inductors

Electrical Specifications

Bourns® Part No.	Inductance		Q	Test Freq. (MHz)		SRF (MHz)	RDC (Ohms)	I _{rms} (mA)
	nH	Tol. %	Min.	L	Q	Min.	Max.	Max.
CW252016-10NK	10	±10	50	100	500	4100	0.08	600
CW252016-12NK	12	±10	50	100	500	3300	0.09	600
CW252016-15NK	15	±10	40	100	350	2500	0.10	500
CW252016-18NK	18	±10	50	100	350	2500	0.11	600
CW252016-22NK	22	±10	55	100	350	2400	0.12	600
CW252016-27NK	27	±10	55	100	350	1600	0.13	600
CW252016-33NK	33	±10	60	100	350	1600	0.14	600
CW252016-39NK	39	±10	60	100	350	1500	0.15	600
CW252016-47NK	47	±10	60	100	350	1500	0.16	600
CW252016-56NJ	56	±5	60	100	350	1300	0.18	600
CW252016-68NJ	68	±5	60	100	350	1300	0.20	600
CW252016-82NJ	82	±5	60	100	350	1000	0.22	600
CW252016-R10J	100	±5	60	100	350	1000	0.56	500
CW252016-R12J	120	±5	50	25	100	950	0.63	500
CW252016-R15J	150	±5	45	25	100	850	0.70	500
CW252016-R18J	180	±5	45	25	100	750	0.77	500
CW252016-R22J	220	±5	45	25	100	700	0.84	500
CW252016-R27J	270	±5	45	25	100	600	0.91	500
CW252016-R33J	330	±5	45	25	100	570	1.05	500
CW252016-R39J	390	±5	45	25	100	500	1.12	400
CW252016-R47J	470	±5	45	25	100	450	1.19	470
CW252016-R56J	560	±5	45	25	100	415	1.33	400
CW252016-R68J	680	±5	45	25	100	375	1.55	400
CW252016-R82J	820	±5	45	25	100	350	2.30	360
CW252016-1R0J	1000	±5	25	25	50	290	1.75	330
CW252016-1R2J	1200	±5	25	7.9	7.9	250	2.00	280
CW252016-1R5J	1500	±5	25	7.9	7.9	200	2.30	280
CW252016-1R8J	1800	±5	25	7.9	7.9	160	2.60	270
CW252016-2R2J	2200	±5	25	7.9	7.9	160	2.80	250
CW252016-2R7J	2700	±5	22	7.9	7.9	70	3.20	195
CW252016-3R3J	3300	±5	22	7.9	7.9	55	3.40	185
CW252016-3R9J	3900	±5	20	7.9	7.9	48	3.60	180
CW252016-4R7J	4700	±5	18	7.9	7.9	43	4.00	175
CW252016-5R6J	5600	±5	18	7.9	7.9	40	4.90	180
CW252016-6R8J	6800	±5	18	7.9	7.9	25	6.00	150
CW252016-8R2J	8200	±5	18	7.9	7.9	25	8.00	100
CW252016-100J	10000	±5	18	2.5	7.9	40	4.20	200

NOTE: Shaded models are not recommended for new designs.

Packaging Specifications

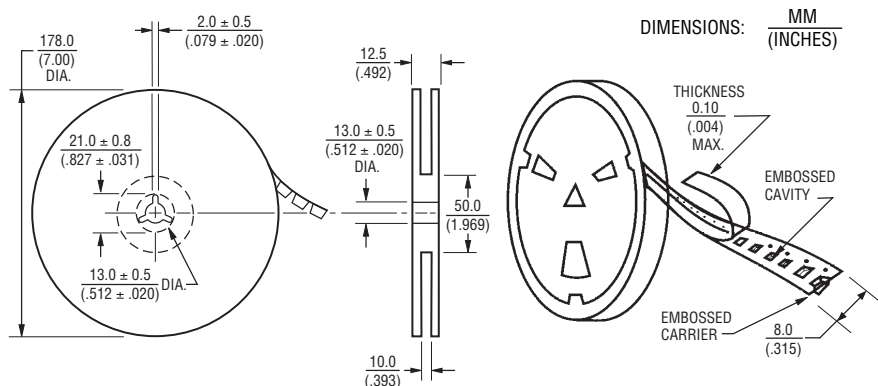


General Specifications

Temperature Rise40 °C max. at rated current
 Operating Temperature-40 °C to +125 °C
 Storage Temperature-40 °C to +125 °C
 Reflow Soldering .. 230 °C, 50 sec. max.
 Resistance to Soldering Heat +260 °C, 5 seconds


Materials

Core Material
 -10NK thru -R82JCeramic
 -1R0J thru -4R7JFerrite
 Wire Enameled copper (1W1E180)
 Terminal Mo/Mn+Ni+Au
 Packaging 2,000 pcs. per reel

Product Dimensions

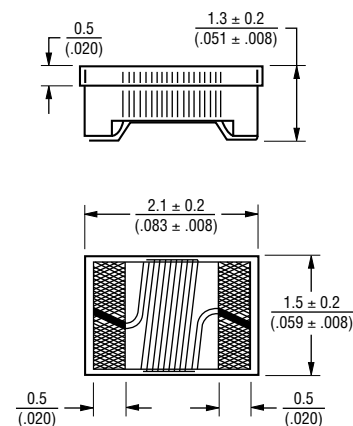

Recommended Layout

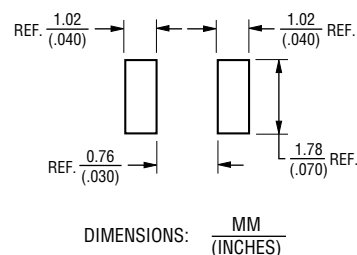

REV. 01/15

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.