

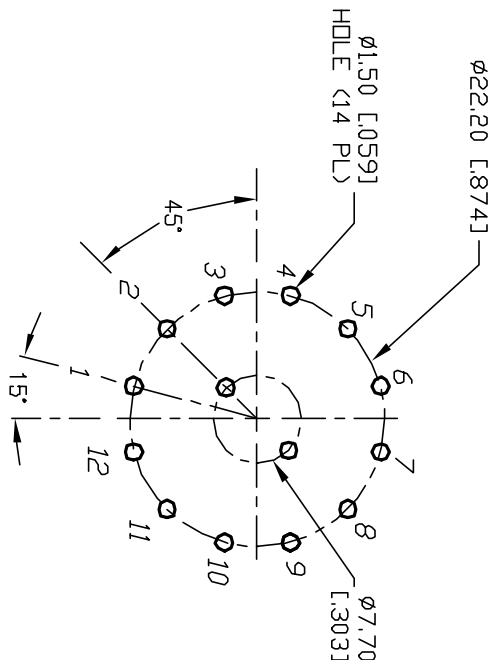
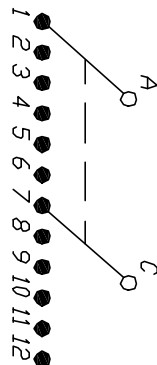


NOTES:

1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: $X.X=\pm 0.4$
 $X.XX=\pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
350mA, 110V AC/DC
5. OPERATING FORCE: 425 ± 100 CM/STANDARD
6. CONTACT MATERIAL: GOLD FLASH (AU FLASH OVER
1 MICRON AG OVER 2 Micron Ni)
7. OPERATING TEMP: -30° to 85° C
8. CIRCUIT DP: 6 POSITIONS, 30° INDEX.
9. DESIGNATE MAJOR DIMENSIONS
10. HARDWARE SUPPLIED ON SWITCH - SEE BELOW
STOPRING, LOCKWASHER, & HEXNUT

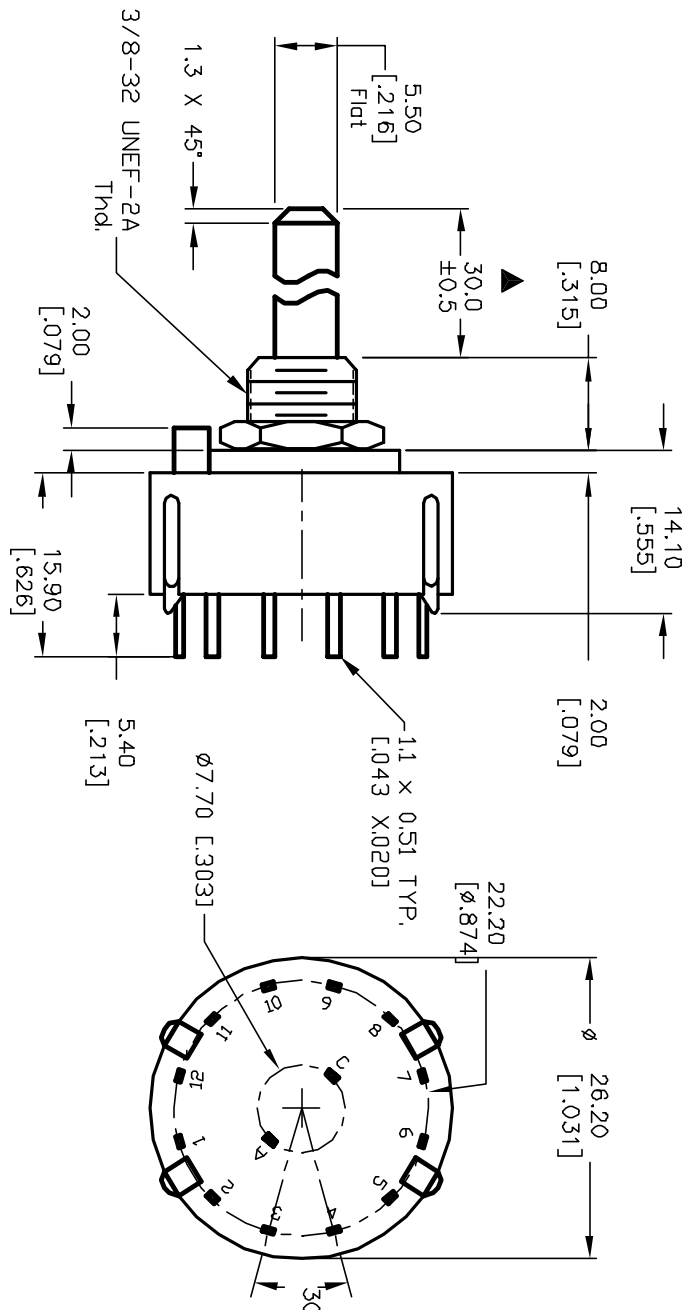

HARDWARE SUPPLIED
ON SWITCH

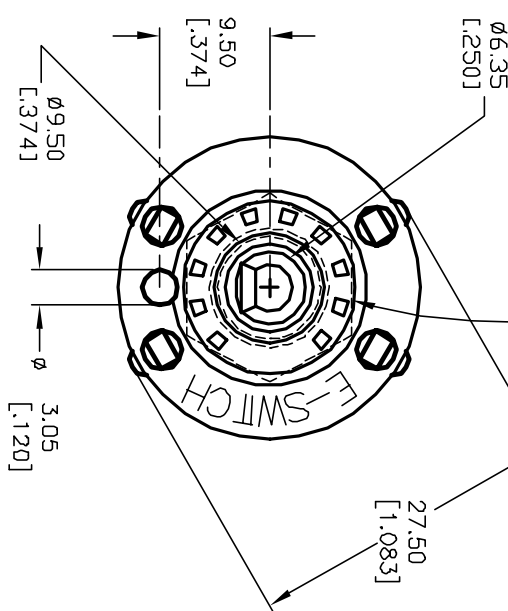

E-SWITCH®

TITLE				SCALE				DATE				DR				DWG				REV			
KC-26-A-(30.0mm)01-N-P-F				1.5:1				3/2/01				CJB				G510449				B			
REV. ECN No.				DESCRIPTION				DATE				CHKD											
A				RELEASED FOR PRODUCTION				3/2/01				CJB											
B				REV DESC/ NEW CATALOG				3/5/03				CJB											

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED