


SPECIFICATIONS		
SILIKROME® Material	GRADE	
	COMMERCIAL	MILITARY
	Silicone Rubber ASTM D 1418	Silicone Rubber conforming to A-A-59588 Class II GR 50
Temperature Range	-112°F to +400°F (-80°C to +204°C)	-160°F to +450°F (-106°C to +260°C)
	-112°F to +575°F (-80°C to +302°C)	
Shelf Life	25 Years (minimum)	
Resistant to	Salt spray, sunlight, ozone, cleaning solutions, and most acids	
Physical Characteristics	Flexible, non-breakable, re-usable. Acts as shock mount. Protects against shattering. Easy to mount.	

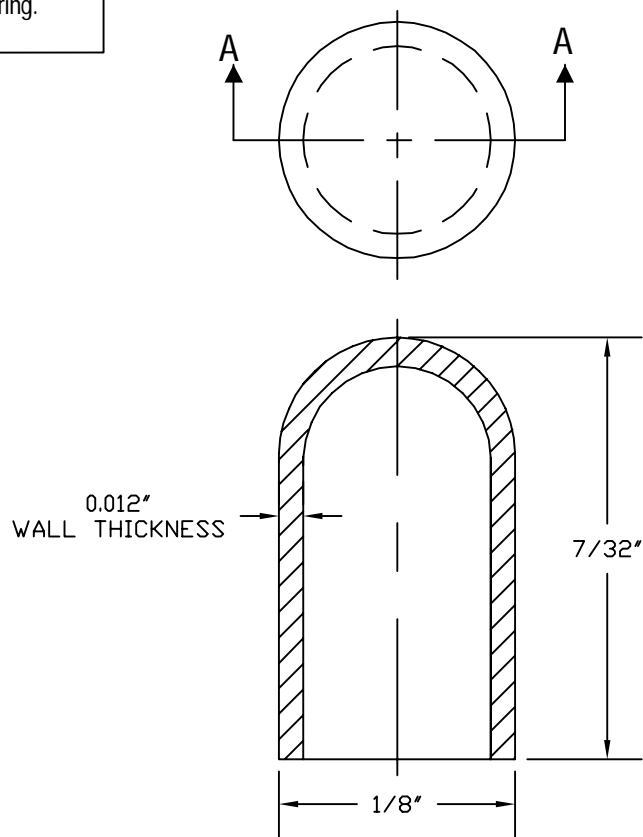

SECTION AA

D	REDRAWN and MAT'L CHANGED	S. GOK	05.28.09
C	CAD COMPUTER GENERATED		01.10.03
B	DWG NO. & P/N WAS 1813/7	NICK	06.14.65
A	REVISED TO ROUND TOP	NICK	12.11.64
REV.	DESCRIPTION	DATE	
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	TITLE SILIKROMES® COLORED FILTERS FOR INCANDESCENT T-3/4 LAMPS	ENG.	S. GOK 05.28.09
		DWN.	ED 05.25.62
		CHKD.	J. CELLA 05.28.09
COLOR: SPECIFY	APM-HEXSEAL CORPORATION	SCALE 10 : 1	DWG. NO. 1813/23

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[APM HEXSEAL:](#)

[1813/23](#) [1813/23 A2-12 C](#) [1813/23 B1 C](#) [1813/23 LW1 C](#) [1813/23 R3 C](#)