




Converter IC's: A/D

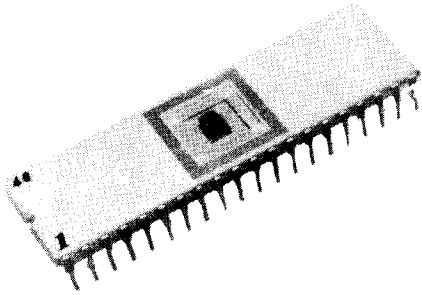

INTEGRATED-CIRCUIT ANALOG-TO-DIGITAL CONVERTERS

The Analog Devices' product line of IC A/D converters consists of 12 products. Cost/performance varies from 4ms 3-digit BCD conversions to 12-bit conversions in 2.2 μ s.

The new AD7574 provides 8 bits in 15 μ s and uses only 25mW of power from a single 5V supply. This single-chip CMOS device interfaces directly to microprocessors and has no missing codes over its rated operating temperature range.

The new 10- and 12-bit AD ADC80's are improved reduced chip-count (high reliability) replacements for the other ADC80 devices. Complete with internal reference, the AD ADC80 performs 12-bit conversion in 25 μ s.

The AD574 is a complete μ P-compatible 2-chip, 12-bit successive-approximation ADC. A built-in clock, comparator, reference, and 3-state output buffers allow direct interface with 8-, 12-, or 16-bit microprocessors. The use of laser-trimmed, thin-film resistors guarantees no missing codes over commercial and military temperature ranges.

The AD570 and AD571 are complete 8- and 10-bit monolithic A/D converters, using I^2L successive-approximation logic. The clock, voltage reference, laser-trimmed DAC, and 3-state buffers are included on the chip. No external components are needed for full-accuracy 8- and 10-bit conversion in 25 μ s.

The AD572, a complete 12-bit hybrid IC successive-approximation A/D converter, includes internal clock, reference comparator, and buffer amplifier. It utilizes MSI digital and linear monolithic chips and active laser trimming of high-stability thin-film resistors to provide modular performance, flexibility, and ease of use, combined with IC size, price and reliability.

The AD7550 is a 13-bit CMOS integrating A/D converter utilizing the patented "quad-slope" conversion technique. Three-state data output lines and byte control are provided for direct interfacing with microprocessors.

The AD7570 is a monolithic CMOS 10-bit successive-approximation A/D converter that requires only an external reference, comparator and passive clock components. Three-state data outputs simplify interfacing to microprocessors.

The AD2020 is a low-cost 3-BCD-digital I^2L integrating A/D converter chip for implementing a complete 3-digit DPM/DVM with only ten external components. It includes an on-chip reference and consumes only 50mW of power from a single +5V supply.

The HAS family of hybrid IC A to D converters offers extremely high speed without sacrificing precision. These 8-, 10- and 12-bit devices convert in a guaranteed 1.5 μ s, 1.7 μ s and 2.8 μ s respectively and guarantee no missing codes over temperature.

INTEGRATED CIRCUIT ANALOG-TO-DIGITAL CONVERTERS SPECIFICATIONS (typical @ +25°C unless otherwise noted)

Model	Description	Resolution	Accuracy	Differential Nonlinearity	Gain T.C.	Conversion Time	Power Dissipation	Temp Range*	DIP Package	Price — \$ (100's)
AD570JD	8-bit bipolar A/D	8 Bits	±1/2LSB	No missing codes over temperature	17ppm/°C max	25µs	275mW max	C	18 Pin	16.30
AD570SD	complete with	8 Bits	±1/2LSB		80ppm/°C max	25µs	275mW max	M	Ceramic	33.05
AD570SD/883B	reference, clock, comparator	8 Bits	±1/2LSB		80ppm/°C max	25µs	275mW max	M		38.65
AD570JD	8- & 10-bit, ratio-metric CMOS, successive approximation	8 Bits	±0.19% max	No missing codes	10ppm/°C max	20µs	40mW max	C	28 Pin	24.00
AD570LD		10 Bits	±0.05% max		10ppm/°C max	40µs	40mW max	C	28 Pin	49.00
AD574JN	8-bit fast, ratio-metric CMOS	8 Bits	±3/4LSB max	No missing codes over temperature	ΔG: ±2LSB ΔT: 100°C ¹	15µs	25mW max	C	18 Pin	7.50
AD574KN	successive	8 Bits	±1/2LSB max			15µs	25mW max	C	Plastic	9.00
AD574AD	approximation	8 Bits	±3/4LSB max			15µs	25mW max	I		9.50
AD574AD/883B	μP compatible	8 Bits	±3/4LSB max			15µs	25mW max	I	18 Pin	14.50
AD574BD		8 Bits	±1/2LSB max			15µs	25mW max	I	Ceramic	11.00
AD574BD/883B		8 Bits	±1/2LSB max			15µs	25mW max	I		16.00
AD574SD		8 Bits	±3/4LSB max			15µs	25mW max	M		19.00
AD574SD/883B		8 Bits	±3/4LSB max			15µs	25mW max	M		24.00
AD574TD		8 Bits	±1/2LSB max			15µs	25mW max	M		22.00
AD574TD/883B		8 Bits	±1/2LSB max			15µs	25mW max	M		27.00
AD571J	10-bit bipolar A/D	10 Bits	±1LSB max	No missing codes	88ppm/°C	30µs max	275mW max	C		28.35
AD571K	complete with	10 Bits	±1/2LSB max		44ppm/°C	30µs max	275mW max	C	18 Pin	32.15
AD571S	reference, clock comparator	10 Bits	±1LSB max		40ppm/°C	30µs max	275mW max	M	Ceramic	61.60
AD2020	1 ² L 3 digit A/D converter	3 Digits	±0.05% Rdg. ±1 Digit	No missing codes	50ppm/°C	4ms	50mW	C	16 Pin	9.00
AD ADC80-10	Improved second	10 Bits	±1/2LSB max	No missing codes over temperature	30ppm/°C max	21µs max	800mW	I	32 Pin	49.50
AD ADC80Z-10 ²	source for ADC80	10 Bits	±1/2LSB max		30ppm/°C max	21µs max	800mW	I	Ceramic	51.50
AD ADC80-12		12 Bits	±1/2LSB max		30ppm/°C max	25µs max	800mW	I		52.00
AD ADC80Z-12 ²		12 Bits	±1/2LSB max		30ppm/°C max	25µs max	800mW	I		54.00
AD572A	12-bit bipolar A/D	12 Bits	±0.012% max	±1/2LSB max	30ppm/°C max	25µs max	900mW	I	32 Pin	76.50
AD572B	with reference, comparator, buffer	12 Bits	±0.012% max	No missing codes	15ppm/°C max	25µs max	900mW	I	Metal	120.50
AD572S		12 Bits	±0.012% max		25ppm/°C max**	25µs max	900mW	M		234.50
AD574JD	12-bit complete	12 Bits	±1LSB		50ppm/°C max	35µs max	455mW	C		34.50
AD574KD	successive	12 Bits	±1/2LSB		27ppm/°C max	35µs max	455mW	C		44.50
AD574LD	approximation	12 Bits	±1/2LSB		10ppm/°C max	35µs max	455mW	C		65.00
AD574SD	A/D including	12 Bits	±1LSB	No missing codes	50ppm/°C max	35µs max	455mW	M	28 Pin	95.00
AD574TD	reference and clock	12 Bits	±1/2LSB		25ppm/°C max	35µs max	455mW	M	Ceramic	130.00
AD574UD	μP compatible	12 Bits	±1/2LSB		12.5ppm/°C max	35µs max	455mW	M		190.00
AD7550BD	13-bit, quad slope A/D	13 Bits	±1LSB max	No missing codes	1ppm/°C	40ms	9mW	C	40 Pin	25.00
HAS-0802	Ultra fast complete	8 Bits	±1/4LSB	No missing codes	30ppm/°C	1.2µs	1.8W	C***	32 Pin	133.00
HAS-1002	successive approximation A/D's with	10 Bits	±1/2LSB	codes over temperature	30ppm/°C	1.4µs	1.8W	C***	32 Pin	149.00
HAS-1202	clock, ref, comparator	12 Bits	±1/2LSB		30ppm/°C	2.2µs	1.8W	C***	32 Pin	173.00

*C = 0 to +70°C, I = -25°C to +85°C, M = -55°C to +125°C
 ***Extended temperature ranges available; consult factory.
 **±15ppm/°C max for temperature range -25°C to +85°C
 †Gain error over temperature
 ‡±12V Operation