

EC axial fans mains-powered

S series, Ø 315




- **Material:** Guard grille: Steel, phosphated and coated in black plastic
Wall ring: Sheet steel, pre-galvanised and coated in black
Blades: Sheet steel, coated in black
Rotor: Coated in black
Electronics enclosure: Die-cast aluminium, coated in black
- **Number of blades:** 5
- **Direction of rotation:** Dir. of air flow "V" counter-clockwise, "A" clockwise, seen on rotor
- **Type of protection:** IP 44
- **Insulation class:** "B"
- **Mounting position:** Shaft horizontal or rotor on bottom (rotor on top on request)
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage range	Frequency	Speed/rpm	Max. power Input ⁽¹⁾	Max. current draw ⁽¹⁾	Max. operative range	Perm. amb. temp.	Mass without attachments	Electr. connection
Type	Motor		VAC	Hz	rpm	W	A	Pa	°C	kg	p. 423
*3G 315	M3G 074-CF	(A)	1~ 100-130	50/60	1670	160	2.10	110	-25 to +60	2.9	J1)
*3G 315	M3G 074-CF	(B)	1~ 200-277	50/60	1660	170	1.30	130	-25 to +60	2.9	J1)

subject to alterations (1) Nominal data in operating point with maximum load and 115 or 230 VAC

Curves

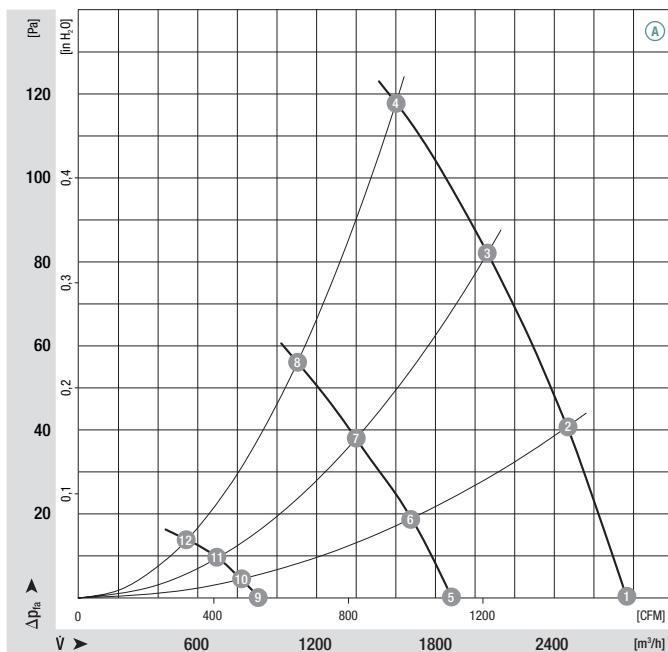

	n [rpm]	P ₁ [W]	I [A]	Lp _A [dB(A)]	η _{HL} [%]
(A) 1	1670	109	1.40	63	—
(A) 2	1660	118	1.50	62	53
(A) 3	1630	126	1.60	62	60
(A) 4	1610	138	1.80	60	55
(A) 5	1130	38	0.60	53	—
(A) 6	1120	42	0.60	52	48
(A) 7	1120	45	0.60	52	54
(A) 8	1110	49	0.70	50	50
(A) 9	560	8	0.10	32	—
(A) 10	560	9	0.20	31	25
(A) 11	560	9	0.20	31	33
(A) 12	560	10	0.20	29	30

- **Technical features:**

• PFC (passive)

• Control input 0-10 VDC / PWM

– **EMC:** Interference emission acc. to EN 61000-6-3

Interference immunity acc. to EN 61000-6-2

Harmonics acc. to EN 61000-3-2/3

– **Leakage current:** < 3.5 mA acc. to EN 60950-1

– **Cable exit:** Variable

– **Protection class:** I

– **Product conforming to standards:** EN 60335-1, EN 61800-5-1, EN 60950-1, CE


– **Approvals:** VDE, UL, CSA, CCC, GOST are applied for
- Output 10 VDC max. 1.1 mA

• Tach output

• Over-temperature protected electronics / motor

Direction of air flow				
	< "V"/"A" > Without attachments	< "V"/"A" > With full round nozzle	< "V"/"A" > With guard grille for full nozzle	< "V"/"A" > With guard grille for short nozzle
"V"	A3G 315-AA76 -01	W3G 315-CA76 -01	S3G 315-BA76 -01	S3G 315-AA76 -01
"A"	A3G 315-AA76 -02	W3G 315-CA76 -02	S3G 315-BA76 -02	S3G 315-AA76 -02
"V"	A3G 315-AA58 -01	W3G 315-CA58 -01	S3G 315-BA58 -01	S3G 315-AA58 -01
"A"	A3G 315-AA58 -02	W3G 315-CA58 -02	S3G 315-BA58 -02	S3G 315-AA58 -02

Curves

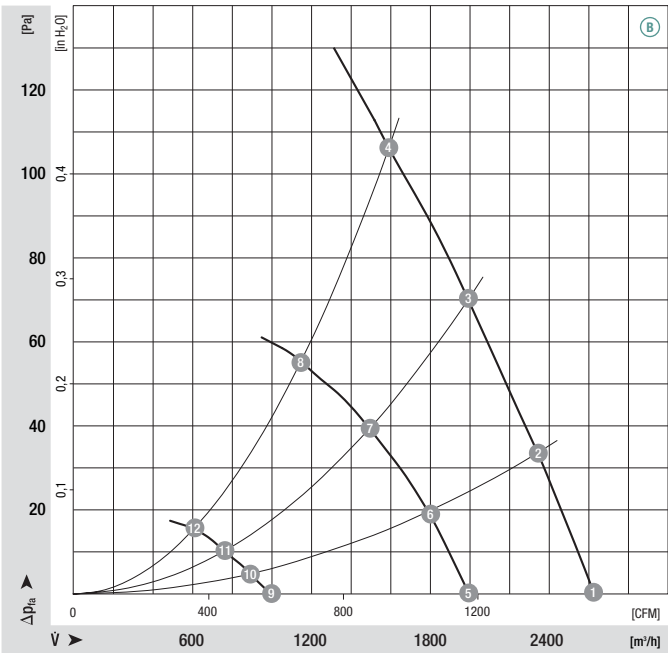


	n [rpm]	P ₁ [W]	I [A]	Lp _A [dB(A)]	η _{HL} [%]
Ⓑ ①	1660	110	0.80	62	—
Ⓑ ②	1640	119	0.90	61	43
Ⓑ ③	1625	125	0.90	62	52
Ⓑ ④	1610	135	1.00	60	50
Ⓑ ⑤	1250	50	1.00	55	—
Ⓑ ⑥	1250	55	1.00	54	24
Ⓑ ⑦	1220	55	1.00	54	40
Ⓑ ⑧	1170	57	1.00	52	43
Ⓑ ⑨	640	11	0.40	35	—
Ⓑ ⑩	630	12	0.40	34	17
Ⓑ ⑪	630	12	0.50	34	31
Ⓑ ⑫	620	13	0.50	33	37

EC axial fans mains-powered

S series, Ø 315, drawings of directions of air flow "V" and "A"



Without attachments

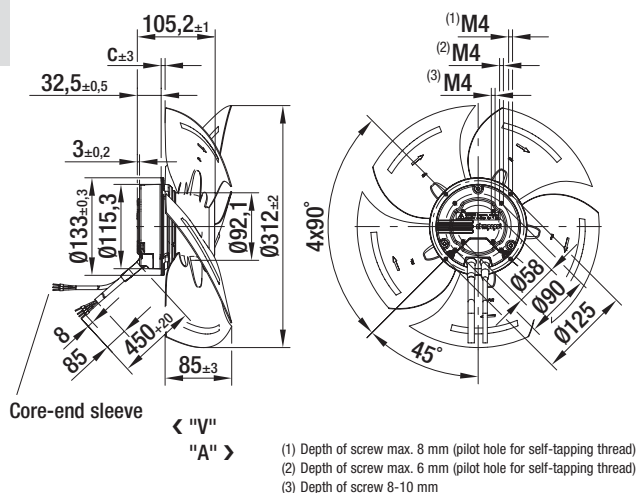


Type

c

A3G 315-AA76 -01	"V"	6.0
A3G 315-AA76 -02	"A"	-6.0
A3G 315-AA58 -01	"V"	6.0
A3G 315-AA58 -02	"A"	-6.0



With full round nozzle

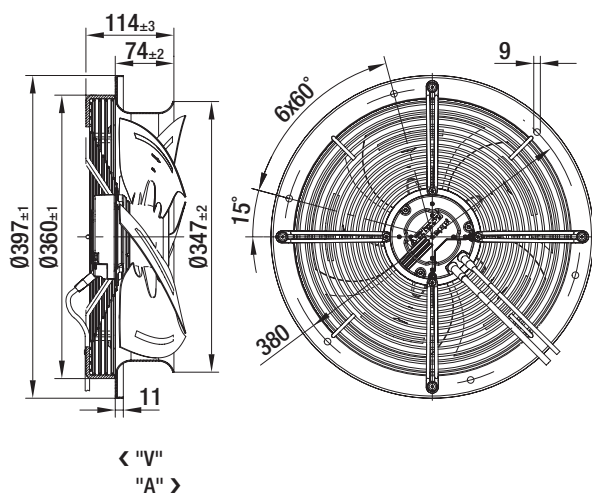


Type

W3G 315-CA76 -01	"V"
W3G 315-CA76 -02	"A"
W3G 315-CA58 -01	"V"
W3G 315-CA58 -02	"A"



With guard grille for full nozzle

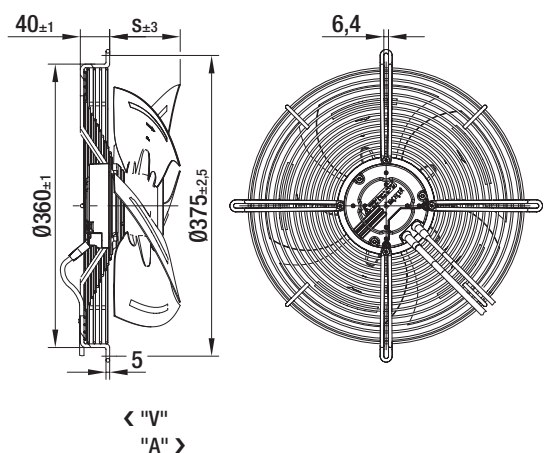


Type

s

S3G 315-BA76 -01	"V"	91.0
S3G 315-BA76 -02	"A"	79.0
S3G 315-BA58 -01	"V"	91.0
S3G 315-BA58 -02	"A"	79.0



With guard grille for short nozzle

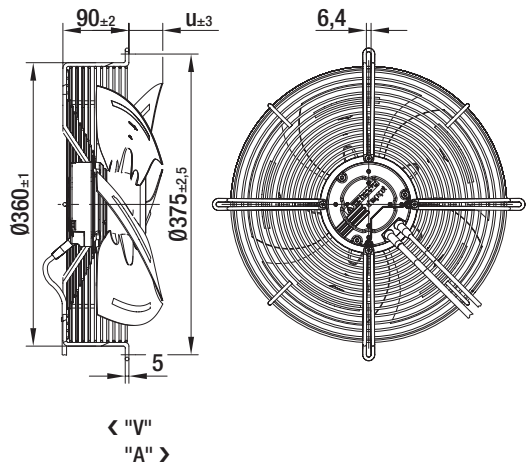

Type	u	
S3G 315-AA76 -01	"V"	41.0
S3G 315-AA76 -02	"A"	29.0
S3G 315-AA58 -01	"V"	41.0
S3G 315-AA58 -02	"A"	29.0

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ebm-papst:](#)

[A3G330-AA58-02](#)