



SMT power inductors

Size 12 x 12 mm

Series/Type:	B82477G2
Date:	January 2006
Pages	-5- (incl. title)



Size 12x12 mm
Rated inductance 1,0..1000 μ H

Construction

- Ferrite core
- Magnetically shielded
- Winding: enamel copper wire
- Winding soldered to terminals

Features

- Wide temperature range
- Very high rated current
- Low DC resistance
- Suitable for reflow soldering

Applications

- Filtering of supply voltages
- Coupling, decoupling
- DC/DC converters
- Automotive electronics

Terminals

- Tinned

Marking

Marking on component:

Manufacturer

L value (in μ H)

Date code

Minimum marking on reel:

Manufacturer, part number, ordering code,

L value and tolerance

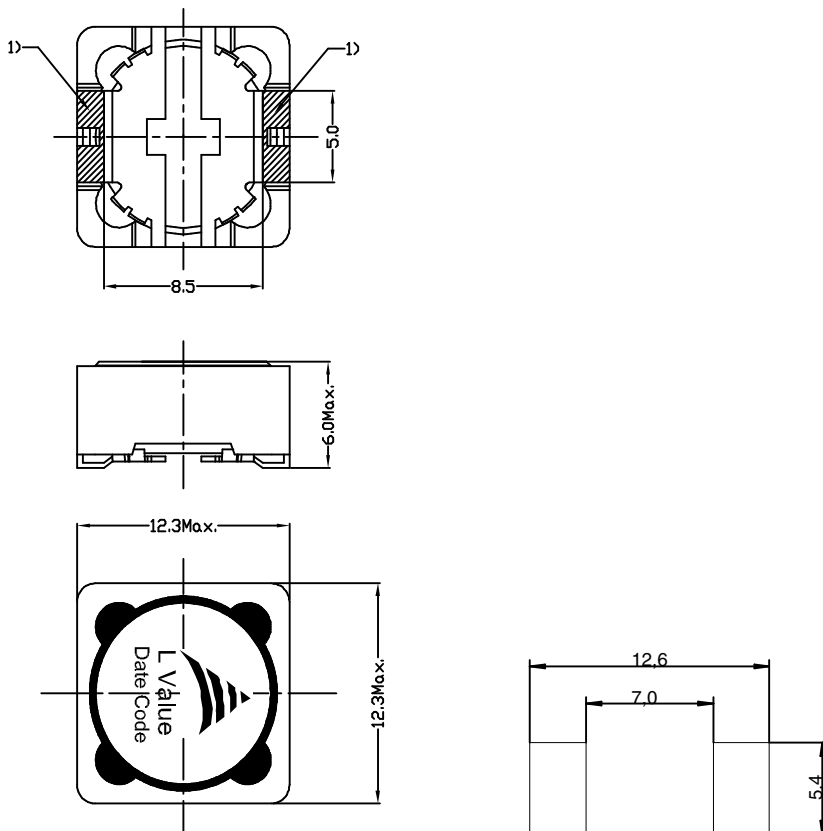
quantity, date of packing

Delivery mode

Blister tape 24mm, reel packing $\varnothing$ 330mm
packaging quantity 600 pcs/reel


General technical data

Rated inductance L_R	Measured with HP 4284A, measuring voltage 100 mV
DC resistance R_{max}	Measured at 20 °C ambient temperature
Rated current I_R	Maximum permissible DC with temperature increase of ≤ 40 K at ambient temperature of 85 °C or inductance decrease $\Delta L/L_0 \approx 25\%$ whichever is less
Climatic category	In accordance with IEC 60068–1 55/125/56 (–55 °C/ +125 °C/ 56 days damp heat test)
Solderability	5s, 235°C, wetting > 90%
Weight	Approx. 4g

Dimensional drawing and layout recommendation


1) Soldering area

tolerances $\pm 0,2$ mm unless otherwise noted


Characteristics and ordering code

L_R μH	f_L kHz	Tolerance	I_R A	R_{max} Ω	Ordering code
1,0	1	20 %	9,00	0,009	B82477G2102M000
1,3	1	20 %	8,70	0,010	B82477G2132M000
2,2	1	20 %	7,00	0,014	B82477G2222M000
3,3	1	20 %	6,00	0,017	B82477G2332M000
4,7	1	20 %	5,00	0,020	B82477G2472M000
6,8	1	20 %	4,40	0,022	B82477G2682M000
7,5	1	20 %	4,20	0,023	B82477G2752M000
10	1	20 %	4,00	0,025	B82477G2103M000
12	1	20 %	3,50	0,027	B82477G2123M000
15	1	20 %	3,30	0,030	B82477G2153M000
22	1	20 %	2,80	0,036	B82477G2223M000
33	1	20 %	2,10	0,057	B82477G2333M000
47	1	20 %	1,80	0,075	B82477G2473M000
68	1	20 %	1,50	0,120	B82477G2683M000
100	1	20 %	1,30	0,160	B82477G2104M000
150	1	20 %	1,00	0,230	B82477G2154M000
220	1	20 %	0,80	0,400	B82477G2224M000
330	1	20 %	0,68	0,510	B82477G2334M000
470	1	20 %	0,58	0,770	B82477G2474M000
680	1	20 %	0,48	1,200	B82477G2684M000
1000	1	20 %	0,40	1,530	B82477G2105M000

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as “hazardous”)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the “General Terms of Delivery for Products and Services in the Electrical Industry” published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, SilverCap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.