


DO NOT
SCALE FROM
THIS PRINT

TABLE 1	
LEAD STYLE	CONTACT
-02	C-8-03-XXX
-22	C-17-03-XXX

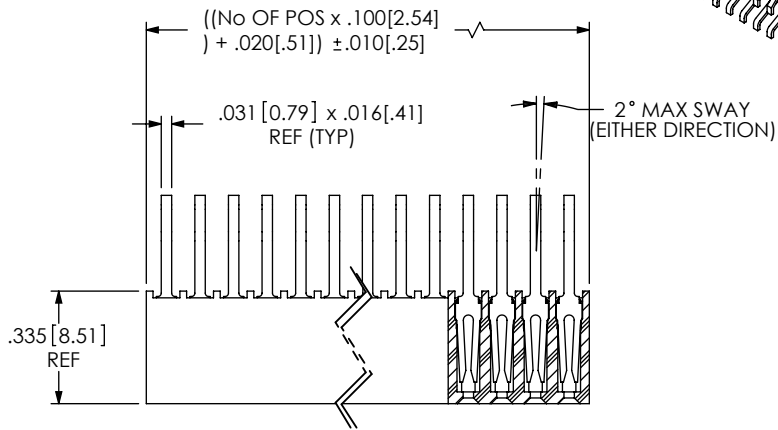

SECTION "A"-"A"


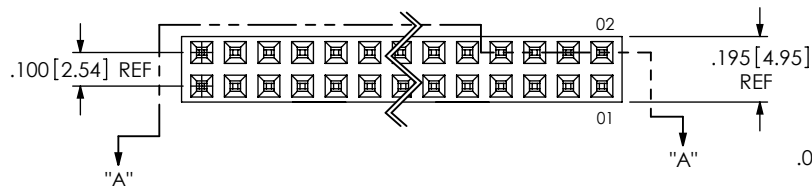


FIG 1
SMH-120-XX-XX-D SHOWN

SEE SHEET 2 FOR IN-PROCESS VIEWS

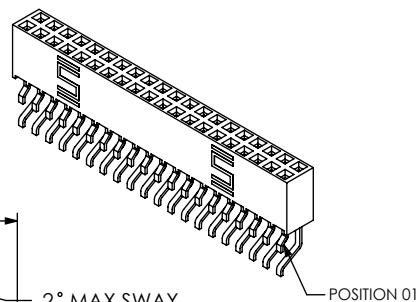

SMH-1XX-XX-XX-X-XX

NO. OF POSITIONS

-02 THRU -36
(PER ROW)

LEAD STYLE

-02: SURFACE MOUNT
(USE C-8-03-X)
-22: LOW INSERTION FORCE
(USE C-17-03-X)

OPTIONS



-XX: INDICATES POSITION
POLARIZED (USE PK-06-N)
-TR: TAPE & REEL PACKAGING
(2 - 29 POSITIONS ONLY)

ROW SPECIFICATION

-D: DOUBLE ROW (USE SMH-50-D)
(SEE FIG 1)
-S: SINGLE ROW (USE SSW-50-S)
(SEE FIG 2, SHT 2)

PLATING

-G: 20μ" OVER IN CONTACT AREA, FLASH GOLD ON TAIL
-T: TIN OVER, MATTE TIN ON TAIL
-S: 30μ" OVER IN CONTACT AREA, MATTE TIN ON TAIL
-F: 3μ" OVER IN CONTACT AREA, MATTE TIN ON TAIL
-H: 30μ" OVER IN CONTACT AREA, FLASH GOLD ON TAIL
-L: 10μ" OVER IN CONTACT AREA, MATTE TIN ON TAIL
-TM: TIN OVER, MATTE TIN ON TAIL
-SM: 30μ" OVER IN CONTACT AREA, MATTE TIN ON TAIL
-FM: 3μ" OVER IN CONTACT AREA, MATTE TIN ON TAIL

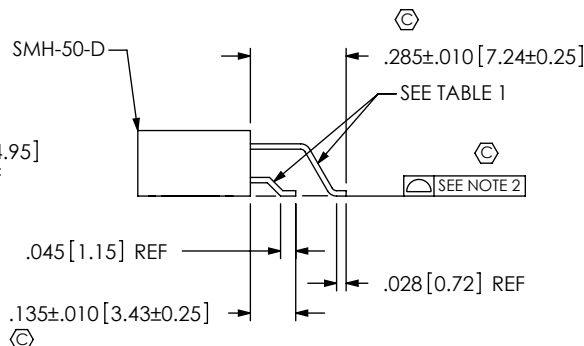

NOTES:

1. REPRESENTS A CRITICAL DIMENSION.
2. COPLANARITY: POSITIONS 02-24= .006[.15], POSITIONS 25-36= .008[.20].
3. BURR ALLOWANCE: .003[.08] MAX.
4. ONE POSITION WILL BE LOST FOR EVERY CUT MADE ON A SOCKET STRIP: CUT FLASH TO BE .010[.25] MAX WITH NO FLASH ALLOWED IN HOLES OR EXTENDING BELOW LEADS
5. MINIMUM PUSHOUT FORCE: 1.5 LB.
6. MAXIMUM ALLOWABLE BOW: .003[.08] INCH/INCH AFTER ASSEMBLY.
7. ENDWALLS AFTER CUTTING: .045 +/- .003.
8. SHEAR TAILS TO DIMENSION SHOWN.
9. CONTACT TAILS TO BE FLUSH TO .003[.08] ABOVE OR BELOW A DATUM LINE MADE BY THE INSULATOR. (-DH ONLY)
10. NOTE DELETED.
11. POSITIONS 4 OR LESS SHOULD BE LAYER PACKAGED UNLESS OTHERWISE NOTED IN THE PART CALLOUT.
12. NOTE DELETED.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES.

TOLERANCES ARE:

DECIMALS ANGLES
.XX: ±.01[.3] 2°
.XXX: ±.005[.13]
.XXXX: ±.0020[.051]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

samtec


520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 2:1
INSULATOR: LCP, UL 94 VO, COLOR: BLACK
CONTACT: PHOSPHOR BRONZE

DESCRIPTION:
.100[2.54] HORIZONTAL SMT SOCKET ASSEMBLY


DWG. NO. SMH-1XX-XX-XX-X-XX

BY: BRATCHER 2/5/99 SHEET 1 OF 3





IN-PROCESS 1

MUST FILL WITH DIE SIDE OF PIN FACING DOWN, PINS ARE STAMPED WITH A SQUARE INDICATOR MARK ON DIE SIDE

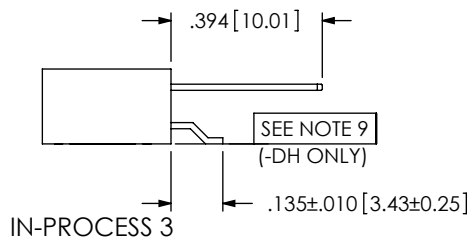


IN-PROCESS 3





IN-PROCESS 2

MUST FILL WITH DIE SIDE OF PIN FACING DOWN, PINS ARE STAMPED WITH A SQUARE INDICATOR MARK ON DIE SIDE

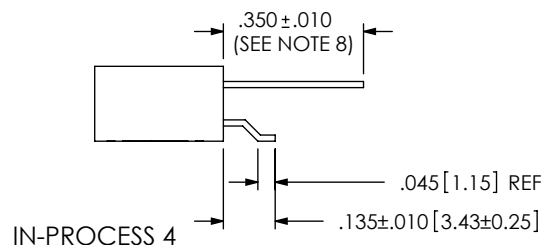

IN-PROCESS 4

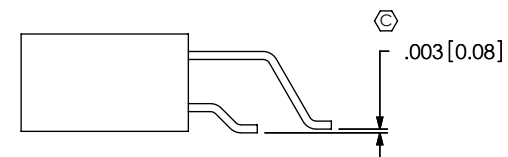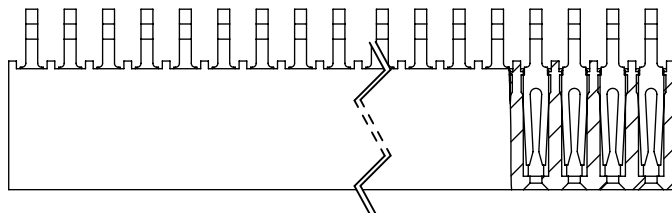

IN-PROCESS 5
TAILS MUST BE WITHIN +/- .003 WITH RESPECT TO EACH OTHER.



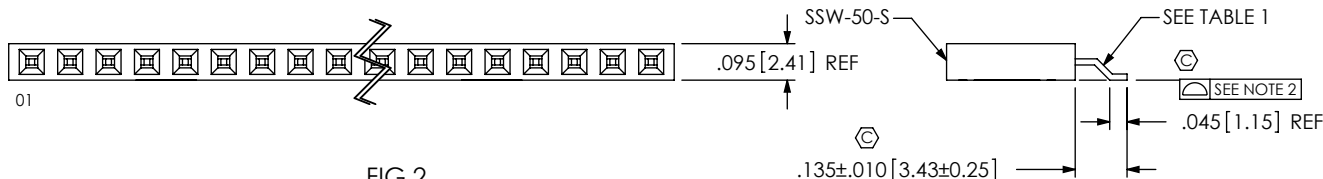



FIG 2
SMH-120-XX-XX-S SHOWN
(SAME AS FIG 1, UNLESS OTHERWISE STATED)



F:\DWG\MISC\MKTG\SMH-1XX-XX-XX-MKT.SLDDRW



IN-PROCESS 1

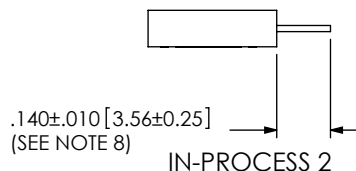

IN-PROCESS 2

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1







520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:
.100 [2.54] HORIZONTAL SMT SOCKET ASSEMBLY

DWG. NO.
SMH-1XX-XX-XX-X-XX

BY: BRATCHER 2/5/99 SHEET 2 OF 3

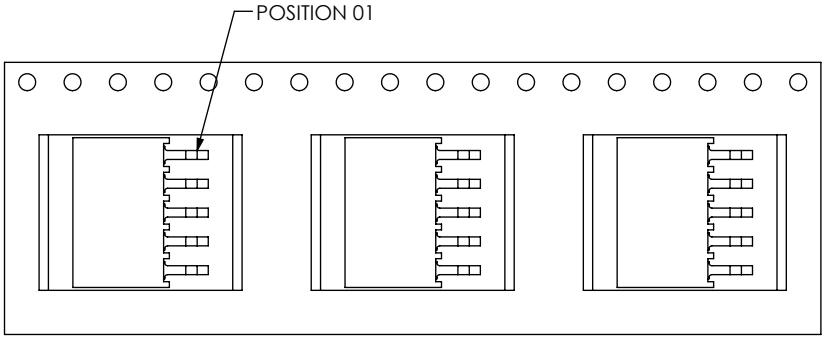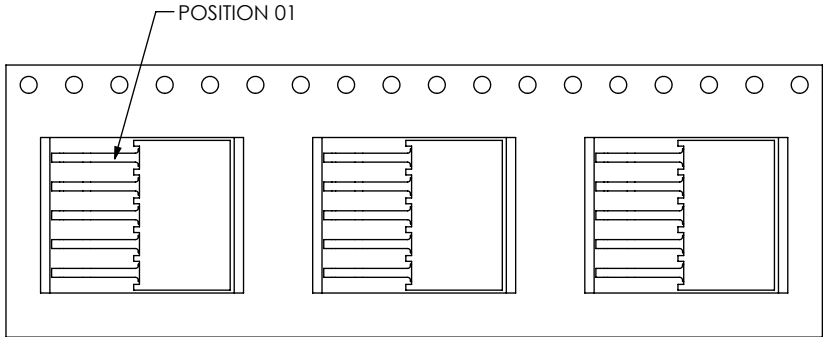

USER DIRECTION OF REELING →
POCKET NOT DETAILED



USER DIRECTION OF REELING →
POCKET NOT DETAILED

SHM-105-XX-XX-D-TR SHOWN

SHM-105-XX-XX-S-TR SHOWN

-TR PACKAGING VIEW

TUBE PACKAGING

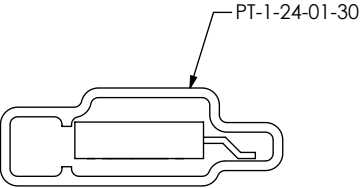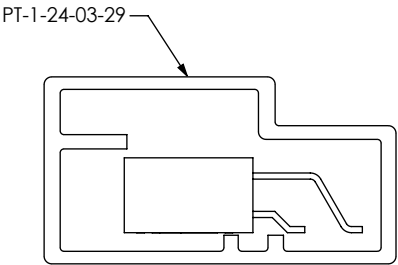

SEE NOTE 11

TABLE 2		
ROW	TUBE	PLUG
-S	PT-1-24-01-30	TP-07
-D	PT-1-24-03-29	TP-07

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:
.100 [2.54] HORIZONTAL SMT SOCKET ASSEMBLY

DWG. NO. SMH-1XX-XX-XX-X-XX

BY: BRATCHER 2/5/99 SHEET 3 OF 3