
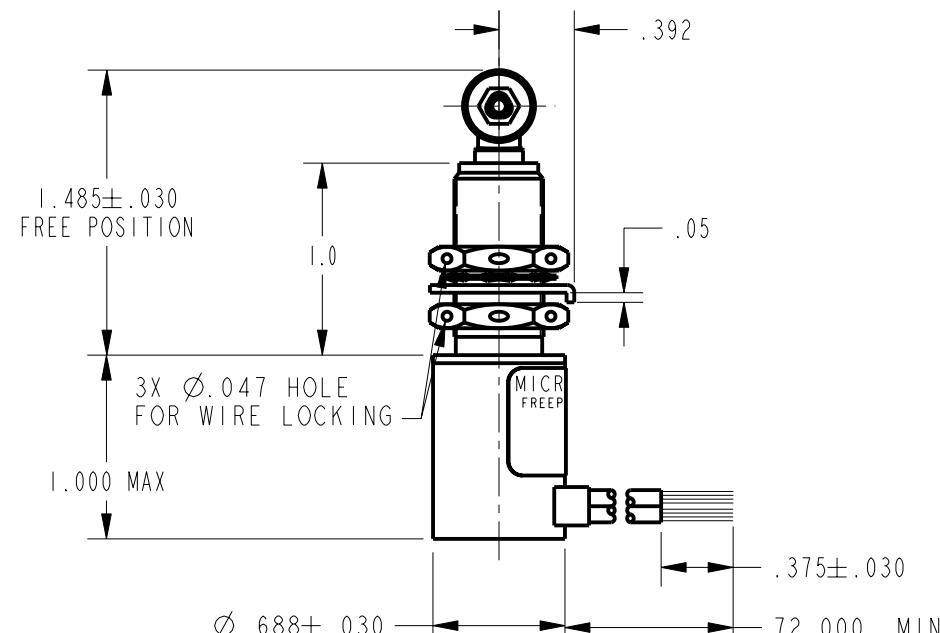



622EN226-6  
CATALOG LISTING  
PAGE 1 OF 1  
RELEASE NO. PR-22794  
REPLACES

ISSUE  
4  
REVISIONS  
A 201300  
G J W  
26 SEP 00

PTC/CAD 2D  
DRAWN  
G J W  
26 SEP 00

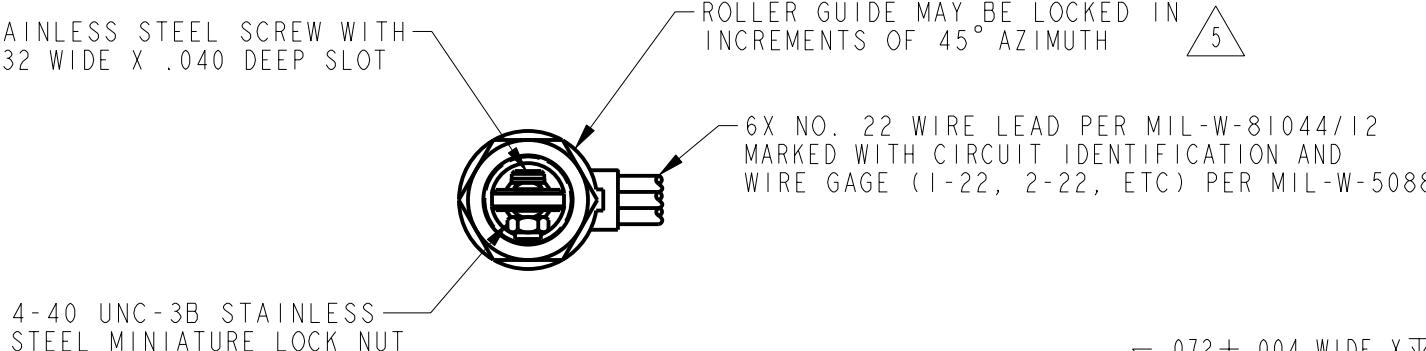

.072±.004 WIDE X  $\nabla$ .031±.003 KEYWAY  
TO WITHIN .250 OF SHOULDER

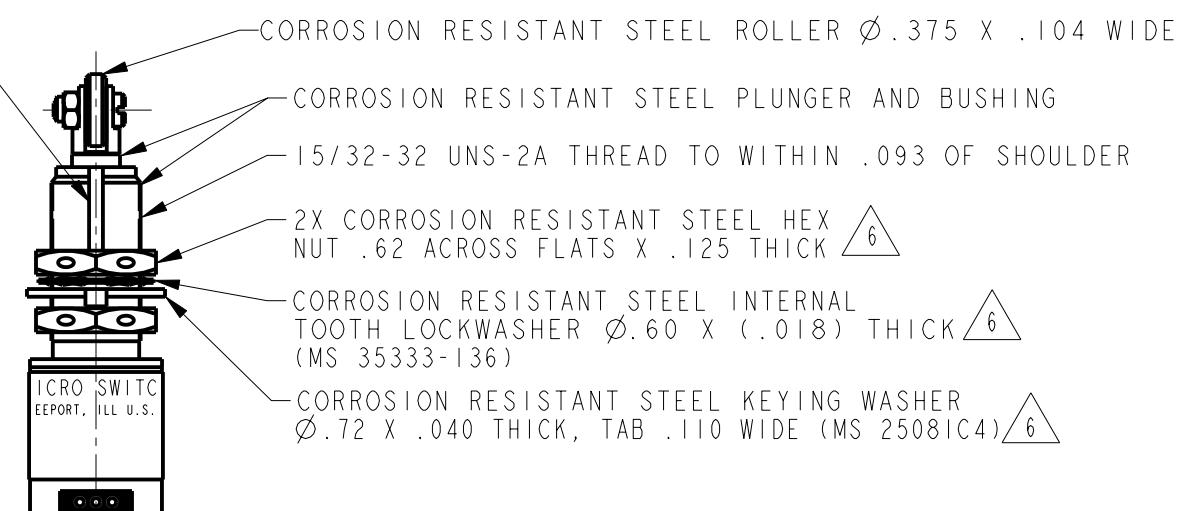

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED  
TOLERANCES ARE

ONE PLACE (.0)  $\pm$ .030

TWO PLACE (.00)  $\pm$ .015


THREE PLACE (.000)  $\pm$ .005

ANGLES  $\pm$

WEIGHT 8.0 OZ MAX

NOTES

- 1 - CORROSION RESISTANT STEEL ENCLOSURE
- 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
- 3 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
- 4 - CIRCUIT DIAGRAM AND CATALOG LISTING SHOWN ON LABEL  
TO ADJUST ROLLER DIRECTION, REMOVE LOCK NUT, SCREW AND ROLLER. DEPRESS PLUNGER UNTIL IT CAN BE ROTATED TO DESIRED POSITION. RETURN PLUNGER TO FREE POSITION AND REASSEMBLE ROLLER
- 5 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805 GOLD BIFURCATED CONTACTS

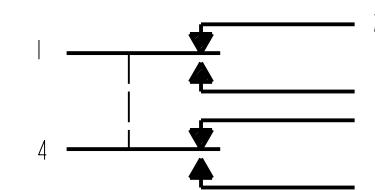

CIRCUIT DIAGRAM

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[622EN226-6](#)