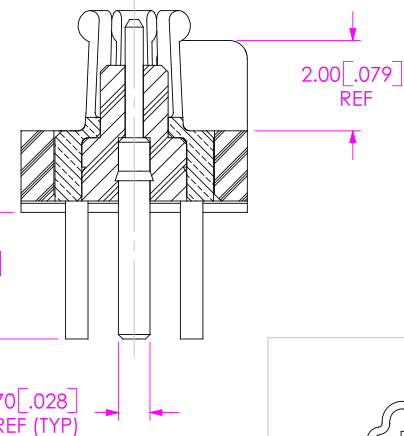
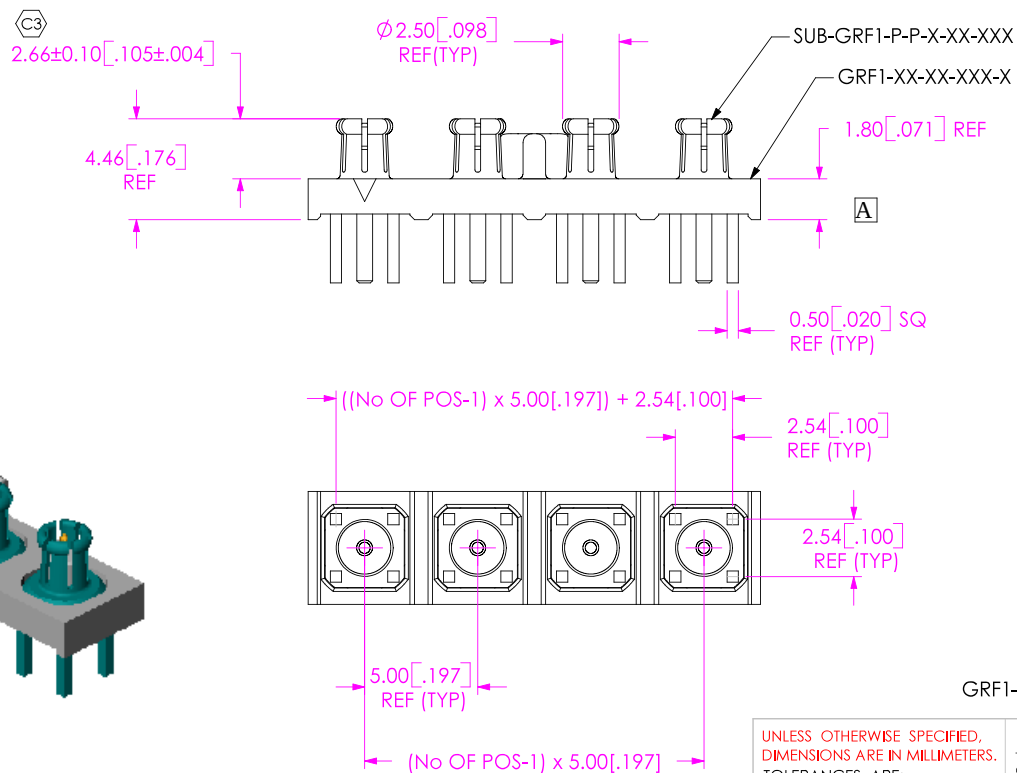
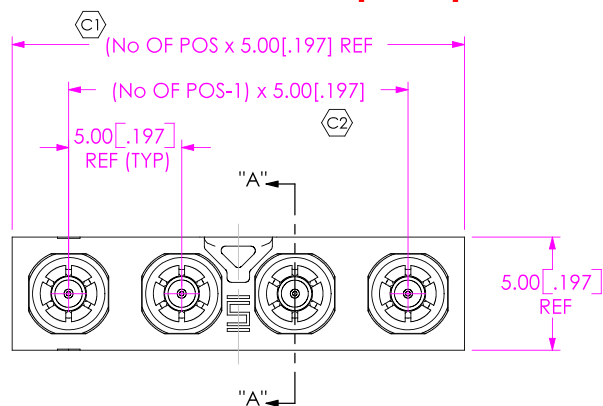



DO NOT
SCALE FROM
THIS PRINT

DESIGNED & DIMENSIONED

IN MILLIMETERS[INCHES]

SECTION "A"- "A"
SCALE 6:1PACKAGING VIEW
USE: PT-1-24-04-36-TP-24FIG. 1
GRF1-P-P-04-E-ST-TH1UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS.

TOLERANCES ARE:

DECIMALS

ANGLES

.X: ±0.3 [.01]

2°

.XX: ±0.13 [.005]

.XXX: ±0.051 [.0020]

MATERIAL:

DO NOT SCALE DRAWING

INSULATOR: LCP, COLOR: BLACK

SHELL: BRASS

PIN: BRASS

INSULATOR: TEFLON

C-RING: BeCu

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

SHEET SCALE: 3:1

SAMTEC

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812.944.6733 FAX: 812.948.5047
e-Mail: INFO@SAMTEC.COM CODE: 55322

DESCRIPTION:

GANGED RF PLUG CONNECTOR

DWG. NO.

GRF1-P-P-XX-X-XX-XXX

BY: CHAD F

9/8/2004

SHEET 1 OF 1

NOTES:

1. © REPRESENTS A CRITICAL DIMENSION.
2. MINIMUM PUSHOUT FORCE: 2.22N[.5 LB].