


C.A.D. FILE CODE
S. C345807.A

DO NOT SCALE

DIMENSIONS IN MM.

PRODUCT SPEC. 108-3069
APPLICATION SPEC. 114-3040

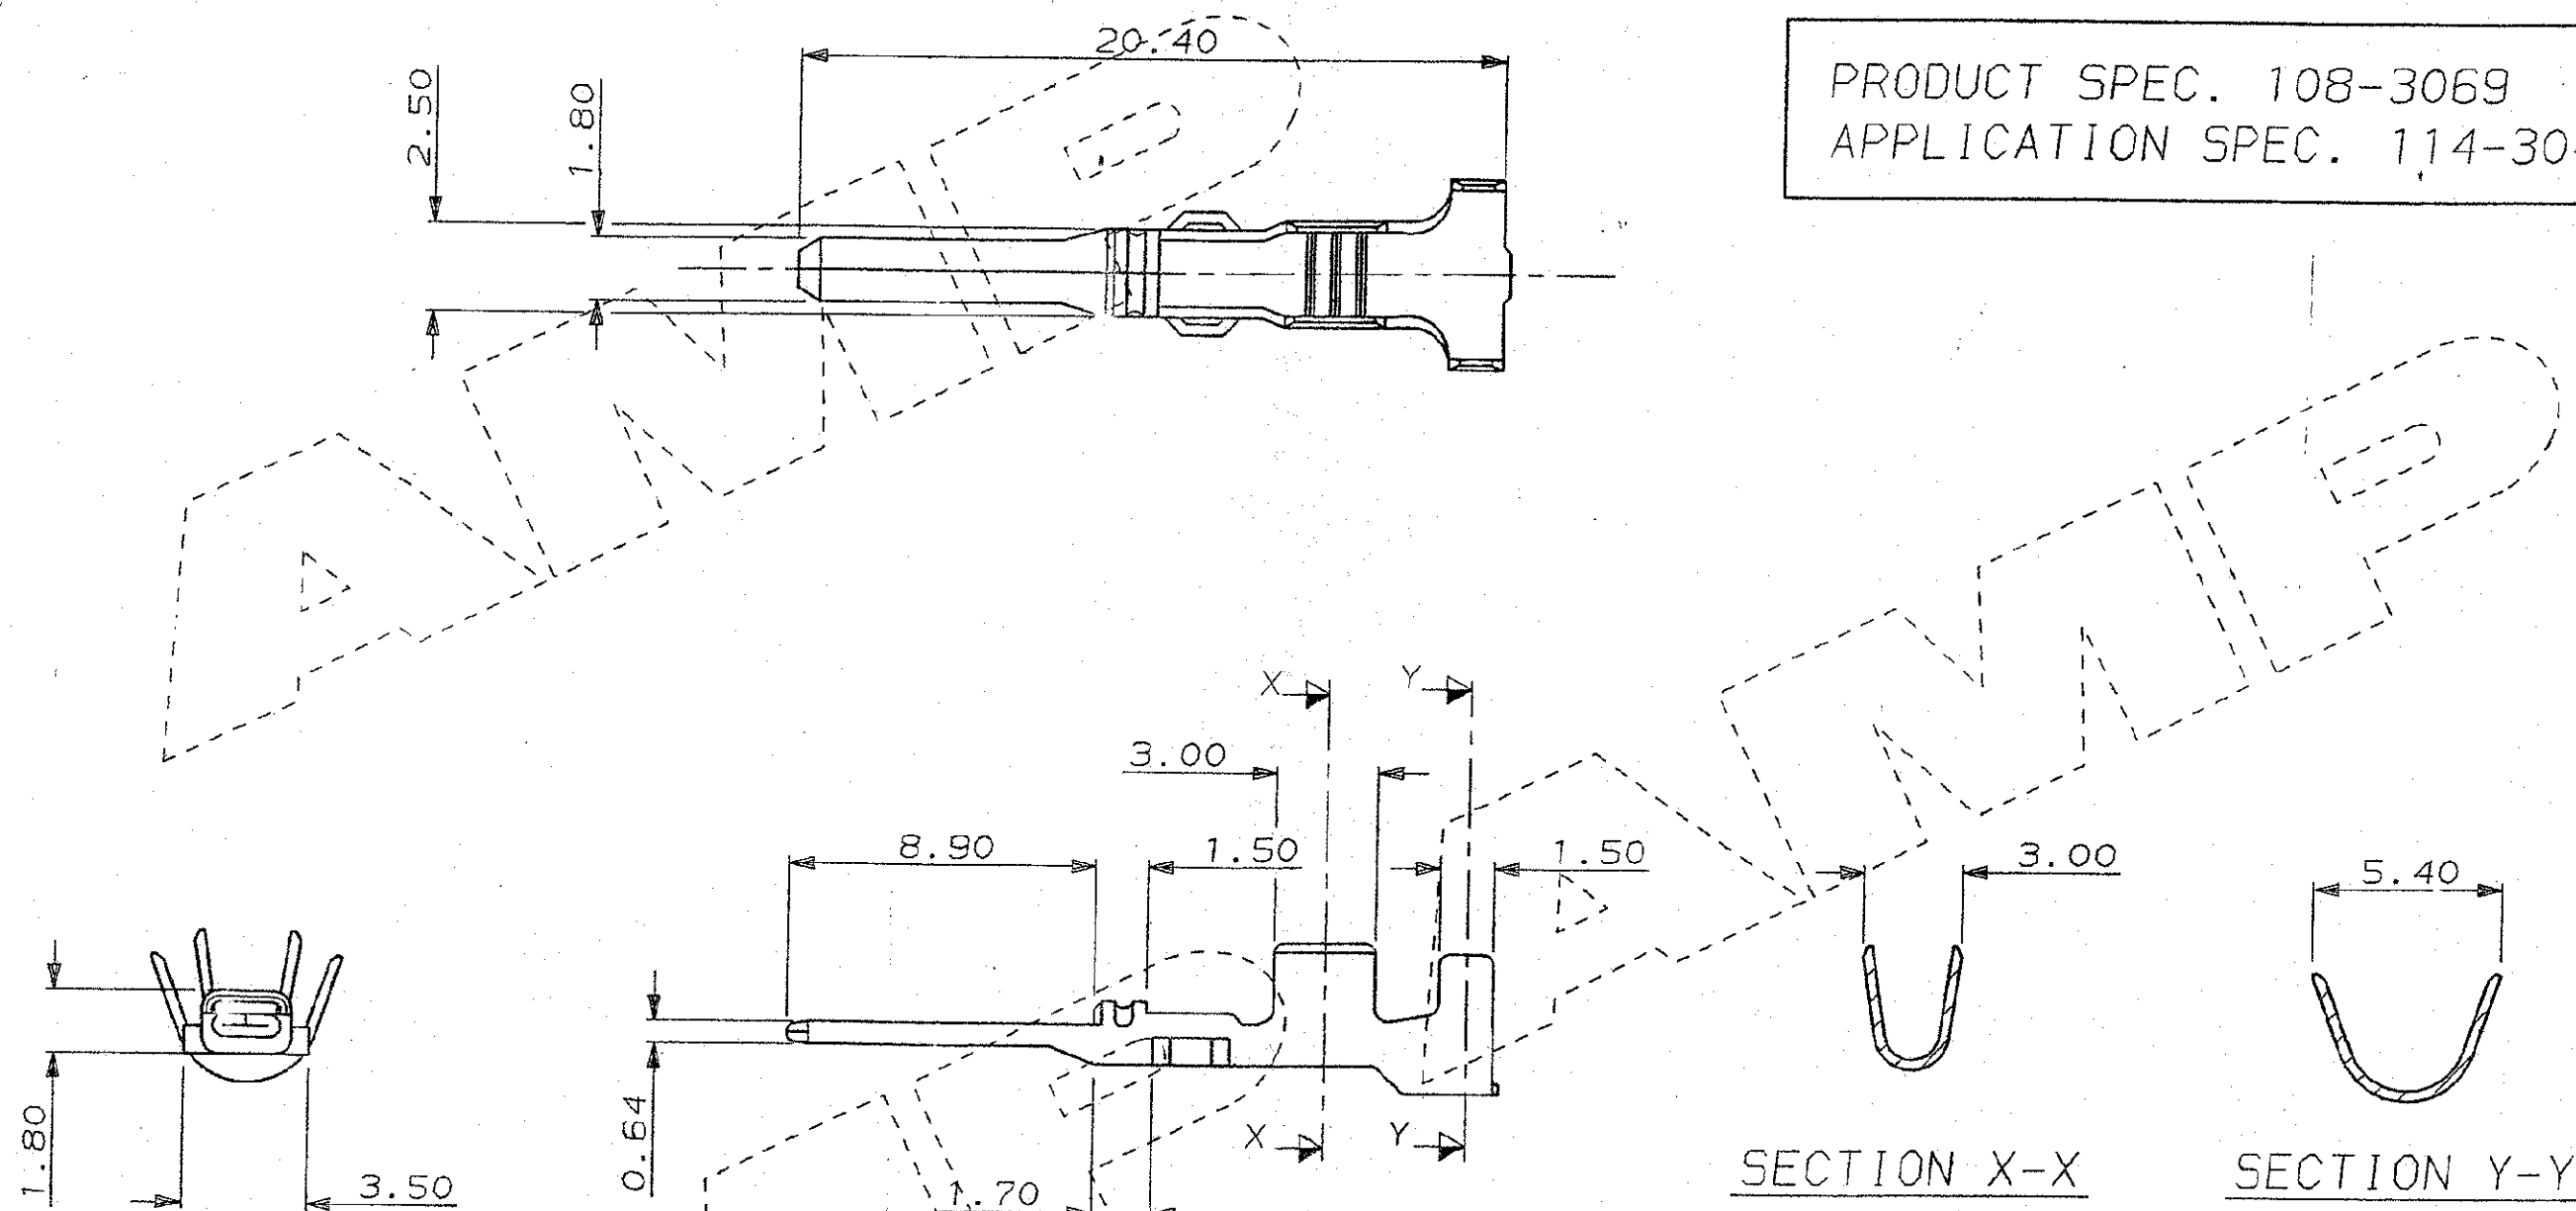

WIRE RANGE: 0.75 TO 2.00 MM²

FOR SEALED APPLICATIONS, SINGLE WIRES ONLY
MUST BE USED.

FOR UNSEALED APPLICATIONS, SINGLE WIRES
ARE SUITABLE FOR THE RANGE 0.75 TO 2.00 MM²
OR DOUBLE WIRES 2 X 0.50 MM² ONLY.

INSULATION RANGE: SINGLE WIRES 1.65 TO 2.70 MM DIA.
OR DOUBLE WIRES 2 X 1.6 MM DIA. ONLY.
THIN WALLED CABLE TO BE USED.

PRE-TINNED		BRASS		345807-1	
FINISH		MATERIAL		PART NUMBER	
CUSTOMER DWG		© COPYRIGHT 1990 BY AMP OF GREAT BRITAIN LTD.		RELEASED FOR PUBLICATION	
FOR REFERENCE ONLY		ALL INTERNATIONAL RIGHTS RESERVED. ALL PRODUCTS		14 SEP 1990	
		MAY BE COVERED BY BRITISH AND FOREIGN PATENTS AND/OR PATENTS PENDING.			
-	-	TOLERANCES		DR. R.S.	
-	-	UNLESS OTHERWISE		14.9.90	
-	-	STATED		CH. R.J.S.	
-	-	DEC ± 0.5		APP. J.P.	
-	-	ANGLES ± 1°		AMP	
-	-			of Great Britain Ltd.	
-	-			TERMINAL HOUSE	
-	-			STANMORE	
-	-			M100X.	
A	E600-0044-01	NAME		.070 TAB ECONOSEAL 3	
2	REL. TO CUST.	CS863		8.8.91	
1	PRELIM. ISSUE			14.9.90	
REV	APPROVED	ECN	DATE	SCALE	LOC
				5/1	E
				SIZE	DWG. No.
				A3	C345807
				REV	SHEET
				A	1/1