


SERIES 10**REED RELAY****REED RELAYS** SERIES 10

SERIES 10 RELAYS OFFER MANY UNIQUE DESIGN APPLICATION ADVANTAGES. ITS UNIQUE PACKAGE DESIGN IS MANUFACTURED USING MATERIALS TRACEABLE TO UL 94V-O RATINGS COUPLED WITH ITS ECONOMICAL PRICE MAKES THIS RELAY FAR SUPERIOR TO COMPETITIVE RELAYS.

USRELAYS SYSTEMS, PROCEDURES AND CONTROLS MEET MIL-Q-9858-A, AND HAVE BEEN APPROVED BY MAJOR ELECTRONIC COMPANIES AND GOVERNMENTAL AGENCIES. EXTENSIVE EQUIPMENT IS AVAILABLE FOR ON-LINE PRODUCTION TESTING OF ALL REED RELAYS. QUALITY CONTROL PROCEDURES MEET ALL REQUIREMENTS AND PARAMETERS OF MIL-1-45208A.

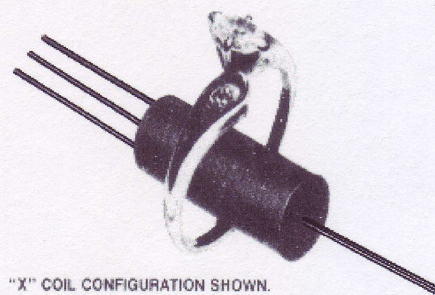

"X" COIL CONFIGURATION SHOWN.


THE **SERIES 10 RELAY** FAMILY CONSISTS OF 3 DISTINCT RELAY TYPES: THE **RX-2** FOR DRY CIRCUIT SWITCHING, THE **BLACK BEAUTY** FOR 3 TO 20 WATT SWITCHING, THE **POWER MAX** FOR 10 TO 50 WATT SWITCHING.

CONTACT RATINGS (RESISTIVE LOADS)


PARAMETERS	(R) RX-2	(B) BLACK BEAUTY	(P) POWER MAX
VOLTAGE (MAX. SWITCHING)	200 VDC	200 VDC	200 VDC
CURRENT (MAX. SWITCHING)	0.5 AMPS	1.0 AMPS	1.0 AMPS
POWER (MAX. SWITCHING)	5 WATTS	20 WATTS	50 WATTS
CURRENT (MAX. CARRY)	1.0 AMPS	2.0 AMPS	2.0 AMPS
CAPACITANCE (TYPICAL)	.2PF	.2PF	.2PF
CONTACT RESISTANCE (INITIAL)	.100 OHMS	.100 OHMS	.100 OHMS
OPERATE TIME (TYPICAL)	.5 MS	.5 MS	.5 MS
RELEASE TIME (TYPICAL)	.25 MS	.25 MS	.25 MS
TEMPERATURE	-55 °TO +85 °C	-55 °TO +85 °C	-55 °TO +85 °C
SHOCK	200 G @ 11MS DURATION	200 G @ 11MS DURATION	200 G @ 11MS DURATION
VIBRATION	50 G @ 0-2000 HZ	50 G @ 0-2000 HZ	50G @ 0-2000 HZ
INSULATION RESISTANCE	10 ¹⁰ @ 20 °C	10 ¹⁰ @ 20 °C	10 ¹⁰ @ 20 °C

DIMENSIONS UNIT (INCHES)

SERIES 10 RELAYS ARE CONSTRUCTED USING 94V-O BOBBINS AND TUBES. RUTHENIUM OR RHODIUM CONTACTS ARE USED EXTENSIVELY DEPENDING ON THE WATTAGE REQUIREMENTS. LEAD WIRES (.022 DIA) ARE PLATED WITH EASILY SOLDERABLE TIN FOR MAXIMUM SOLDERABILITY.

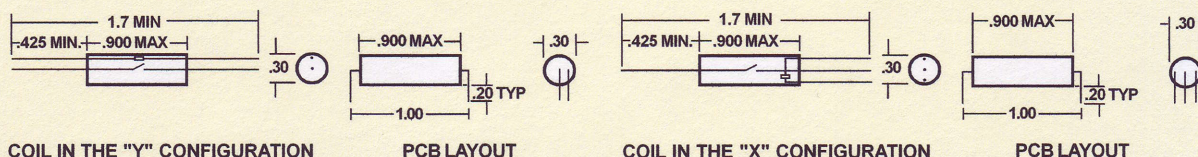**SURFACE MOUNT BENDING**

USRELAYS HAS COME UP WITH A WAY FOR OUR CUSTOMERS TO BE ABLE TO PURCHASE THE "X" TYPE SERIES 10 REED RELAY IN A SMT FORMAT. (GULL LEAD STYLE)
* SPECIAL PART NUMBERS WILL BE ISSUED.
CONSULT FACTORY.



EXTENSIVE CATALOG INFORMATION ON THE INTERNET
WWW.USRELAYS.COM



FOR YOUR CONVENIENCE JUST CHARGE IT!



USRELAYS AND TECHNOLOGY, INC.
 13851 ROSWELL AVENUE UNITS F/G CHINO, CA. 91710 U.S.A.

TEL (909) 902-5112
 FAX (909) 902-5122
WWW.USRELAYS.COM