

Apollo-3 Lenses for Luxeon®



- Use with Lumileds' lambertian Luxeon® I, III and K2 series of white and monochromate LEDs
- Lens material optical grade PMMA with high UV and temperature resistance (105°C/220°F)
- High optical efficiency, >85%
- No lens holder. Fastening to heat sink with droplets of glue. NOTE: legs go into the PCB by 1.2 mm only, do not go thru a normal MCPCB
- Diameter 50 mm (MR16)
- Medium lens is made using spot lens and placing a sub lens on top of it. Spot and wide lenses do not have sub lenses.
- Mechanical CAD models available upon request

LENS TYPES

NAME	ORDERING CODE	FWHM Angle
Apollo-3 spot	C10256_Apollo-3-S	±4°
Apollo-3 medium	CA10369_Apollo-3-M	±14°
Apollo-3 wide	C10363_Apollo-3-W	±23°



APOLLO-3-S



APOLLO-3-M




APOLLO-3-W


© Ledil Oy – PRELIMINARY - Subject to change without prior notice

MEASUREMENT DATA

Relative intensity of APOLLO-3-S

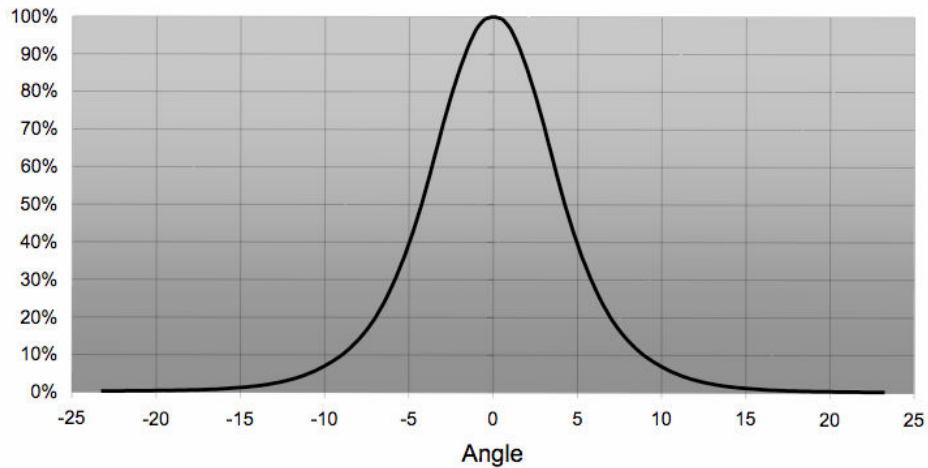


Relative intensity of Apollo-3-M

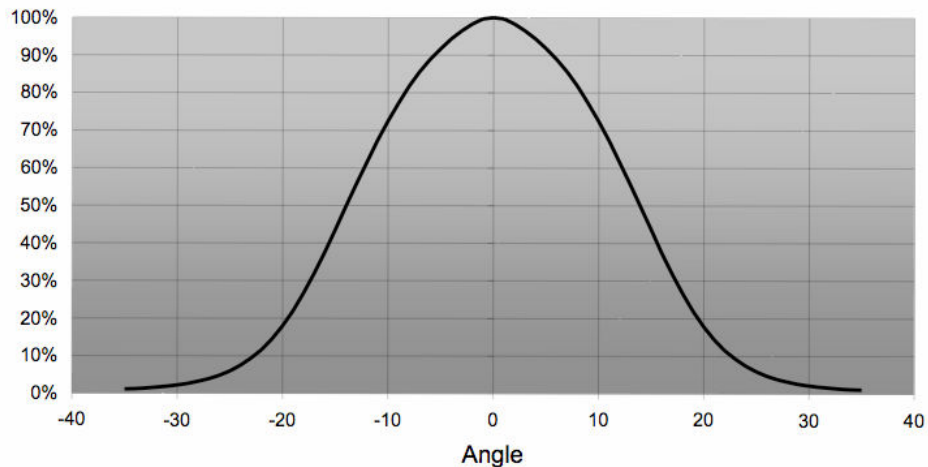

© Ledil Oy – PRELIMINARY - Subject to change without prior notice


Relative intensity of APOLLO-3-W

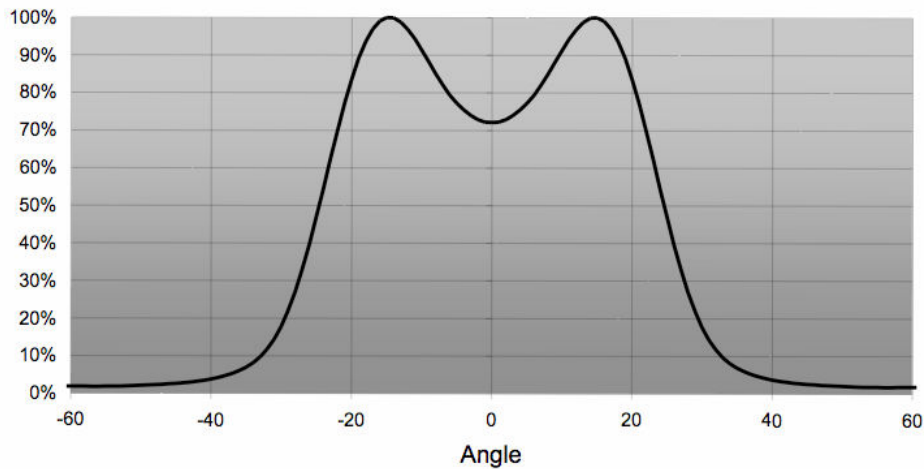

PACKAGING

Lenses are packed in carton boxes of 264 pieces in each box.

DRAWINGS

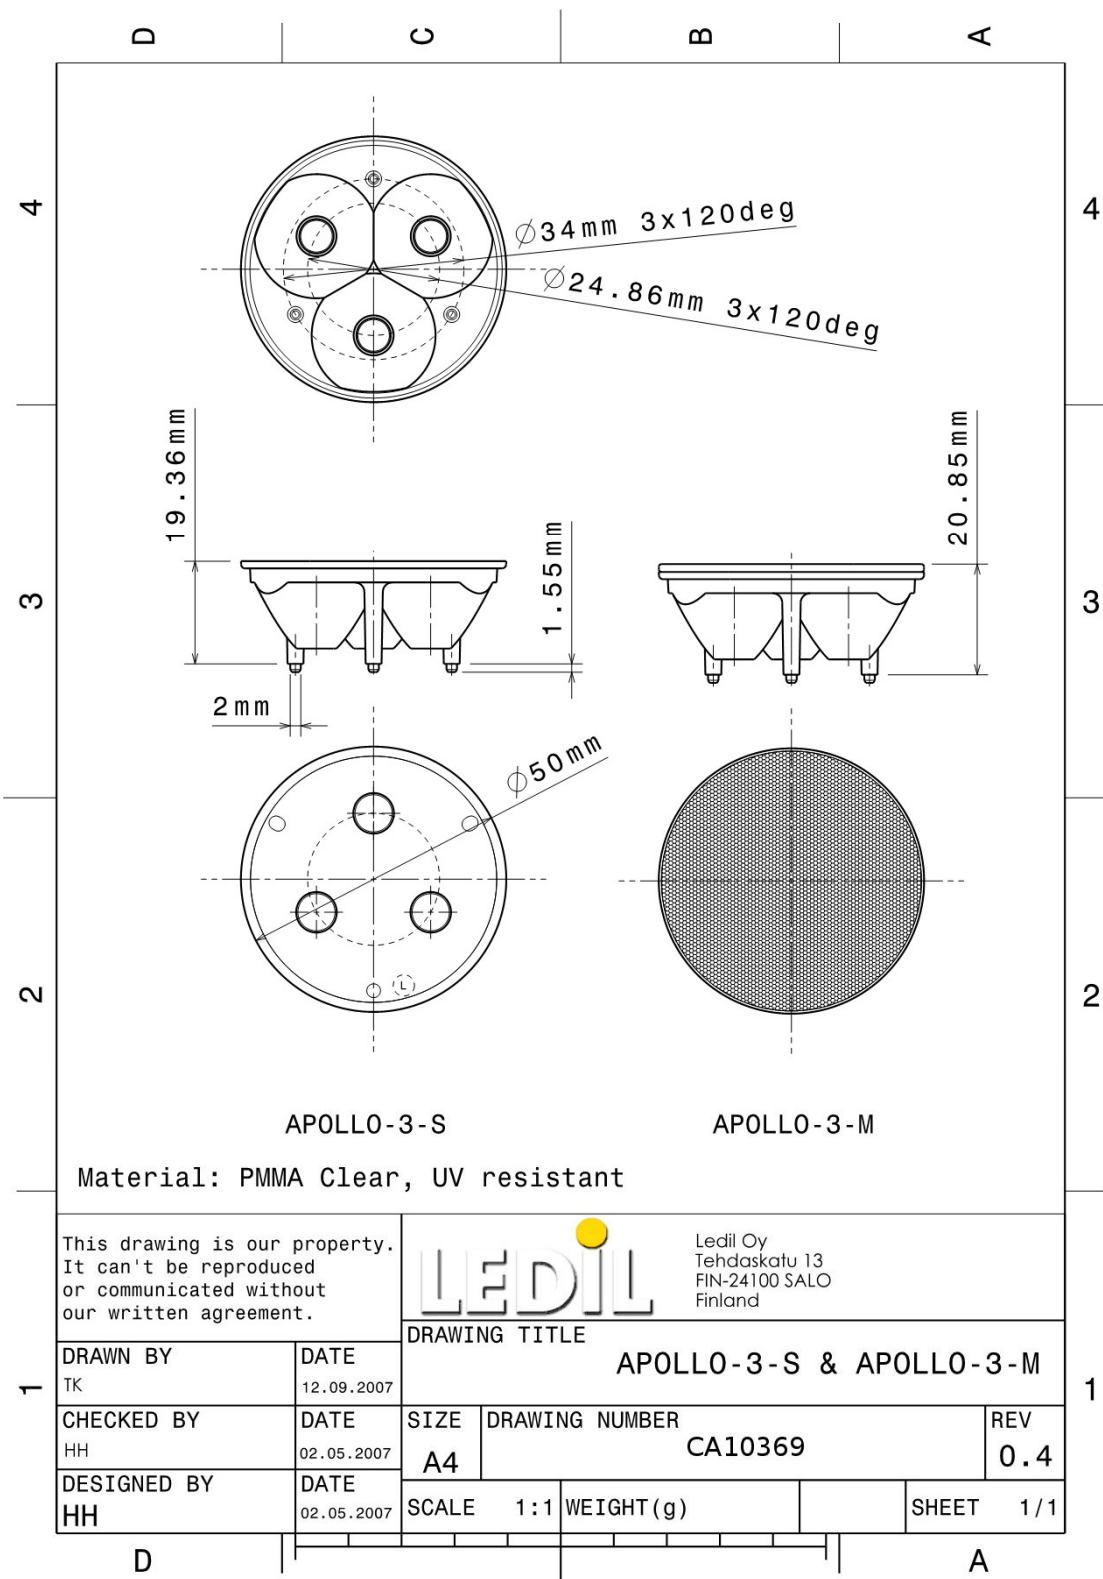

© Ledil Oy – PRELIMINARY - Subject to change without prior notice